

T1SAK3F4 (Kit)

Access & Power Integration Solution for Salto



Altronix T1SAK3F4 kit consists of Trove1 enclosure, TSA1 Salto/Altronix backplane with one (1) 12VDC or 24VDC @ 6A power supply/charger, one (1) fused access power controller, one dual input fused power distribution module and one (1) voltage regulator. This kit also accommodates up to two (2) Salto CU42E0, CU4200 or CU4EB8 modules for up to four (4) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.




T1SAK3F4

Salto boards are not included

Key Features

- 12VDC or 24VDC power supply/charger
- Accommodates up to two (2) Salto CU42E0, CU4200 or CU4EB8 modules
- Convenient knockout configuration:
 - One (1) double knockout
1.948" (1-1/2" Conduit) / 1.701" (1-1/4" Conduit)
 - Nine (9) double knockouts
1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Supervision
 - AC Fail
 - Low Battery and Battery Presence
 - Low power shutdown
- Agency Listings:
 - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
 - UL: UL294 - Access Control System
 - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
 - CE European Conformity
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to two (2) 12VDC/7AH batteries
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Accessories (order separately)



LINQ2

LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/accessories in any metal enclosure or backplane.

Specifications**Power Supply/Charger (eFlow 6NB):****Input**

Voltage	120VAC, 60Hz, 3.5A max.
Input Fuse	5A/250V

Outputs

Voltage	12VDC or 24VDC selectable
Current	6A continuous max.
Auxiliary	Power-limited @ 1A (unswitched)
Other	Overvoltage protection. Filtered and regulated

Battery Charging

Capacity	12VDC/7AH (2 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

Fire Alarm Disconnect

Supervised	Latching or non-latching
EOL	10K Resistor

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 71-73% for 12V units and 70-75% for 24V units (depending on the power supply). Prevents deep battery discharge

Indicators (LED)

Input	120VAC is present
DC Output	Powered

Dual Input Power Distribution Module (PDS8)**Input**

Voltage	24VDC from eFlow6NB and 12VDC from VR6
Input Fuses	10A/32V

Outputs

Voltage	12VDC and/or 24VDC
Any of the eight (8) power outputs are selectable to follow power Input 1 or Input 2	
Individual outputs may be set to OFF position for servicing	
Output Fuses	3A/32V

Indicators (LED)

DC Output	Eight (8) individual output LEDs
Green:	12VDC
Red:	24VDC

Voltage Regulator (VR6):**Input**

Voltage	24VDC from eFlow6NB
---------	---------------------

Output

Voltage	12VDC
Current	6A continuous
Other	Surge suppression

Indicators (LED)

Input	24VDC is present
Output	Powered

Access Power Controller (ACM4):**Input**

Voltage	24VDC from eFlow6NB
Input Fuse	10A/32V

Outputs

Voltage	24VDC
Four (4) independently controlled fused outputs:	
a) Fail-Safe and/or Fail-Secure power outputs.	
Form "C" Relays rated 28VAC or VDC @ 2.5A	
b) Auxiliary power outputs (unswitched)	
c) Any combination of the above	

Output Fuses	3A/32V
--------------	--------

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

T1SAK3F4 Kit:**Agency Listings**

All components of this Trove kit are UL Listed sub-assemblies. Please refer to the corresponding Sub-Assembly Installation Guides for further information.

CE	European Conformity
----	---------------------

Physical and Environmental:**Dimensions (H x W x D)**

Enclosure:	18" x 14.5" x 4.62" (457.2mm x 368.3mm x 118.0mm)
Shipping:	21.75" x 18.25" x 5.75" (552.5mm x 463.6mm x 146.1mm)

Weight (approx.)

Product:	15.5 lb. (7.0 kg)
Shipping:	19.5 lb. (8.9 kg)

Temperature


Operating	0°C to 49°C (32°F to 120°F)
Storage	-20°C to 70°C (-4°F to 158°F)

Relative Humidity

BTU/Hr. (approx.):	12VDC: 40 BTU/Hr. 24VDC: 77 BTU/Hr.
--------------------	----------------------------------------

Access Controller Position Chart for the Following Models:

Salto	Pem Mounting
CU4200, CU42E0, CU4EB8	(A)

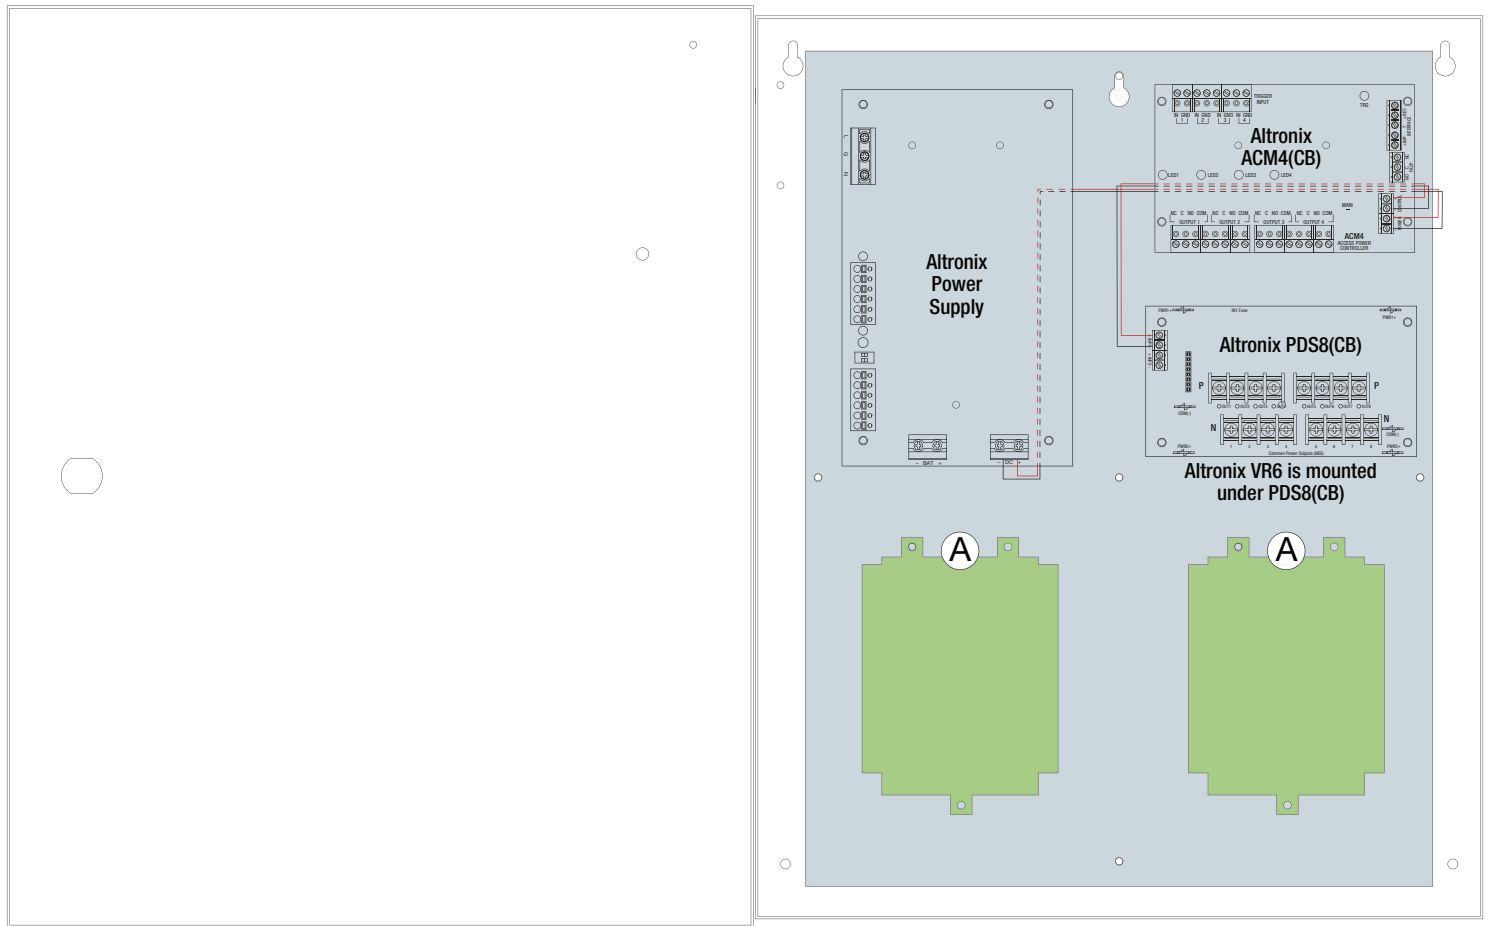

T1SAK3F4 (Kit)

Access & Power Integration Solution for Salto



Dimensions and Drawing

Dimensions (H x W x D approximate)

18" x 14.5" x 4.62" (457.2mm x 368.3mm x 118.0mm)

