


## ACM8

### Multi-Output Access Power Controller

Altronix ACM8 converts one (1) 12 to 24 volt AC or DC input into eight (8) independently controlled fuse protected outputs. These power outputs can be converted to dry form “C” contacts. Outputs are activated by an open collector sink or normally open (NO) dry trigger input from an Access Control System, Card Reader, Keypad, Push Button, PIR, etc. ACM8 will route power to a variety of access control hardware devices including Mag Locks, Electric Strikes, Magnetic Door Holders, etc. Outputs will operate in both Fail-Safe and/or Fail-Secure modes.

This unit is designed to be powered by one common power source which will provide power for both the board operation and locking devices, or two (2) totally independent power sources, one (1) providing power for board operation and the other for lock / accessory power. The FACP Interface enables Emergency Egress, Alarm Monitoring, or may be used to trigger other auxiliary devices. The fire alarm disconnect feature is individually selectable for any or all of the eight (8) outputs.

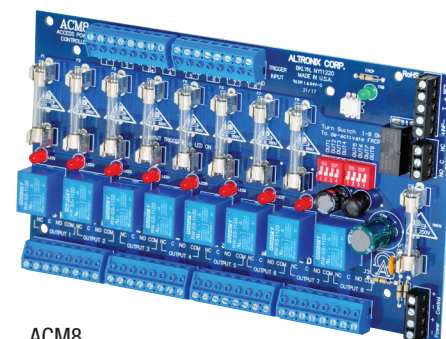

ACM8

## Specifications

### Input

#### Voltage:

- 12 to 24 VAC or VDC operation (setting not required),
- 0.6A @ 12V, 0.3A @ 24V current consumption with all relays energized.
- Main fuse is rated at 10A.

#### Trigger Inputs:

- Eight (8) Access Control System trigger inputs:
  - a) Eight (8) normally open (NO) inputs.
  - b) Eight (8) open collector sink inputs.
  - c) Any combination of the above.

#### Input Options:

- a) One (1) common power input (board and lock power).
- b) Two (2) isolated power inputs (one (1) for board power and one (1) for lock/accessory power).

### Outputs

- Eight (8) independently controlled 2.5A outputs:
  - a) Eight (8) Fail-Safe and/or Fail-Secure power outputs.
  - b) Eight (8) dry form “C” 5A rated relay outputs.
  - c) Any combination of the above.

Eight (8) auxiliary power outputs (unswitched).

#### Output Ratings:

Output fuses are rated 3.5A each.

**Note:** Total output current is determined by the power supply, not to exceed a maximum of 10A total.

### Indicators (LED)

- Red LEDs                      Outputs are triggered (relays energized).
- Green LED                    FACP disconnect is triggered.

### Agency Listings

- UL:
  - Access Control            UL294
- cUL:
  - General Signaling Equipment Evaluated to CSA Standard C22.2 No.205-M1983.

### Physical and Environmental

- Dimensions (W x L x H)
  - 8" x 4" x 0.75" (203.2mm x 114.3mm x 19.1mm).
- Product Weight            0.65 lbs. (0.29 kg).
- Shipping Weight          0.85 lbs. (0.39 kg).
- Temperature
  - Operating                    0°C to 49°C (32°F to 120°F).
  - Storage                        -20°C to 70°C (-4°F to 158°F).
- Relative Humidity          85% +/-5%.
- BTU/Hr (approx.):          4 BTU/Hr.

Mounting hardware included.

### Lifetime Warranty


**ACM8**

Multi-Output Access Power Controller

**Board Dimensions (L x W x H) and Drawing**

8" x 4" x 0.75" (203.2mm x 114.3mm x 19.1mm)

Mounting Holes' Tolerance: +/- 0.04 in. (1mm).

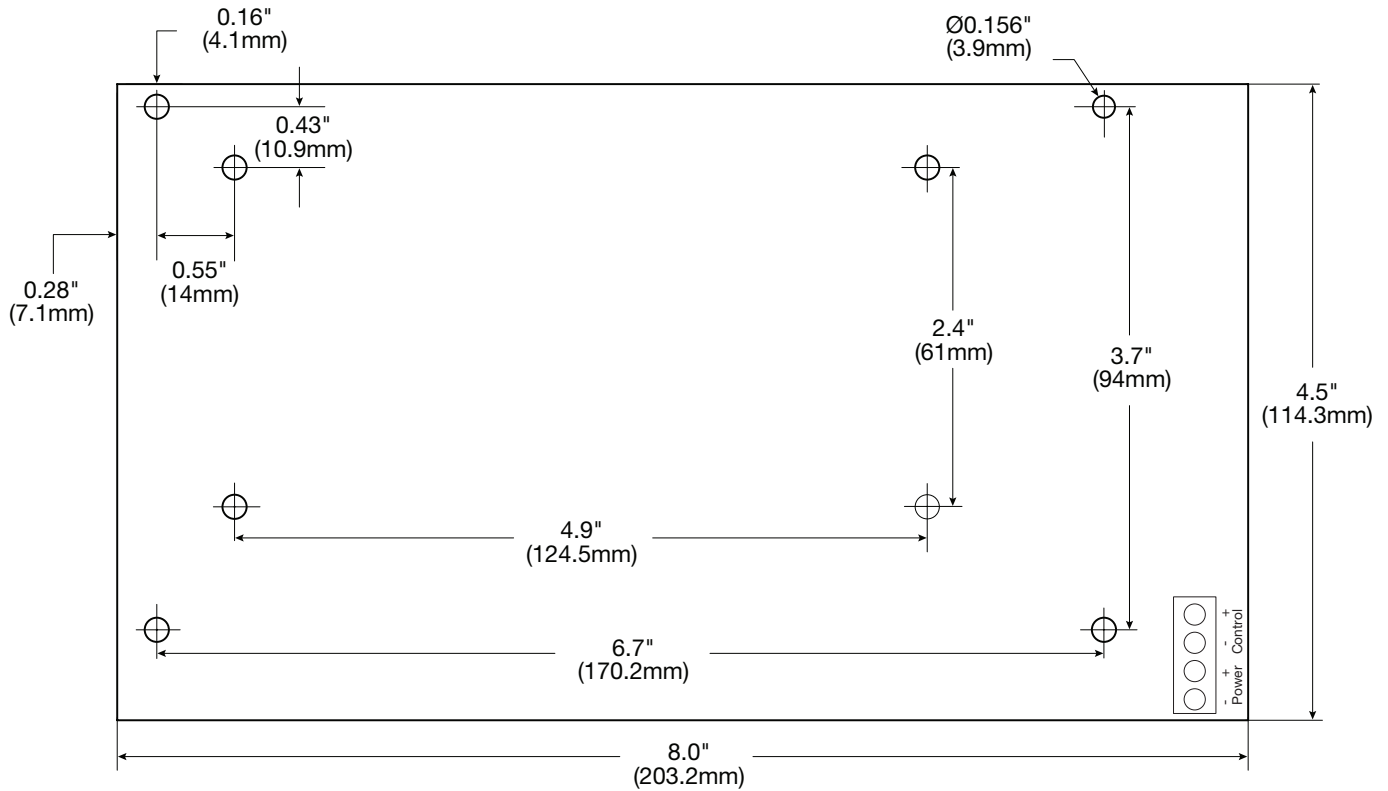**Lifetime Warranty**

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: [info@altronix.com](mailto:info@altronix.com) | [www.altronix.com](http://www.altronix.com)