

T2AGK75F12 (Kit)

Access & Power Integration Solution for AMAG M4000



Altronix T2AGK75F12 kit consists of Trove2 enclosure, TAM2 AMAG/Altronix backplane with one (1) 24VDC @ 10A power supply/charger, one (1) 12VDC @ 10A power supply/charger, one (1) 8-output fused access power controller, one (1) 4-output fused access power controller, and one (1) fused power distribution module.

This kit also accommodate up to three (3) AMAG M4000 modules for up to eight (8) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.



T2AGK75F12

AMAG boards are not included

Key Features

- One (1) 24VDC and one 12VDC power supply/charger
- Accommodates up to three (3) AMAG M4000 modules
- Convenient knockout configuration:
 - One (1) single knockout 2.415" (2" Conduit)
 - Sixteen (16) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Supervision
 - AC Fail
 - Low Battery and Battery Presence
 - Low power shutdown
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Agency Listings:
 - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
 - UL: UL294 - Access Control System
 - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
 - CE European Conformity
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Specifications

Power Supply/Charger 1 (eFlow104NB):

Input
 Voltage 120VAC, 60Hz, 4.5A max.
 Input Fuse 6.3A/250V

Output
 Voltage 24VDC
 Current 10A continuous

Power Supply/Charger 2 (eFlow102NB):

Input
 Voltage 120VAC, 60Hz, 3.5A max.
 Input Fuse 5A/250V

Output
 Voltage 12VDC
 Current 10A continuous

Both Power Supplies:

Outputs
 Auxiliary Class 2 power-limited @ 1A (unswitched)
 Other Overvoltage protection. Filtered and regulated

Battery Charging
 Capacity 12AH/12VDC (4 within enclosure)
 40AH/65AH (requires separate enclosure)

Type Sealed lead acid or gel type
 Failover Upon AC loss, instantaneous
 Batteries are sold separately

Fire Alarm Disconnect

Supervised Latching or non-latching
 EOL 10K Resistor

Supervision

AC Failure Form "C" contacts
 Battery Form "C" contacts

Low DC Power Shutdown
 Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units or 71-73% for 12V units. Prevents deep battery discharge

Indicators (LED)

AC Input 120VAC is present
 DC Output Powered

Access Power Controller (ACM8):

Input
 Voltage 24VDC from eFlow104NB
 Input Fuse 10A/250V

Outputs
 Voltage 24VDC
 Eight (8) independently controlled fused outputs:
 a) Fail-Safe and/or Fail-Secure power outputs
 Form "C" Relays rated 28VAC or VDC @ 2.5A
 b) Auxiliary power outputs (unswitched)
 c) Any combination of the above

Output Fuses 3.5A/250V

Indicators (LED)

Red LEDs Outputs are triggered (relays energized)
 Green LED FACP disconnect is triggered

Access Power Controller (ACM4):

Input
 Voltage 24VDC from eFlow104NB
 Input Fuse 10A/32V

Outputs
 Voltage 24VDC
 Four (4) independently controlled fused outputs:
 a) Fail-Safe and/or Fail-Secure power outputs
 Form "C" Relays rated 28VAC or VDC @ 2.5A
 b) Auxiliary power outputs (unswitched)
 c) Any combination of the above

Output Fuses 3A/32V

Indicators (LED)

Red LEDs Outputs are triggered (relays energized)
 Green LED FACP disconnect is triggered

Power Distribution Module (PD4UL):

Input
 Voltage 12VDC from eFlow102NB

Outputs
 Voltage 12VDC
 Four (4) fuse protected outputs
 3.5A per output max.
 Output Fuses 3.5A/250V

Indicators (LED)

Green LED DC Output

T2AGK75F12 Kit:

Agency Listings

All components of this Trove kit are UL Listed sub-assemblies
 Please refer to the corresponding Sub-Assembly Installation Guides
 for further information

CE European Conformity

Physical and Environmental:

Dimensions (H x W x D)
 Enclosure: 27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)
 Shipping: 32.5" x 26.5" x 11.125" (825.5mm x 673.1mm x 282.6mm)


Weight (approx.)
 Product: 55.5 lb. (25.2 kg)
 Shipping: 60.5 lb. (27.4 kg)

Temperature
 Operating 0°C to 49°C (32°F to 120°F)
 Storage - 20°C to 70°C (- 4°F to 158°F)

Relative Humidity
 85% +/- 5%
BTU/Hr. (approx.): 177 BTU/Hr.

Access Controller Position Chart for the Following Models:

AMAG	Pem Mounting
M4000-DEC4, M4000-DEC4 w/M4000-DBB, M4000-IOC20/16	(A)

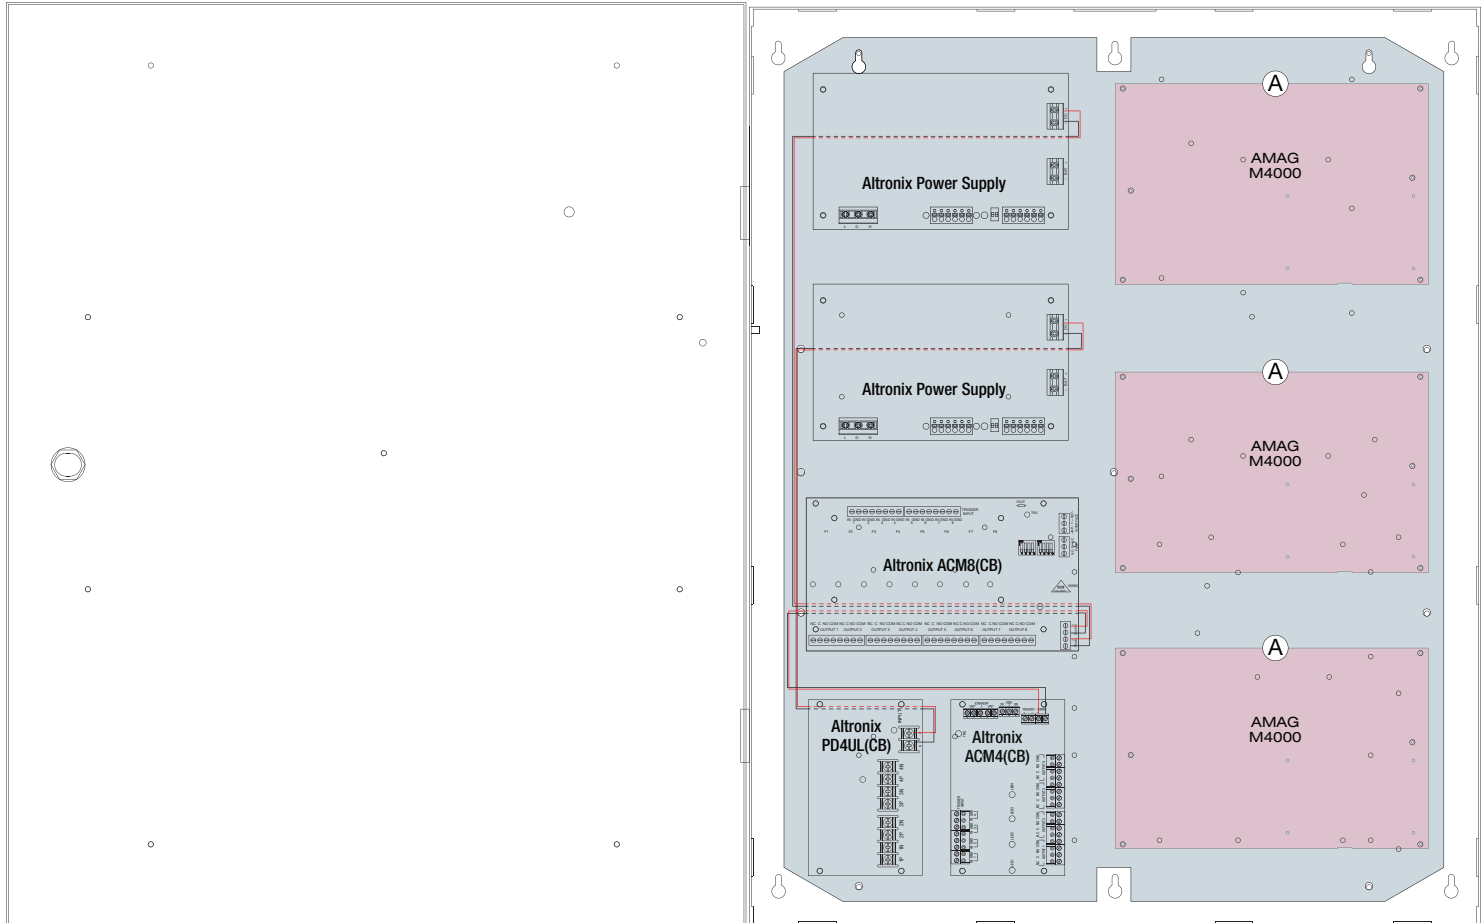

Accessories (order separately)



LINQ2

LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC
with
batteries



Trove2BWC
with
wires



TROVE2BWC - Battery/Wire Trough Enclosure

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution. The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets. Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

Dimensions and Drawing

Dimensions (H x W x D approximate)
 27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

