

**T2KE3316V (Kit)**

Access &amp; Power Integration Solution for Kisi

**TROVE™**

Altronix T2KE3316V kit consists of Trove2 enclosure, TDR2 Kisi/Altronix backplane with two (2) 12 or 24VDC @ 6A power supply/chargers, and two eight (8) fuse protected output access control modules. This kit also accommodates up to four (4) Kisi Pro Controllers for up to sixteen (16) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.



T2KE3316V

*Kisi boards are not included***Key Features**

- 12 or 24VDC power supply/chargers
- Accommodates up to four (4) Kisi Pro Controllers
- Includes twenty (20) mounting magnets for Kisi Pro Controller
- Convenient knockout configuration:
  - One (1) single knockout 2.415" (2" Conduit)
  - Sixteen (16) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Supervision
  - AC Fail
  - Battery Fail and Battery Presence
- Agency Listings:
  - CE European Conformity
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Lifetime Warranty\*

*\*Altronix Power Supply/Chargers and Sub-Assemblies only*

## Specifications

### Two (2) Power Supply/Chargers (AL600XB220):

#### Input

Voltage	220VAC (range 198VAC-256VAC), 50/60Hz, 3A
Input Fuse	5A/250V

#### Outputs

Voltage	12VDC or 24VDC selectable.
Current	6A @ 12VDC or 24VDC continuous max.
Other	Overvoltage protection. Filtered and regulated

### Battery Charging

Capacity	12AH/12VDC (2 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

### Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

### Indicators (LED)

Input	220VAC is present
DC Output	Powered
Battery	Discharged or not connected

### Two (2) Access Power Controllers (ACM8):

#### Input

Voltage	24VDC from AL600XB220
Input Fuse	10A/250V

#### Outputs

Voltage	24VDC
Eight (8) 24VDC independently controlled fused outputs:	
a) Fail-Safe and/or Fail-Secure power outputs	
Form "C" Relays rated 28VAC or VDC @ 2.5A	
b) Auxiliary power outputs (unswitched)	
c) Any combination of the above	

Output Fuses	3.5A/250V
--------------	-----------

### Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

### T2KE3316V Kit:

### Agency Listings

CE	European Conformity
----	---------------------

### Physical and Environmental

#### Dimensions (H x W x D)

Enclosure:	27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)
Shipping:	32.5" x 26.5" x 11.125" (825.5mm x 673.1mm x 282.6mm)

#### Weight (approx.)

Product	54.7 lb. (24.8 kg)
Shipping	59.7 lb. (27.1 kg)

#### Temperature

Operating	0°C to 49°C (32°F to 120°F)
Storage	- 20°C to 70°C (- 4°F to 158°F)


#### Relative Humidity

#### BTU/Hr (approx.):

85% +/- 5%
12VDC: 74 BTU/Hr.
24VDC: 148 BTU/Hr.
12VDC and 24VDC: 111 BTU/Hr.

### Access Controller Position Chart for the Following Models:

Kisi	Pem Mounting
Pro Controller	(A)

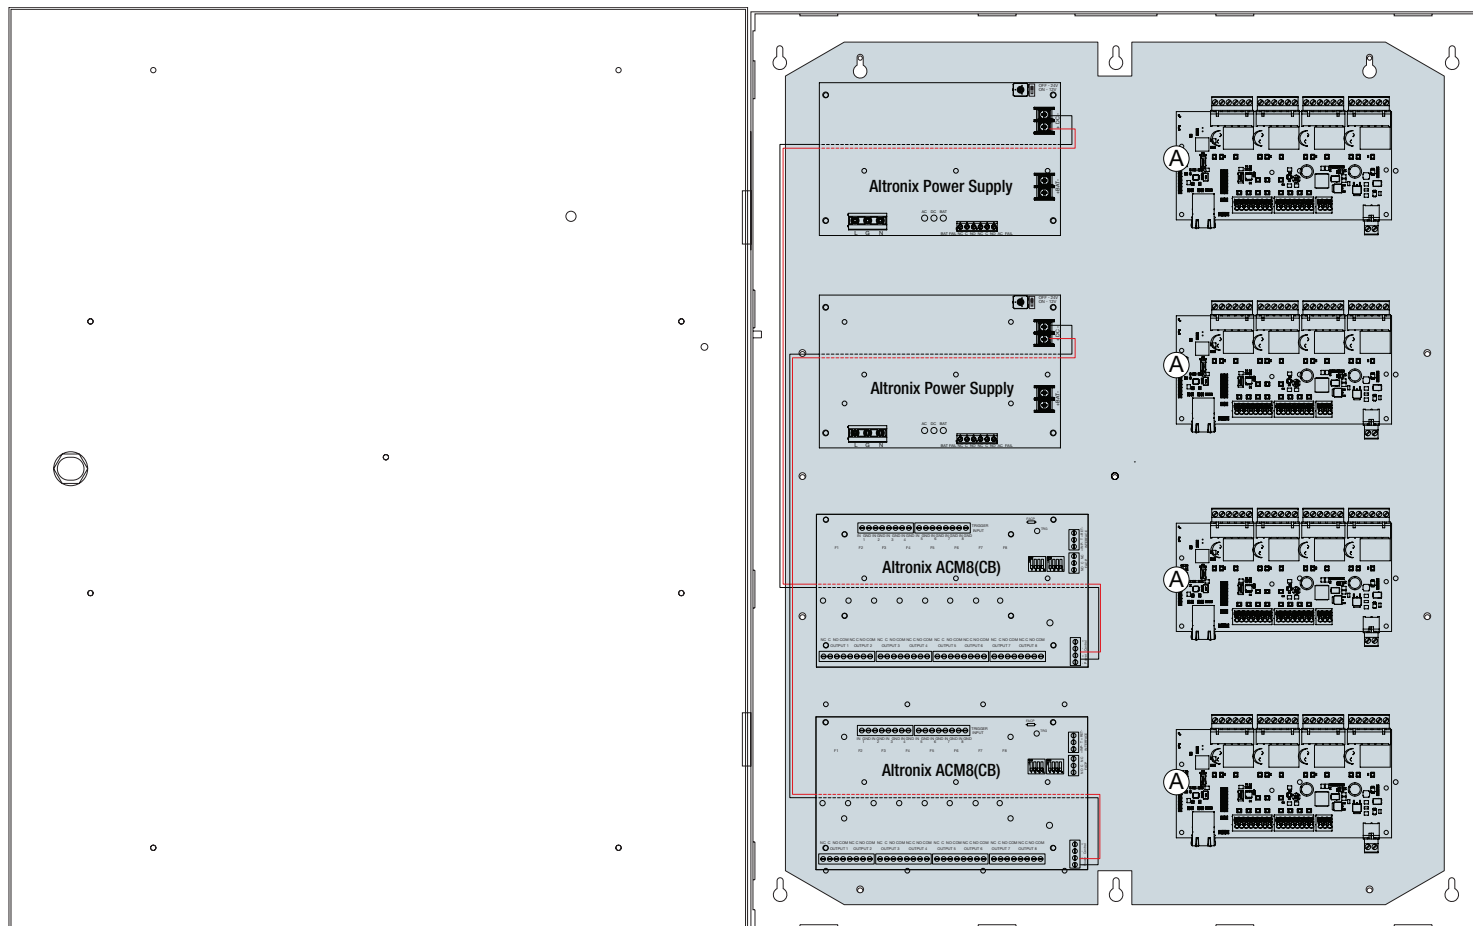

**Accessories** (order separately)

WM5

**WM5, WM25, WM100 - Magnetic Cable Tie Mounts**

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

**MM4, MM8, MM12, MM24 - Magnetic Mounting Solution**

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

**BR1 - Sub-Assembly Mounting Bracket**

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC  
with  
batteriesTrove2BWC  
with  
wires**TROVE2BWC - Battery/Wire Trough Enclosure**

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution. The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets. Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

## Dimensions and Drawing

Dimensions (H x W x D approximate)

27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

