

T2M7CK1D (Pre-wired Kit)

Access and Power Integration Solution for Mercury



Altronix T2M7CK1D is a 8-door access and power integration kit which includes Altronix power and sub-assemblies along with factory installed wire management and wire assemblies that are pre-configured with terminal blocks for Mercury* hardware. This unit provides ample power and dual voltage outputs to support Mercury platform controllers and locking devices. The T2M7CK1D accommodates one (1) Intelligent Dual Reader Controller and three (3) Dual Reader Interface Modules. Trove Plus simplifies field installations and provides reliable, robust critical power and control for the most demanding applications.

***Also compatible with these authentic Mercury partners:**

AccessNsite, Avigilon, BadgePass, BluBox, Feenics, Genetec, Identicon, IMRON, Johnson Controls, Kastle, Keri Systems, Lenel/S2, LockState, Maxxess, Midpoint Security, NLSS, Open Options, Panasonic i-PRO MonitorCast, Quintron, RS2, S2 Security, Schneider Electric, Vanderbilt



T2M7CK1D - includes
eFlow104NB, ACMS8CB, VR6, PDS8CB,
wire harnesses and management

Mercury boards are not included

Key Features

- Accommodates the following Mercury controllers:
 - 1 - LP1502 / LP4502 and 3 - MR52
- Convenient knockout configuration:
 - One (1) single knockout - 2" Conduit
 - Sixteen (16) double knockouts - 1/2" Conduit and 3/4" Conduit
- Unit includes:
 - Removable backplane
 - Wire management
 - Custom wire assemblies for power distribution with terminal blocks for controller connections
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Supervision
 - AC Fail
 - Battery Fail and Battery Presence
 - Low power shutdown
- CE European Conformity
- Enclosure accommodates up to four (4) 12VDC/7AH batteries
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Specifications

Power Supply (eFlow104NB):

Input

| | |
|------------|------------------------|
| Voltage | 120VAC, 60Hz, 4.5A max |
| Input Fuse | 6.3A/250V |

Output

| | |
|------------|--|
| Voltage | 24VDC @ 10A |
| Auxiliary | 1A (unswitched) |
| Protection | Overvoltage protection. Filtered and regulated |

Battery Charging

| | |
|-------------------------------|---|
| Capacity | 12VDC/7AH (4 within enclosure) 40AH/65AH (requires separate enclosure) |
| Type | Sealed lead acid or gel type |
| Failover | Upon AC loss, instantaneous |
| Batteries are sold separately | |

Fire Alarm Disconnect

| | |
|------------|--------------------------|
| Supervised | Latching or non-latching |
| EOL | 10K Resistor |

Supervision

| | |
|------------|-------------------|
| AC Failure | Form "C" contacts |
| Battery | Form "C" contacts |

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units (depending on the power supply).
Prevents deep battery discharge

Indicators (LED)

| | |
|-----------|-----------------------------|
| AC Input | 120VAC is present |
| DC Output | 24VDC is present |
| Battery | Discharged or not connected |

Dual Input Access Power Controller (ACMS8CB):

Input

| | |
|------------|--|
| Voltage | 24VDC from eFlow104NB and 12VDC from VR6 |
| Input PTCs | 9A |

Outputs

| | |
|---|--------------------|
| Voltage | 12VDC and/or 24VDC |
| Eight (8) selectable independently controlled outputs or eight (8) independently controlled Form "C" relay outputs: | |
| a) Fail-Safe and/or Fail-Secure power outputs | |
| b) Form "C" Relays. 28VAC or VDC @ 2.5A Rated | |
| c) Auxiliary power outputs (unswitched) | |
| d) Any combination of the above | |

Any of the eight (8) PTC protected power outputs are selectable to follow power Input 1 or Input 2

Individual outputs may be set to OFF position for servicing

| | |
|-------------|------|
| Output PTCs | 2.5A |
|-------------|------|

Indicators (LED)

| | |
|--------------------------|--|
| Red LEDs | Outputs are triggered (relays energized) |
| Blue LED | FACP disconnect is triggered |
| Individual voltage LEDs: | |
| Green: | 12VDC |
| Red: | 24VDC |

Voltage Regulator (VR6):

Input

| | |
|---------|-----------------------|
| Voltage | 24VDC from eFlow104NB |
|---------|-----------------------|

Output

| | |
|---------|-------------------|
| Voltage | 12VDC |
| Current | 6A continuous |
| Other | Surge suppression |

Indicators (LED)

| | |
|--------|------------------|
| Input | 24VDC is present |
| Output | Powered |

Dual Input Power Distribution Module (PDS8CB):

Input

| | |
|------------|--|
| Voltage | 24VDC from eFlow104NB and 12VDC from VR6 |
| Input PTCs | 9A |

Outputs

| | |
|--|--------------------|
| Voltage | 12VDC and/or 24VDC |
| Any of the eight (8) power outputs are selectable to follow power Input 1 or Input 2 | |
| Individual outputs may be set to OFF position for servicing | |
| Output PTCs | 2.5A |

Indicators (LED)

| | |
|-----------|----------------------------------|
| DC Output | Eight (8) individual output LEDs |
| Green: | 12VDC |
| Red: | 24VDC |

T2M7CK1D Kit:

Agency Listings

CE European Conformity
All components of this Trove kit are UL Listed sub-assemblies
Please refer to the corresponding Sub-Assembly Installation Guides for further information

Physical and Environmental:

Dimensions (H x W x D)

Enclosure: 27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)
Shipping: 32.5" x 26.5" x 11.125" (825.5mm x 673.1mm x 282.6mm)

Weight (approx.)

| | |
|-----------|---------------------|
| Product: | 41.6 lb. (18.87 kg) |
| Shipping: | 45.6 lb. (20.68 kg) |

Temperature

| | |
|-----------|-------------------------------|
| Operating | 0°C to 49°C (32°F to 120°F) |
| Storage | -20°C to 70°C (-4°F to 158°F) |


Relative Humidity

85% +/- 5%

BTU/Hr. (approx.): 145 BTU/Hr.

T2M7CK1D (Pre-wired Kit)

Access and Power Integration Solution for Mercury

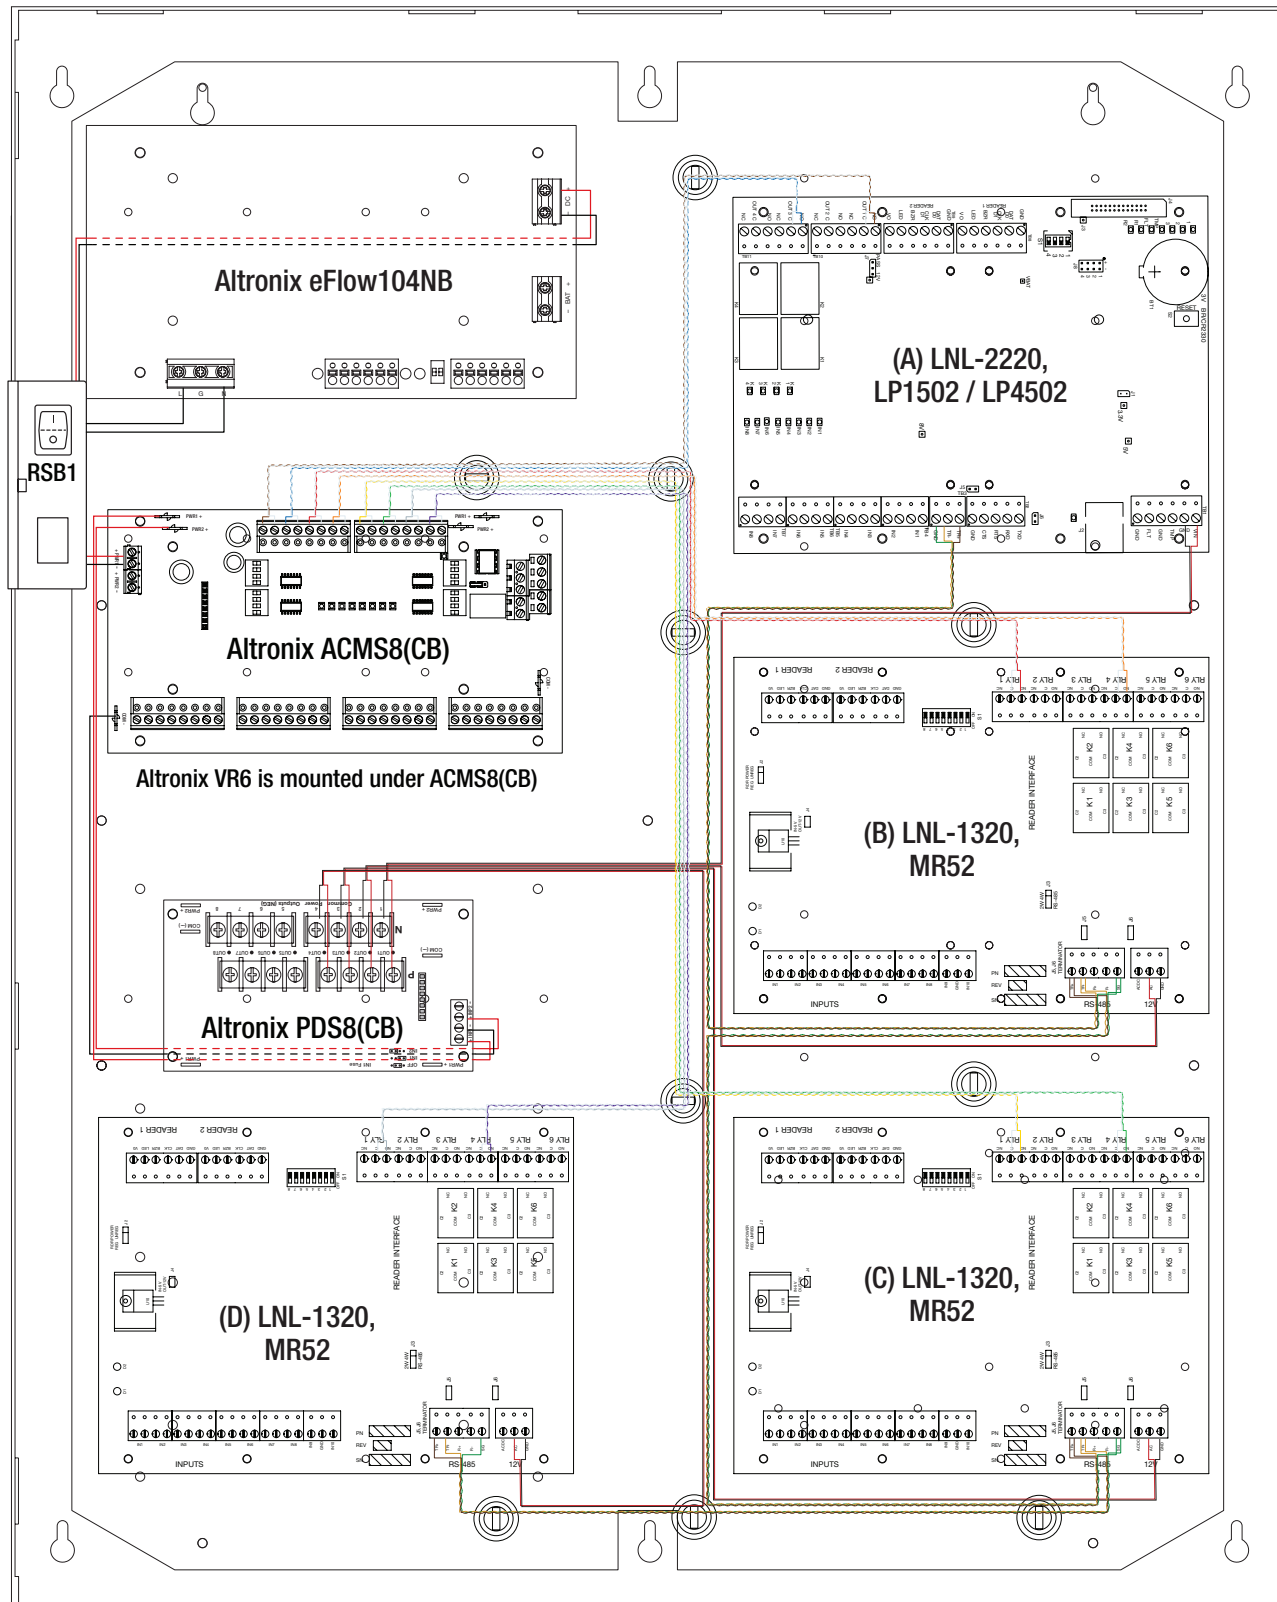

Accessories (order separately) —



LINQ2

LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC
with
batteries



Trove2BWC
with
wires



TROVE2BWC - Battery/Wire Trough Enclosure

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution. The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets. Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

Dimensions and Drawing

Dimensions (H x W x D approximate)

27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

