

SMP10WP24

Outdoor DC Power Supply/Charger

Altronix SMP10WP24 DC Outdoor Power Supply/Charger provides 24VDC and is designed to be conveniently located where power is required. 16 GA steel enclosure finished with heat fused polyester powder is NEMA 4/4X, IP66-11 Rated for outdoor use. It features turn lock and integral flanges to simplify wall or pole mounting.



SMP10WP24

Specifications

Input

Voltage 115VAC, 60Hz, 2.7A

Outputs

Voltage 24VDC
 Current 10A continuous supply current
 Other Short circuit and thermal overload protection
 Filtered and regulated

Battery Charging

Type Sealed lead acid or gel type
 Failover Upon AC loss, instantaneous
 Batteries are sold separately
 Separate ventilated enclosure is required

Indicators (LED)

Input Input voltage is present
 DC Output Powered

Agency Listings

CE European Conformity

Physical and Environmental

NEMA 4 Rated enclosure for outdoor use

Dimensions (H x W x D)

Enclosure:
 12" x 8" x 6" (304.8mm x 203.2mm x 152.4mm)
 Shipping:
 18" x 14" x 10" (457.2mm x 355.6mm x 254mm)

Weight (approx.)

Product: 9.9 lb. (4.5 kg)
 Shipping: 11 lb. (5.0 kg)


Temperature

Operating: -40°C to 60°C (-40°F to 140°F)
 Storage: -40°C to 70°C (-40°F to 158°F)

Relative Humidity 85% +/- 5%

BTU/Hr. (approx.): 123 BTU/Hr.

Accessories (order separately)



PMK1

PMK1 - Pole Mount Kit

PMK1 pole mount kit is designed to simplify installation of outdoor units. It accommodates 2" - 8" (diameter) poles.

Lifetime Warranty


SMP10WP24

Outdoor DC Power Supply/Charger

Dimensions and Drawing

Dimensions (H x W x D approximate)

12" x 8" x 6" (304.8mm x 203.2mm x 152.4mm)

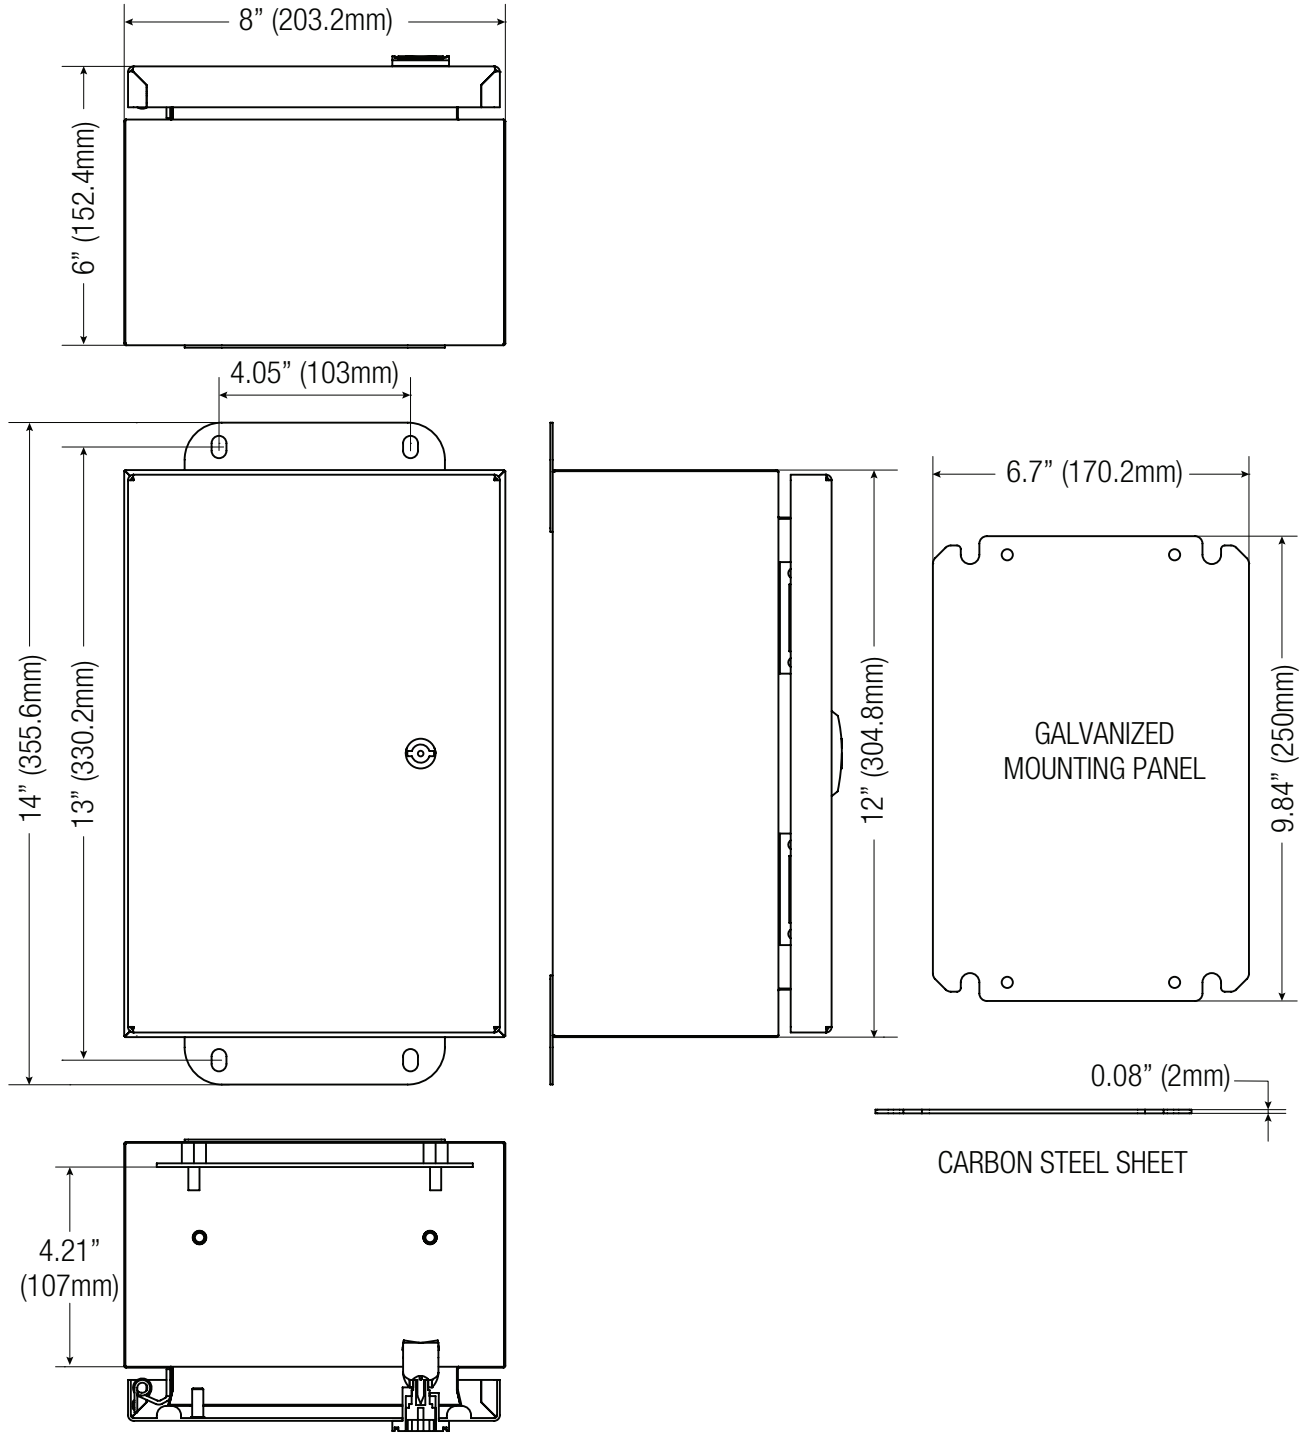

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com