

SMP3WP

Outdoor DC Power Supply/Charger

Altronix SMP3WP DC Outdoor Power Supply/Charger provides 12VDC or 24VDC and is designed to be conveniently located where power is required. 16 GA steel enclosure finished with heat fused polyester powder is NEMA 4/4X, IP66-11 Rated for outdoor use. It features turn lock and integral flanges to simplify wall or pole mounting.



SMP3WP

Specifications

Input

Voltage 115VAC, 60Hz, 0.95A or
230VAC, 50Hz, 0.6A

Outputs

Voltage 12VDC or 24VDC selectable
Current 2.5A continuous supply current
Other Short circuit and thermal overload protection
Filtered and regulated

Battery Charging

Type Sealed lead acid or gel type
Failover Upon AC loss, instantaneous
Batteries are sold separately
Separate ventilated enclosure is required

Indicators (LED)

Input Input voltage is present
DC Output Powered

Agency Listings

CE European Conformity

Physical and Environmental

NEMA 4 Rated enclosure for outdoor use

Dimensions (H x W x D)

Enclosure:
12" x 8" x 6" (304.8mm x 203.2mm x 152.4mm)
Shipping:
18" x 14" x 10" (457.2mm x 355.6mm x 254mm)

Weight (approx.)

Product: 9.9 lb. (4.5 kg)
Shipping: 11 lb. (5.0 kg)

Temperature

Operating: - 40°C to 60°C (- 40°F to 140°F)
Storage: - 40°C to 70°C (- 40°F to 158°F)

Relative Humidity 85% +/- 5%

BTU/Hr (approx.):

12VDC: 15 BTU/Hr.
24VDC: 31 BTU/Hr.

Accessories (order separately)



PMK1

PMK1 - Pole Mount Kit

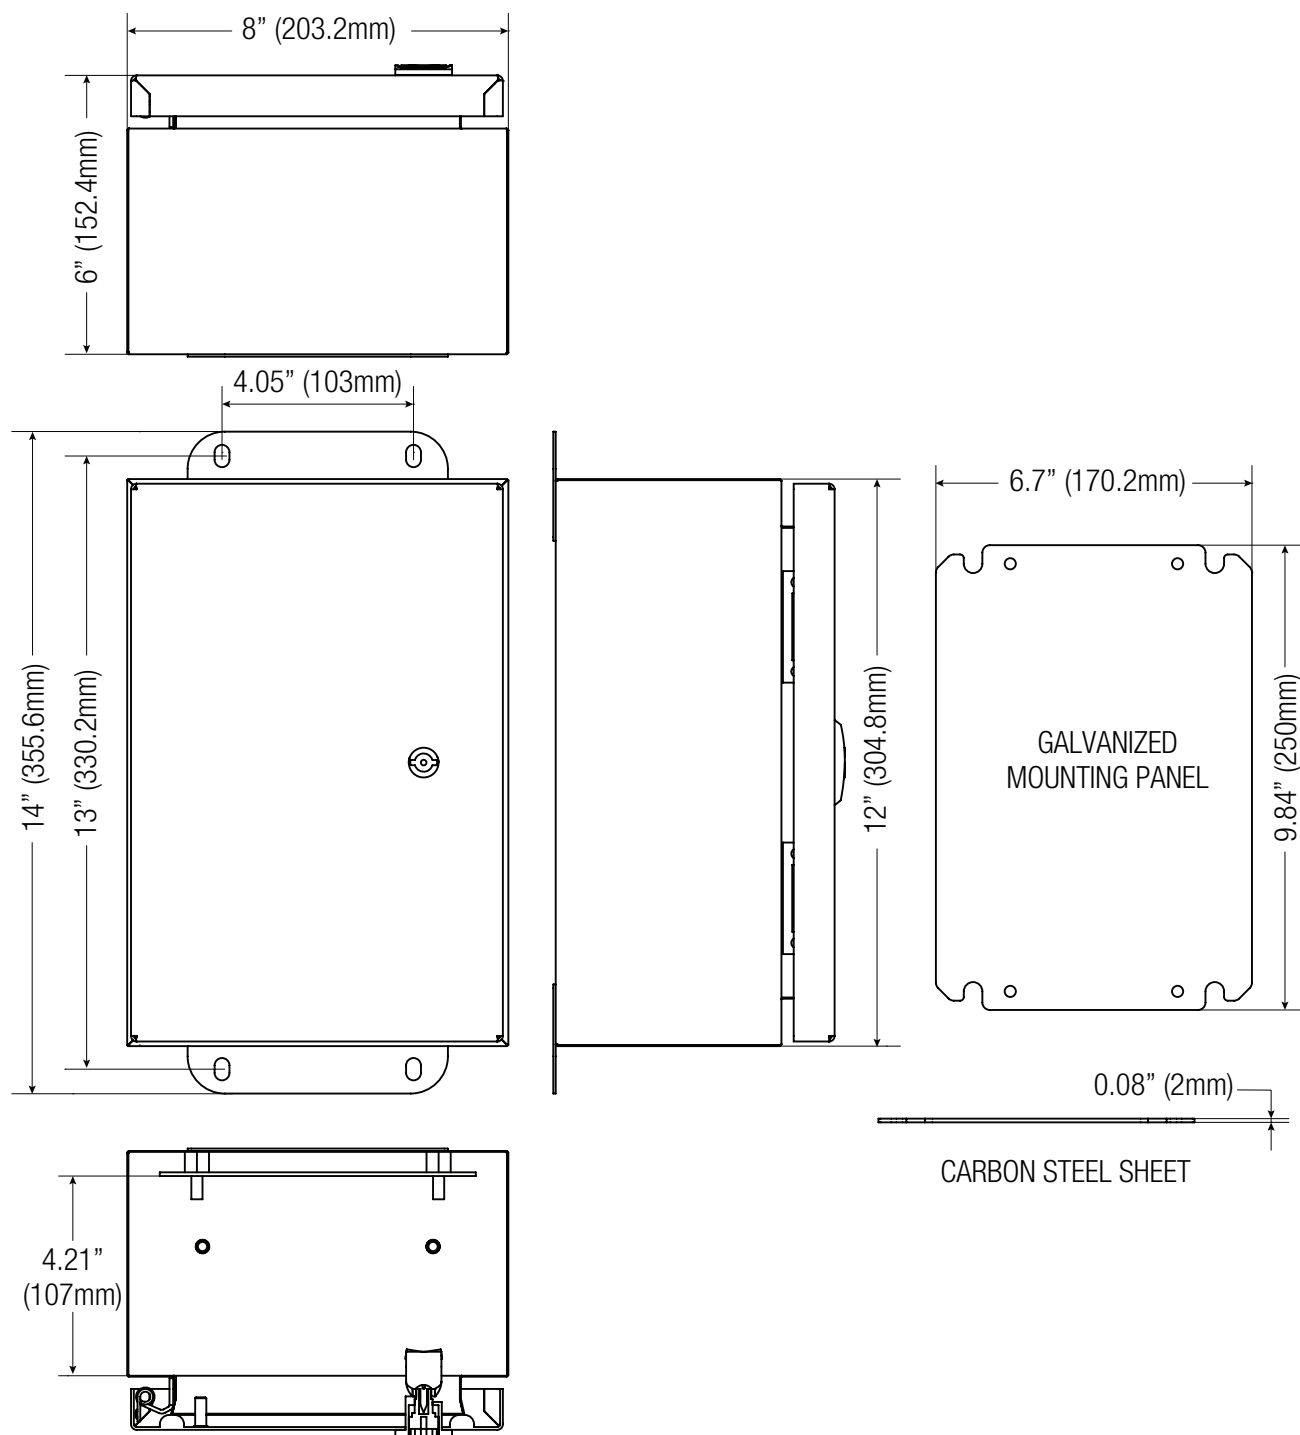
PMK1 pole mount kit is designed to simplify installation of outdoor units.
It accommodates 2" - 8"(diameter) poles.

Lifetime Warranty

Dimensions and Drawing

Dimensions (H x W x D approximate)

12" x 8" x 6" (304.8mm x 203.2mm x 152.4mm)

**Lifetime Warranty**

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com