

## SMP7WPV

### Outdoor DC Power Supply/Charger

Altronix SMP7WPV DC Outdoor Power Supply/Charger provides 12VDC or 24VDC and is designed to be conveniently located where power is required. 16 GA steel enclosure finished with heat fused polyester powder is NEMA 4/4X, IP66-11 Rated for outdoor use. It features turn lock and integral flanges to simplify wall or pole mounting.



SMP7WPV

### Specifications

#### Input

Voltage 230VAC (working range 198VAC-256VAC), 50Hz, 0.95A

#### Outputs

Voltage 12VDC or 24VDC selectable  
 Current 6A continuous supply current  
 Other Short circuit and thermal overload protection  
 Filtered and regulated

#### Battery Charging

Type Sealed lead acid or gel type  
 Failover Upon AC loss, instantaneous  
 Batteries are sold separately  
 Separate ventilated enclosure is required

#### Indicators (LED)

Input Input voltage is present  
 DC Output Powered

#### Agency Listings

CE European Conformity

### Physical and Environmental

NEMA 4 Rated enclosure for outdoor use

#### Dimensions (H x W x D)

Enclosure: 12" x 8" x 6" (304.8mm x 203.2mm x 152.4mm)  
 Shipping: 18" x 14" x 10" (457.2mm x 355.6mm x 254mm)

#### Weight (approx.)

Product: 9.9 lb. (4.5 kg)  
 Shipping: 11 lb. (5.0 kg)

#### Temperature

Operating: - 40°C to 60°C (- 40°F to 140°F)  
 Storage: - 40°C to 70°C (- 40°F to 158°F)

#### Relative Humidity

85% +/- 5%

#### BTU/Hr (approx.):

12VDC: 37 BTU/Hr.  
 24VDC: 74 BTU/Hr.

### Accessories (order separately)



PMK1

#### PMK1 - Pole Mount Kit

PMK1 pole mount kit is designed to simplify installation of outdoor units. It accommodates 2" - 8" (diameter) poles.

### Lifetime Warranty


# SMP7WPV

Outdoor DC Power Supply/Charger

## Dimensions and Drawing

Dimensions (H x W x D approximate)

12" x 8" x 6" (304.8mm x 203.2mm x 152.4mm)

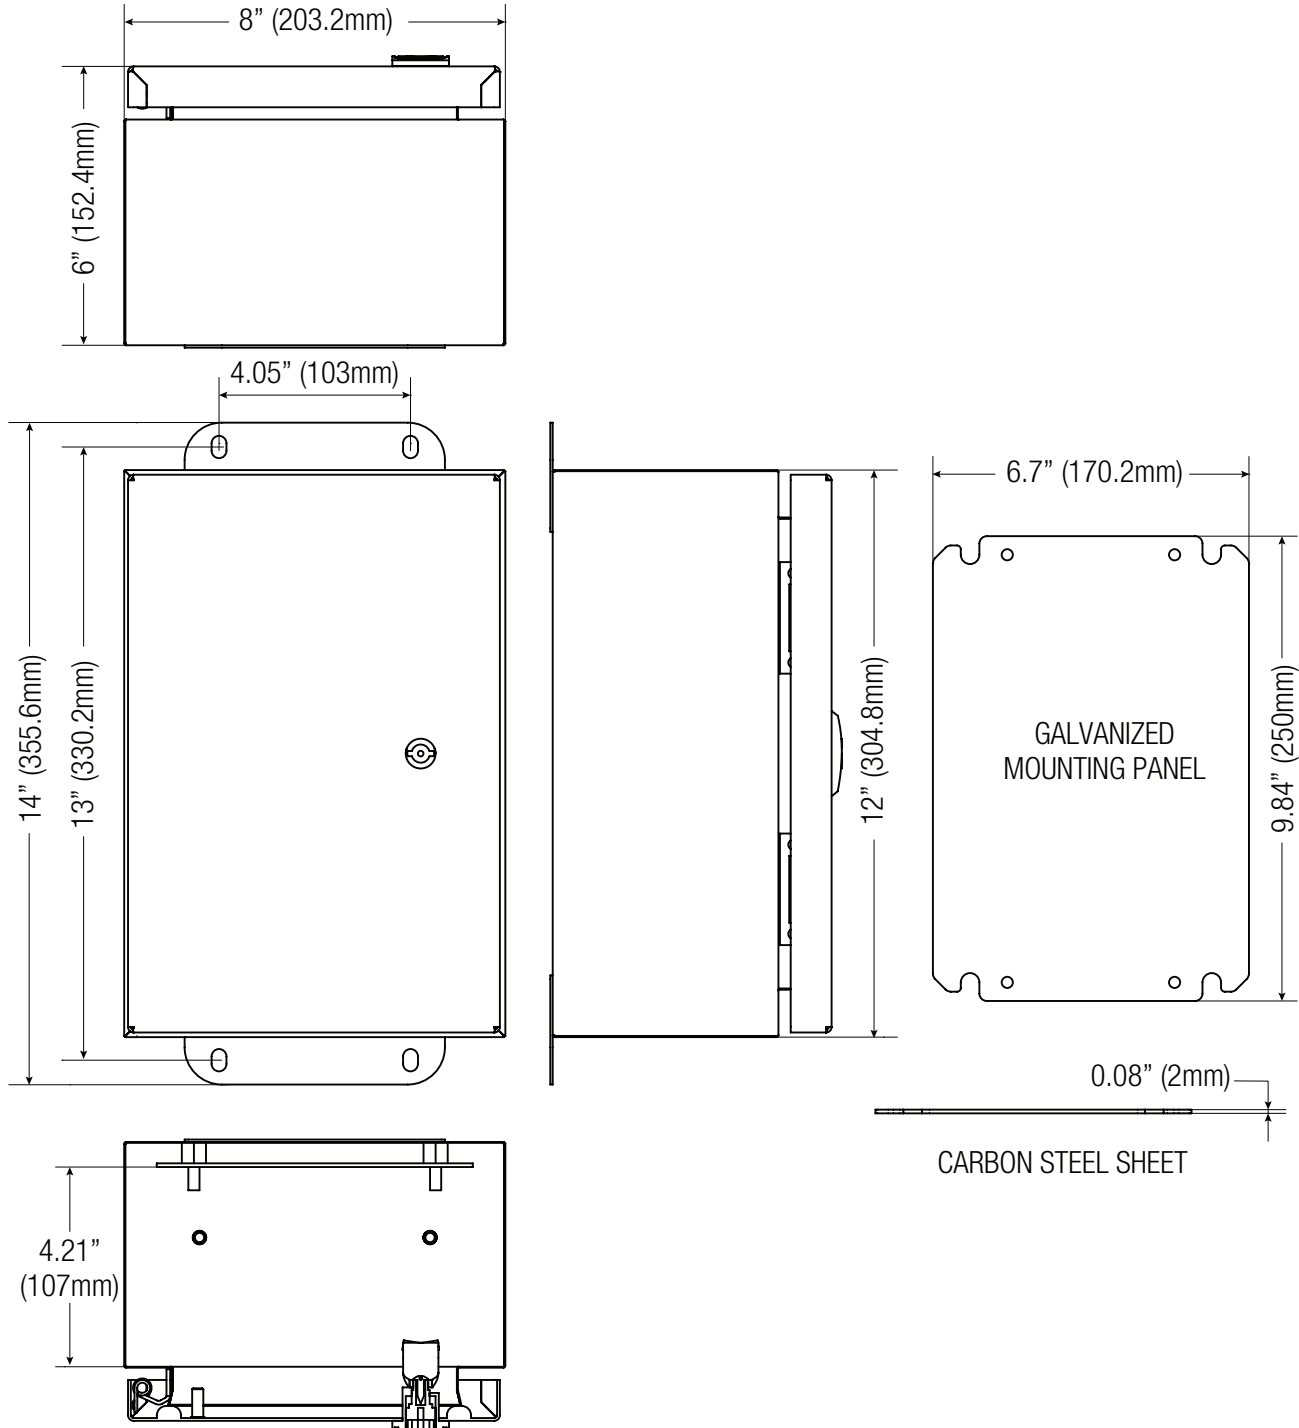

### Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com