

T2PHK3316D (Kit)

Access & Power Integration Solution for Openpath

TROVE™

Altronix T2PHK3316D kit consists of Trove2 enclosure, TCV2 Openpath/Altronix backplane with two (2) 12 or 24VDC @ 6A power supply/chargers and two eight (8) PTC protected output access control modules. This kit also accommodates up to two (2) Openpath Core, two (2) Elevator Board, two (2) 4-Port or 8-Port modules for up to sixteen (16) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.

openpath**T2PHK3316D***Openpath boards are not included***Key Features**

- 12VDC or 24VDC power supply/chargers
- Accommodates up to two (2) Openpath OP-ACC, OP16EM, and two (2) OP-EX-4E or OP-X-8E modules
- Convenient knockout configuration:
 - One (1) single knockout 2.415" (2" Conduit)
 - Sixteen (16) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Supervision
 - AC Fail
 - Low Battery and Battery Presence
- Agency Listings:
 - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
 - UL: UL294 - Access Control System.
 - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
 - CE European Conformity
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Specifications**Two (2) Power Supply/Chargers (AL600ULXB):****Input**

Voltage	115VAC, 60Hz, 3.5A max.
Input Fuse	5A/250V

Output

Voltage	12VDC or 24VDC selectable
Current	6A @ 12VDC or 24VDC continuous max.
Other	Overvoltage protection. Filtered and regulated

Battery Charging

Capacity	12VDC/12AH (2 within enclosure) 40AH/65AH (requires separate enclosure)
----------	--

Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous

Batteries are sold separately

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Indicators (LED)

Input	115VAC is present
DC Output	Powered
Battery	Discharged or not connected

Two (2) Access Power Controllers (ACM8CB):**Input**

Voltage	24VDC from AL600ULXB
Input Fuse	10A/250V

Outputs

Voltage	24VDC
Eight (8) 24VDC independently controlled PTC outputs:	
a) Fail-Safe and/or Fail-Secure power outputs	
Form "C" Relays rated 28VAC or VDC @ 2.5A	
b) Auxiliary power outputs (unswitched)	
c) Any combination of the above	

Output PTCs	2.5A
-------------	------

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

T2PHK3316D Kit:**Agency Listings**

All components of this Trove kit are UL Listed sub-assemblies. Please refer to the corresponding Sub-Assembly Installation Guides for further information

CE European Conformity

Physical and Environmental**Dimensions (H x W x D)**

Enclosure:
27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

Shipping:
32.5" x 26.5" x 11.125" (825.5mm x 673.1mm x 282.6mm)

Weight (approx.)

Product	54.7 lb. (24.8 kg)
Shipping	59.7 lb. (27.1 kg)

Temperature

Operating	0°C to 49°C (32°F to 120°F)
Storage	-20°C to 70°C (-4°F to 158°F)

Relative Humidity


85% +/- 5%

BTU/Hr (approx.):

12VDC:	74 BTU/Hr
24VDC:	148 BTU/Hr
12VDC and 24VDC:	111 BTU/Hr

Access Controller Position Chart for the Following Models:

Openpath	Pem Mounting
OP-ACC	(A)
OP-EX-4E	(B)
OP-EX-8E	(C)
OP-16EM	(D)

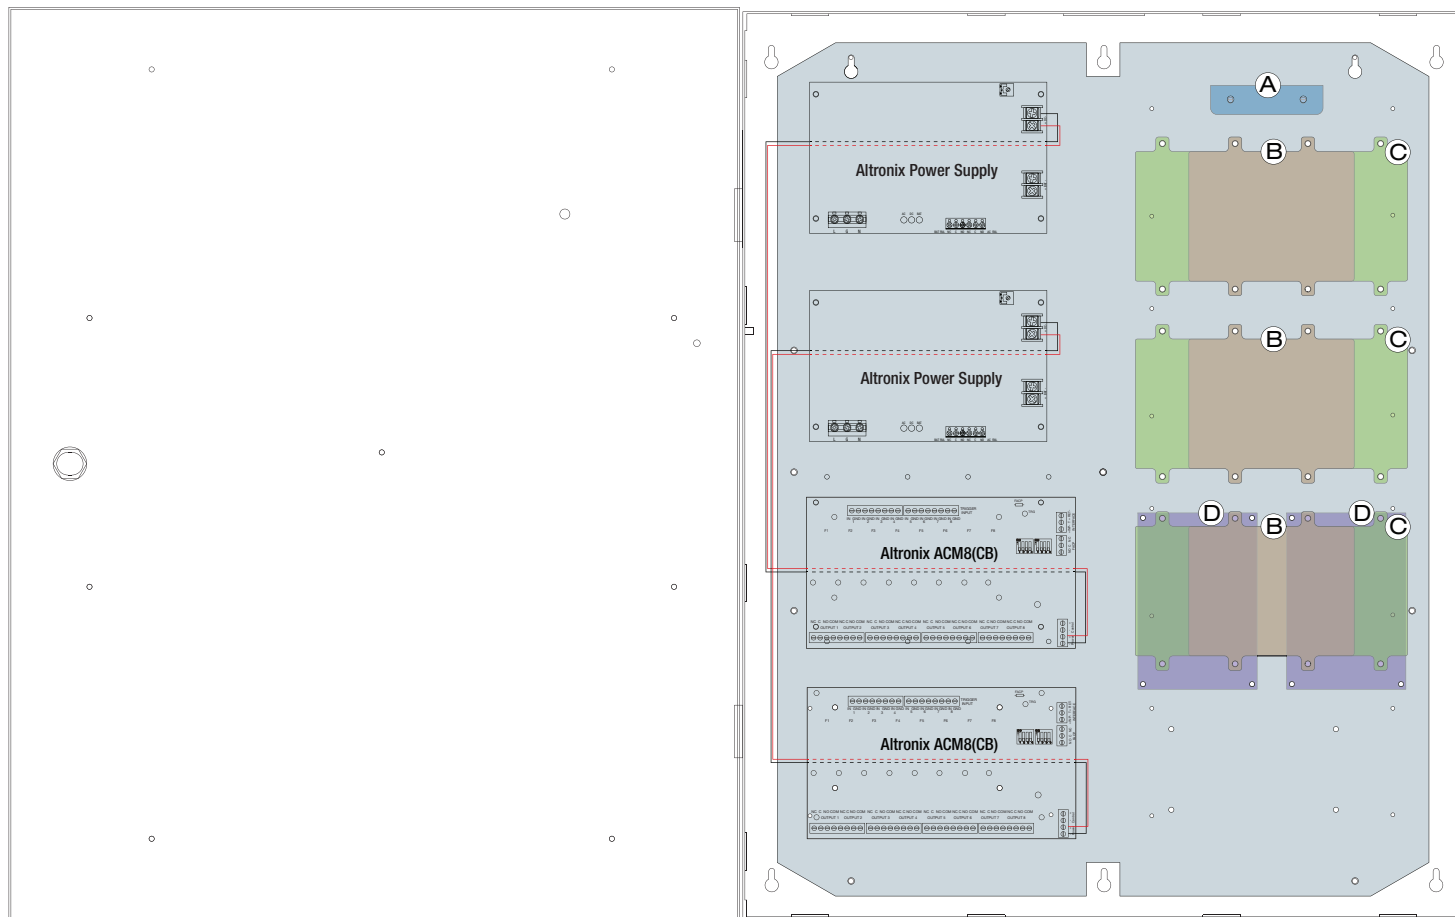

Accessories (order separately)

WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC
with
batteriesTrove2BWC
with
wires**TROVE2BWC - Battery/Wire Trough Enclosure**

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution. The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets. Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

Dimensions and Drawing

Dimensions (H x W x D approximate)

27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

