


## T3AXK77F16SDQV (Kit)

Access & Power Integration Solution for Axis Communications



Altronix T3AXK77F16SDQV kit consists of Trove3 enclosure, TV3 Axis Communications/ Altronix backplane with two (2) 24VDC @ 10A power supply/charger, two (2) eight (8) PTC protected networked dual input/output access control modules, two (2) 12VDC voltage regulators and two (2) sixteen (16) PTC protected dual input/output power distribution modules. This kit also accommodates up to eight (8) A1601 or A1610 or sixteen (16) A1210 modules for up to sixteen (16) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.

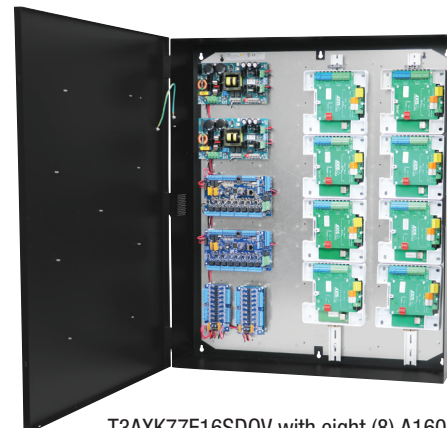

T3AXK77F16SDQV with eight (8) A1601  
DIN Rail is not included

*Axis Communications boards are not included*

### Key Features

- Two (2) 24VDC power supply/chargers
- Accommodates AXIS A1601, A1610 or A1210 modules
- Convenient knockout configuration:
  - One (1) single knockout 2.415" (2" Conduit)
  - Two (2) double knockouts 1.948" (1.5" Conduit) / 1.701" (1.25" Conduit)
  - Thirteen (13) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Supervision
  - AC Fail
  - Low Battery and Battery Presence
  - Low power shutdown
- Agency Listings:
  - CE European Conformity
- Lifetime Warranty\*

*\*Altronix Power Supply/Chargers and Sub-Assemblies only*

## Specifications

### Two (2) Power Supply/Charger (eFlow104NBV):

#### Input

Voltage	220VAC (working range 198VAC - 256VAC), 50/60Hz, 2.7A
Input Fuse	6.5A/250V

#### Outputs

Voltage	24VDC
Current	10A continuous
Auxiliary	Class 2 power-limited @ 1A (unswitched)
Other	Overvoltage protection. Filtered and regulated

#### Battery Charging

Capacity	12AH/12VDC (2 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

#### Fire Alarm Disconnect

Supervised	Latching or non-latching
EOL	10K Resistor

#### Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

#### Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units. Prevents deep battery discharge

#### Indicators (LED)

Input	220VAC is present
DC Output	Powered

### Two (2) Voltage Regulators (VR6):

#### Input

Voltage	24VDC from eFlow104NBV
---------	------------------------

#### Output

Voltage	12VDC
Current	6A continuous
Other	Surge suppression

#### Indicators (LED)

Input	24VDC is present
Output	Powered

### Two (2) Dual Input Power Distribution Modules (PDS16CB):

#### Input

Voltage	24VDC from eFlow104NBV and 12VDC from VR6
Input PTCs	9A

#### Outputs

Voltage	12VDC and/or 24VDC
Any of the sixteen power outputs are selectable to follow power Input 1 or Input 2	
Individual outputs may be set to OFF position for servicing	
Output PTCs	2.5A

#### Indicators (LED)

DC Output	Sixteen (16) individual output LEDs
Green:	12VDC
Red:	24VDC

### Two (2) Network Access Power Controllers (LINQ8ACMCB):

#### Input

Voltage	24VDC from eFlow104NBV and 12VDC from VR6
Input PTCs	9A

#### Outputs

PTC protected outputs  
Any of the eight (8) PTC protected power outputs are selectable to follow power Input 1 or Input 2  
Individual outputs may be set to OFF position for servicing  
Output PTCs: 2.5A

#### Programming Features:

##### Eight (8) Programmable Outputs:

- Fail-safe, fail-secure or auxiliary outputs
- Input controlled or manually controlled through software
- High (over) and low (under) voltage and current monitoring by output
- Multiple outputs may be programmed to be triggered by a single input
- Battery back-up by output

##### Eight (8) Programmable Trigger Inputs:

- Normally open (NO), Normally closed (NC) or Open collector sink inputs
- Wet Input (5VDC - 24VDC) with 10k resistor
- Any combination of the above

##### Other Programmable Trigger Inputs:

- Monitor power supply(ies) input for voltage and current limits (high/low)
- Input and output current calibration, Programmable timer events
- Programmable user levels, Enable or disable alerts by type
- Programmable alert reporting delay

#### Indicators (LED)

Green AC LED:	indicates AC trouble condition
Green BAT LED:	indicates battery trouble condition
Green FACP LED:	indicates FACP disconnect is triggered
Flashing Blue Heartbeat LED:	indicates network connection
Individual OUT1 - OUT8 LEDs:	indicate outputs are triggered
Individual Voltage LEDs:	indicate 12VDC (Green) or 24VDC (Red)

### T3AXK77F16SDQV Kit:

#### Agency Listings

CE	European Conformity
----	---------------------

#### Physical and Environmental

##### Dimensions (H x W x D)

Enclosure: 36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)  
Shipping: 40.75" x 35.25" x 12" (1035.1mm x 895.4mm x 304.8mm)

##### Weight (approx.)

Product	84.2 lb. (38.2 kg)
Shipping	97.5 lb. (44.22 kg)

##### Temperature

Operating	0°C to 49°C (32°F to 120°F)
Storage	- 20°C to 70°C (- 4°F to 158°F)

##### Relative Humidity


85% +/- 5%.

##### BTU/Hr (approx.):

246 BTU/Hr.

## Access Controller Position Chart for the Following Models:

Altronix/Axis Communications	Pem Mounting
Axis 1601, Axis 1610 (mounted onto DIN Rail)	(A)
Axis 1210 (mounted onto DIN Rail)	(B)

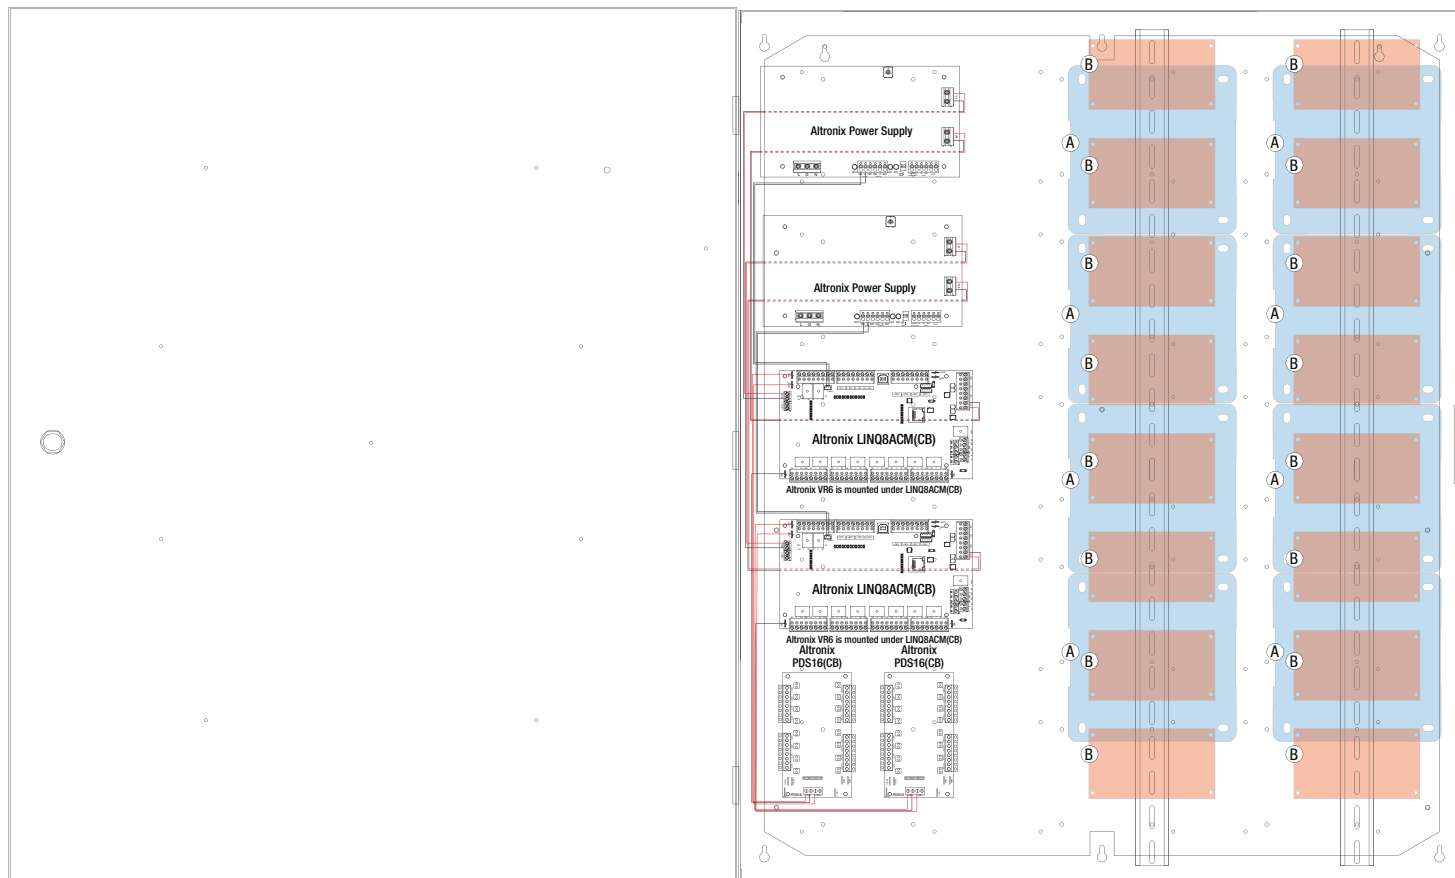

## Accessories (order separately)



WM5

### WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

### MM4, MM8, MM12, MM24 - Magnetic Mounting Solution


Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

### BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

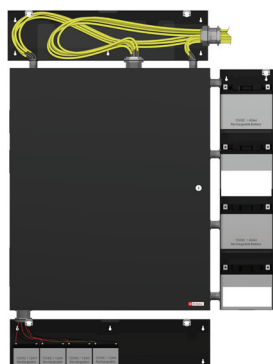

*Typical battery/wiring setup with Trove3 Enclosure (not included)*

### TROVE3BWC / TROVE3SWC - Battery/Wire Trough Enclosure

Altronix Trove3BWC and Trove3SWC are dual-purpose enclosures that can be used as wiring troughs or battery cabinets when mounted above or below (Trove3BWC) or on either side (Trove3SWC) of the Trove integrated power and access solution. The knockouts on the Trove3BWC and Trove3SWC have been strategically placed to line up with the Trove3 allowing for easy conduit connections between cabinets. Trove3BWC and Trove3SWC include cam locks and 2 tamper switches each to ensure access to wiring and batteries is secure.

## Dimensions and Drawing

Dimensions (H x W x D approximate)

36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)

