

## T1M1CK2D (Pre-wired Kit)

### Access and Power Integration Solution for Mercury



Altronix T1M1CK2D is a 2-door access and power integration kit which includes Altronix power and sub-assemblies along with factory installed wire management and wire assemblies that are pre-configured with terminal blocks for Mercury\* hardware. This unit provides ample power and dual voltage outputs to support Mercury platform controllers and locking devices. The T1M1CK2D accommodates one (1) Intelligent Controller and one (1) Dual Reader Interface Module Trove Plus simplifies field installations and provides reliable, robust critical power and control for the most demanding applications.

**\*Also compatible with these authentic Mercury partners:**

AccessNsite, Avigilon, BadgePass, BluBox, Feenics, Genetec, Identocard, IMRON, Johnson Controls, Kastle, Keri Systems, LockState, Maxxess, Midpoint Security, NLSS, Open Options, Panasonic i-PRO MonitorCast, Quintron, RS2, S2 Security, Schneider Electric, Vanderbilt



T1M1CK2D - includes  
eFlow4NB, PDS8CB, VR6, ACM4CB,  
wire harnesses and wire magnets

*Mercury modules are not included*

### Key Features

- Accommodates the following Mercury controllers:
  - 1 - LP2500 and 1 - MR52
- Convenient knockout configuration:
  - One (1) knockout - 1-1/2" Conduit
  - Nine (9) double knockouts - 3/4" Conduit and 1" Conduit
- Unit includes:
  - Removable backplane
  - Wire management
  - Custom wire assemblies for power distribution with terminal blocks for controller connections
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Supervision
  - AC Fail
  - Low Battery and Battery Presence
  - Low power shutdown
- Agency Listings:
  - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
  - UL: UL294 - Access Control System
  - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
  - CE European Conformity
- Enclosure accommodates up to two (2) 12VDC/7AH batteries
- Lifetime Warranty\*

*\*Altronix Power Supply/Chargers and Sub-Assemblies only*

## Specifications

### Power Supply (eFlow4NB):

#### Input

Voltage	120VAC, 60Hz, 3.5A
Input Fuse	5A/250V

#### Output

Voltage	24VDC
Current	4A continuous
Other	Overvoltage protection. Filtered and regulated

### Battery Charging

Capacity	7AH/12VDC (2 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

### Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

### Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units (depending on the power supply)  
Prevents deep battery discharge

### Indicators (LED)

Input	120VAC is present
DC Output	Powered
Battery	Discharged or not connected

### Dual Input Power Distribution Module (PDS8CB)

#### Input

Voltage	24VDC from eFlow4NB and 12VDC from VR6
Input PTCs	9A

#### Outputs

Voltage	12VDC and/or 24VDC
Any of the eight (8) power outputs are selectable to follow power Input 1 or Input 2	
Individual outputs may be set to OFF position for servicing	
Output PTCs	2.5A

### Indicators (LED)

DC Output	Eight (8) individual output LEDs
Green:	12VDC
Red:	24VDC

### Voltage Regulator (VR6):

#### Input

Voltage	24VDC from eFlow4NB
---------	---------------------

#### Output

Voltage	12VDC
Current	6A continuous
Other	Surge suppression

### Indicators (LED)

Input	24VDC is present
Output	Powered

### Access Power Controller (ACM4CB):

#### Input

Voltage	24VDC from eFlow4NB
Input PTC	9A

#### Outputs

Voltage	24VDC
Four (4) independently controlled PTC outputs:	
a) Fail-Safe and/or Fail-Secure power outputs	
Form "C" Relays rated 28VAC or VDC @ 2.5A	
b) Auxiliary power outputs (unswitched)	
c) Any combination of the above	

Output PTCs	2.5A
-------------	------

### Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

### T1M1CK2D Kit:

#### Agency Listings

All components of this Trove kit are UL Listed sub-assemblies  
Please refer to the corresponding Sub-Assembly Installation Guides for further information

CE European Conformity

### Physical and Environmental

#### Dimensions (H x W x D)

Enclosure:	18" x 14.5" x 4.62" (457.2mm x 368.3mm x 118.0mm)
Shipping:	21.75" x 18.25" x 5.75" (552.5mm x 463.6mm x 146.1mm)

#### Weight (approx.)


Product	18.0 lb. (8.17 kg)
Shipping	22.0 lb. (9.98 kg)

#### Temperature


Operating	0°C to 49°C (32°F to 120°F)
Storage	-20°C to 70°C (-4°F to 158°F)

Relative Humidity 85% +/- 5%

BTU/Hr (approx.): 90 BTU/Hr.

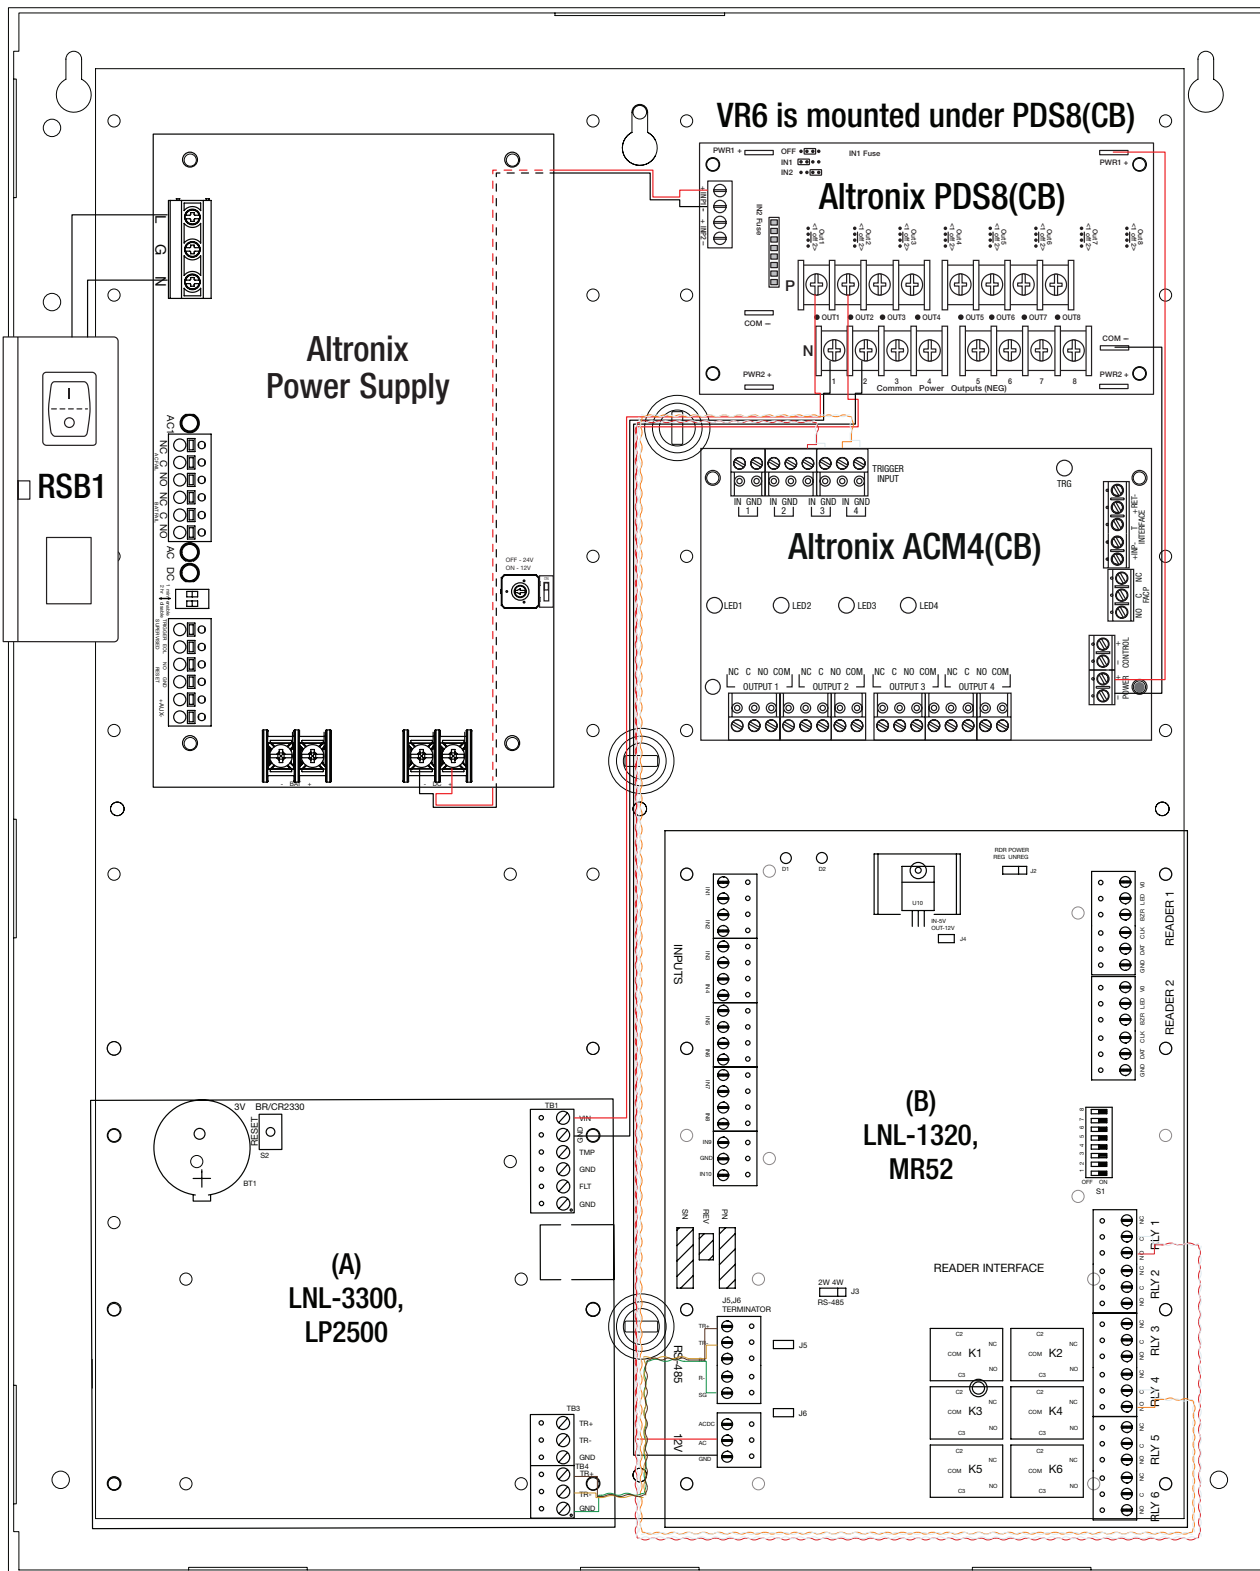

**Accessories** (order separately) —



LINQ2

**LINQ2 - Network Supervision**

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email



WM5

**WM5, WM25, WM100 - Magnetic Cable Tie Mounts**

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

**MM4, MM8, MM12, MM24 - Magnetic Mounting Solution**

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.

## Dimensions and Drawing

Dimensions (H x W x D approximate)

18.0" x 14.5" x 4.625" (457.2mm x 368.3mm x 117.5mm)

