

T1M1CK2DV (Pre-wired Kit)

Access and Power Integration Solution for Mercury



Altronix T1M1CK2DV is a 2-door access and power integration kit which includes Altronix power and sub-assemblies along with factory installed wire management and wire assemblies that are pre-configured with terminal blocks for Mercury* hardware. This unit provides ample power and dual voltage outputs to support Mercury platform controllers and locking devices. The T1M1CK2DV accommodates one (1) Intelligent Controller and one (1) Dual Reader Interface Module. Trove Plus simplifies field installations and provides reliable, robust critical power and control for the most demanding applications.

*Also compatible with these authentic Mercury partners:

AccessNsite, Avigilon, BadgePass, BluBox, Feenics, Genetec, Identicon, IMRON, Johnson Controls, Kastle, Keri Systems, LockState, Maxxess, Midpoint Security, NLSS, Open Options, Panasonic i-PRO MonitorCast, Quintrion, RS2, S2 Security, Schneider Electric, Vanderbilt



T1M1CK2DV - includes
eFlow4NBV, PDS8CB, VR6, ACM4CB,
wire harnesses and wire magnets

Mercury modules are not included

Key Features

- Accommodates the following Mercury controllers:
1 - LP2500 and 1 - MR52
- Convenient knockout configuration:
- One (1) knockout - 1-1/2" Conduit
- Nine (9) double knockouts - 3/4" Conduit and 1" Conduit
- Unit includes:
- Removable backplane
- Wire management
- Custom wire assemblies for power distribution with terminal blocks for controller connections
- Supervision
- AC Fail
- Low Battery and Battery Presence
- Low power shutdown
- CE European Conformity
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to two (2) 12VDC/7AH batteries
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Accessories (order separately)



LINQ2

LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/accessories in any metal enclosure or backplane.

Specifications

Power Supply (eFlow4NBV):

Input

Voltage 220VAC (working range 198VAC - 256VAC),
50/60Hz, 2.1A

Input Fuse 5A/250V

Output

Voltage 24VDC

Current 4A continuous

Other Overvoltage protection. Filtered and regulated

Battery Charging

Capacity 7AH/12VDC (2 within enclosure)
40AH/65AH (requires separate enclosure)

Type Sealed lead acid or gel type

Failover Upon AC loss, instantaneous

Batteries are sold separately

Supervision

AC Failure Form "C" contacts

Battery Form "C" contacts

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below
70-75% for 24V units (depending on the power supply)

Prevents deep battery discharge

Indicators (LED)

Input 220VAC is present

DC Output Powered

Battery Discharged or not connected

Dual Input Power Distribution Module (PDS8CB)

Input

Voltage 24VDC from eFlow4NBV and 12VDC from VR6

Input PTCs 9A

Outputs

Voltage 12VDC and/or 24VDC

Any of the eight (8) power outputs are selectable

to follow power Input 1 or Input 2

Individual outputs may be set to OFF position for servicing

Output PTCs 2.5A

Indicators (LED)

DC Output Eight (8) individual output LEDs

Green: 12VDC

Red: 24VDC

Voltage Regulator (VR6):

Input

Voltage 24VDC from eFlow4NBV

Output

Voltage 12VDC

Current 6A continuous

Other Surge suppression

Indicators (LED)

Input 24VDC is present

Output Powered

Access Power Controller (ACM4CB):

Input

Voltage 24VDC from eFlow4NBV

Input PTC 9A

Outputs

Voltage 24VDC

Four (4) independently controlled PTC outputs:

a) Fail-Safe and/or Fail-Secure power outputs

Form "C" Relays rated 28VAC or VDC @ 2.5A

b) Auxiliary power outputs (unswitched)

c) Any combination of the above

Output PTCs 2.5A

Indicators (LED)

Red LEDs Outputs are triggered (relays energized)

Green LED FACP disconnect is triggered

T1M1CK2DV Kit:

Agency Listings

CE European Conformity

Physical and Environmental

Dimensions (H x W x D)

Enclosure:

18" x 14.5" x 4.62" (457.2mm x 368.3mm x 118.0mm)

Shipping:

21.75" x 18.25" x 5.75" (552.5mm x 463.6mm x 146.1mm)

Weight (approx.)

Product 18.0 lb. (8.17 kg)

Shipping 22.0 lb. (9.98 kg)



Temperature

Operating 0°C to 49°C (32°F to 120°F)

Storage - 20°C to 70°C (- 4°F to 158°F)

Relative Humidity 85% +/- 5%

BTU/Hr. (approx.): 90 BTU/Hr.

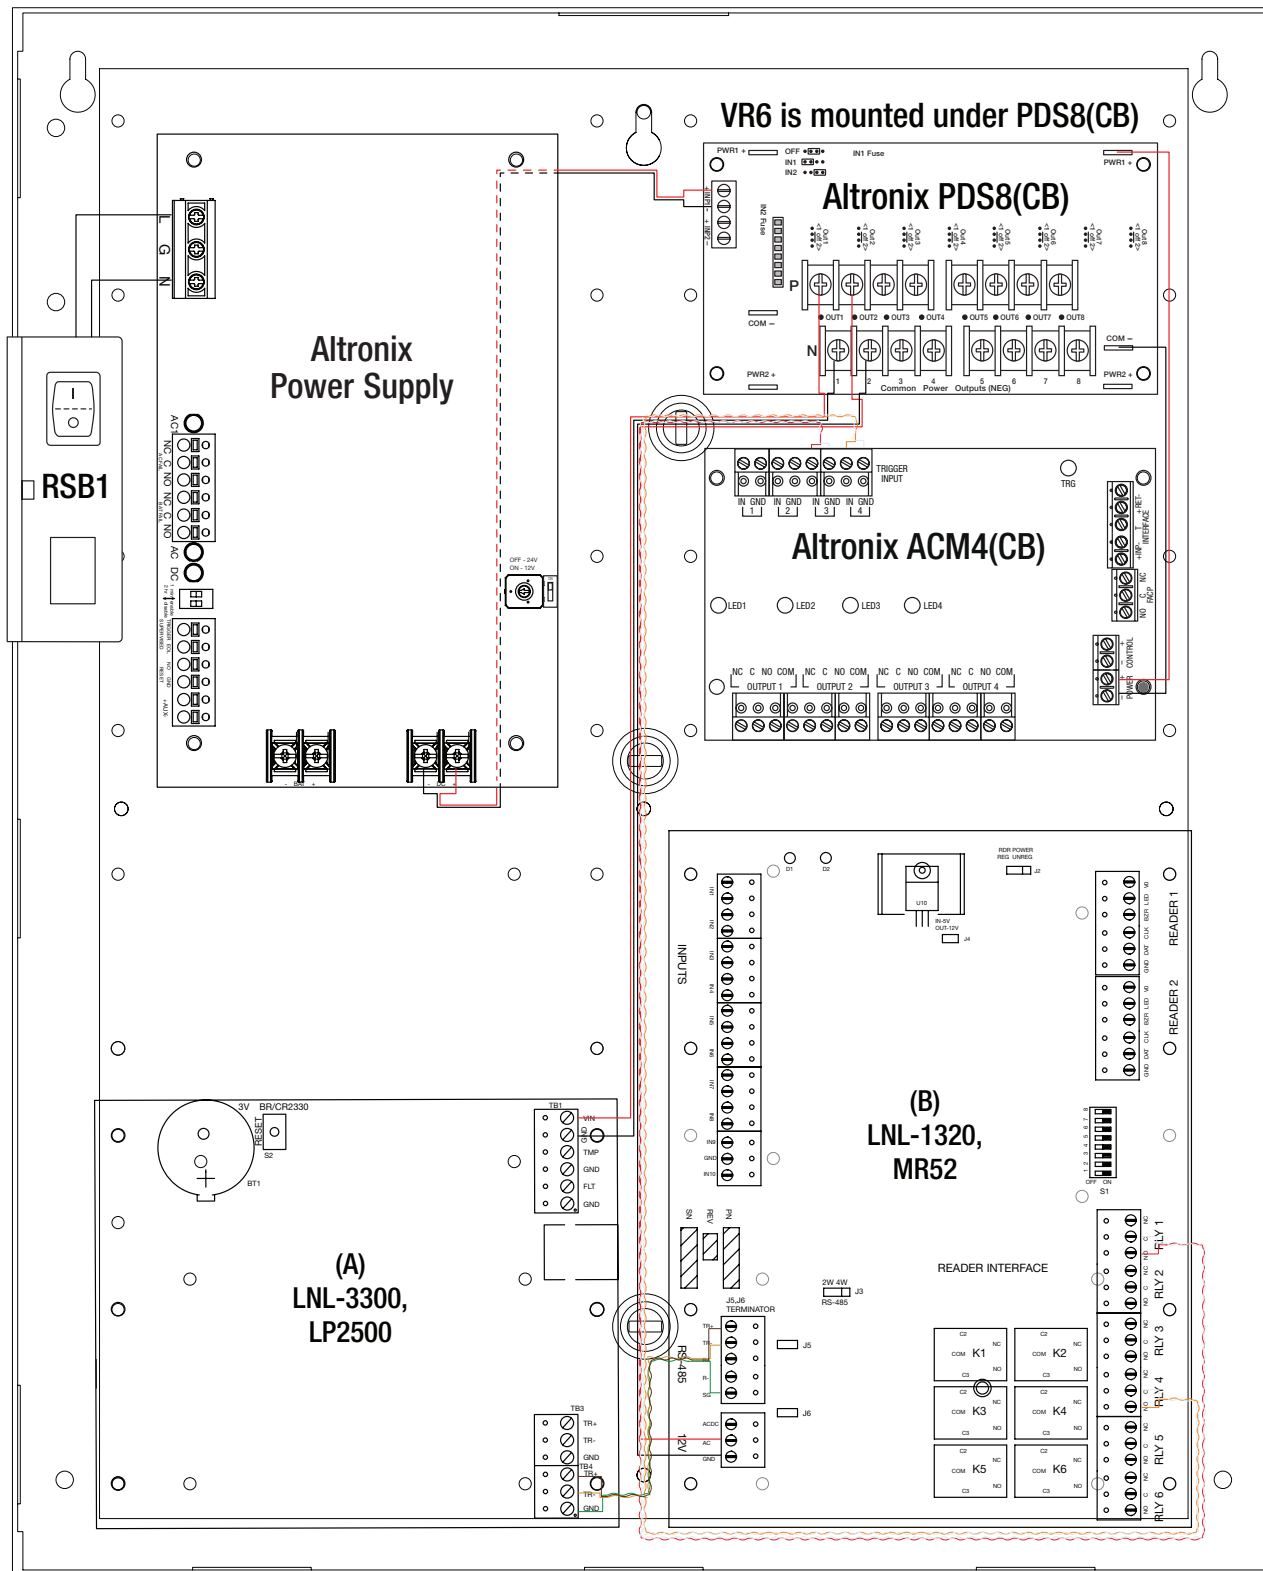

Dimensions and Drawing

Dimensions (H x W x D approximate)

18.0" x 14.5" x 4.625" (457.2mm x 368.3mm x 117.5mm)

