

## T3MK75F16 (Kit)


Access & Power Integration Solution for Mercury

# TROVE™

Altronix T3MK75F16 kit consists of Trove3 enclosure and TM3 Altronix & Mercury backplane with 24VDC @ 10A and 12VDC @ 10A power supply/chargers, eight (8) fuse protected output power distribution module and two eight (8) fuse protected output access control modules. This kit also accommodates various combinations of Mercury\* boards for up to sixteen (16) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.

**\*Also compatible with these authentic Mercury partners:**

AccessNsite, Avigilon, BadgePass, BluBox, Feenics, Genetec, Identocard, IMRON, Johnson Controls, Kastle, Keri Systems, Lenel/S2, LockState, Maxxess, Midpoint Security, NLSS, Open Options, Panasonic Video Insight, Quintron, RS2, Schneider Electric, Vanderbilt

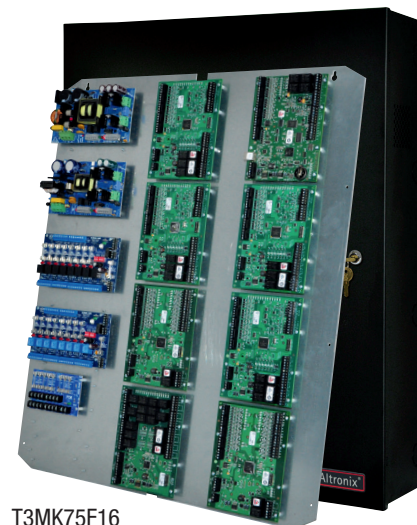

T3MK75F16

*Mercury boards are not included*

### Key Features

- 24VDC and 12VDC power supply/chargers
- Accommodates the following Mercury controllers:  
Mercury: LP1501, LP1502, LP2500, LP4502, MR16IN, MR16OUT, MR50, MR52, MR62e, MUX8
- Convenient knockout configuration:
  - One (1) single knockout 2.415" (2" Conduit)
  - One (1) double knockout 1.948" (1.5" Conduit) / 1.701" (1.25" Conduit)
  - Sixteen (16) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Supervision
  - AC Fail
  - Low Battery and Battery Presence
  - Low power shutdown
- Agency Listings:
  - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
    - UL: UL294 - Access Control System
    - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
    - CE European Conformity
- Lifetime Warranty\*

*\*Altronix Power Supply/Chargers and Sub-Assemblies only*

**Specifications****Power Supply/Charger 1 (eFlow104NB):****Input**

Voltage	120VAC, 60Hz, 4.5A
Input Fuse	6.3A/250V

**Output**

Voltage	24VDC @ 10A.
Auxiliary	1A (unswitched)
Protection	Overvoltage protection. Filtered and regulated

**Power Supply/Charger 2 (eFlow102NB):****Input**

Voltage	120VAC, 60Hz, 3.5A
Input Fuse	5A/250V

**Output**

Voltage	12VDC @ 10A
Auxiliary	1A (unswitched).
Protection	Overvoltage protection. Filtered and regulated

**Both Power Supplies:****Battery Charging**

Capacity	12VDC/12AH (2 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

**Fire Alarm Disconnect**

Supervised	Latching or non-latching
EOL	10K Resistor

**Supervision**

AC Failure	Form "C" contacts
Battery	Form "C" contacts

**Low DC Power Shutdown**

Shuts down DC output terminals if battery voltage drops below 71-73% for 12V units and 70-75% for 24V units (depending on the power supply). Prevents deep battery discharge

**Indicators (LED)**

AC Input	120VAC is present
DC Output	Powered
Battery	Discharged or not connected

**Power Distribution Module (PD8UL):****Input**

Voltage	12VDC from eFlow102NB
---------	-----------------------

**Outputs**

Voltage	12VDC
Fuses	3.5A/250V

**Indicators (LED)**

Green LED	DC Output
-----------	-----------

**Two (2) Access Power Controllers (ACM8):****Input**

Voltage	24VDC from eFlow104NB
Input Fuse	10A/250V

**Outputs**

Voltage	24VDC
Eight (8) 24VDC independently controlled fused outputs:	
a) Fail-Safe and/or Fail-Secure power outputs	
Form "C" Relays rated 28VAC or VDC @ 2.5A	
b) Auxiliary power outputs (unswitched)	
c) Any combination of the above	

Output Fuses	3.5A/250V
--------------	-----------

**Indicators (LED)**

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

**T3MK75F16 Kit:****Agency Listings**

All components of this Trove kit are UL Listed sub-assemblies. Please refer to the corresponding Sub-Assembly Installation Guides for further information

CE	European Conformity
----	---------------------

**Physical and Environmental****Dimensions (H x W x D)**

Enclosure:	36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)
Shipping:	40.75" x 35.25" x 12" (1035.1mm x 895.4mm x 304.8mm)

**Weight (approx.)**

Product	84.2 lb. (38.2 kg)
Shipping	97.5 lb. (44.22 kg)

**Temperature**


Operating	0°C to 49°C (32°F to 120°F)
Storage	-20°C to 70°C (-4°F to 158°F)


Relative Humidity	85% +/- 5%
-------------------	------------

BTU/Hr (approx.):	217 BTU/Hr.
-------------------	-------------

**Access Controller Position Chart for the Following Models:**

Altronix/Mercury	Pem Mounting
LP2500, MUX8	(A)
LP1502, LP4502, MR52, MR16IN, MR16OUT	(B)
LP1501, MR62e	(C)
MR50	(D)

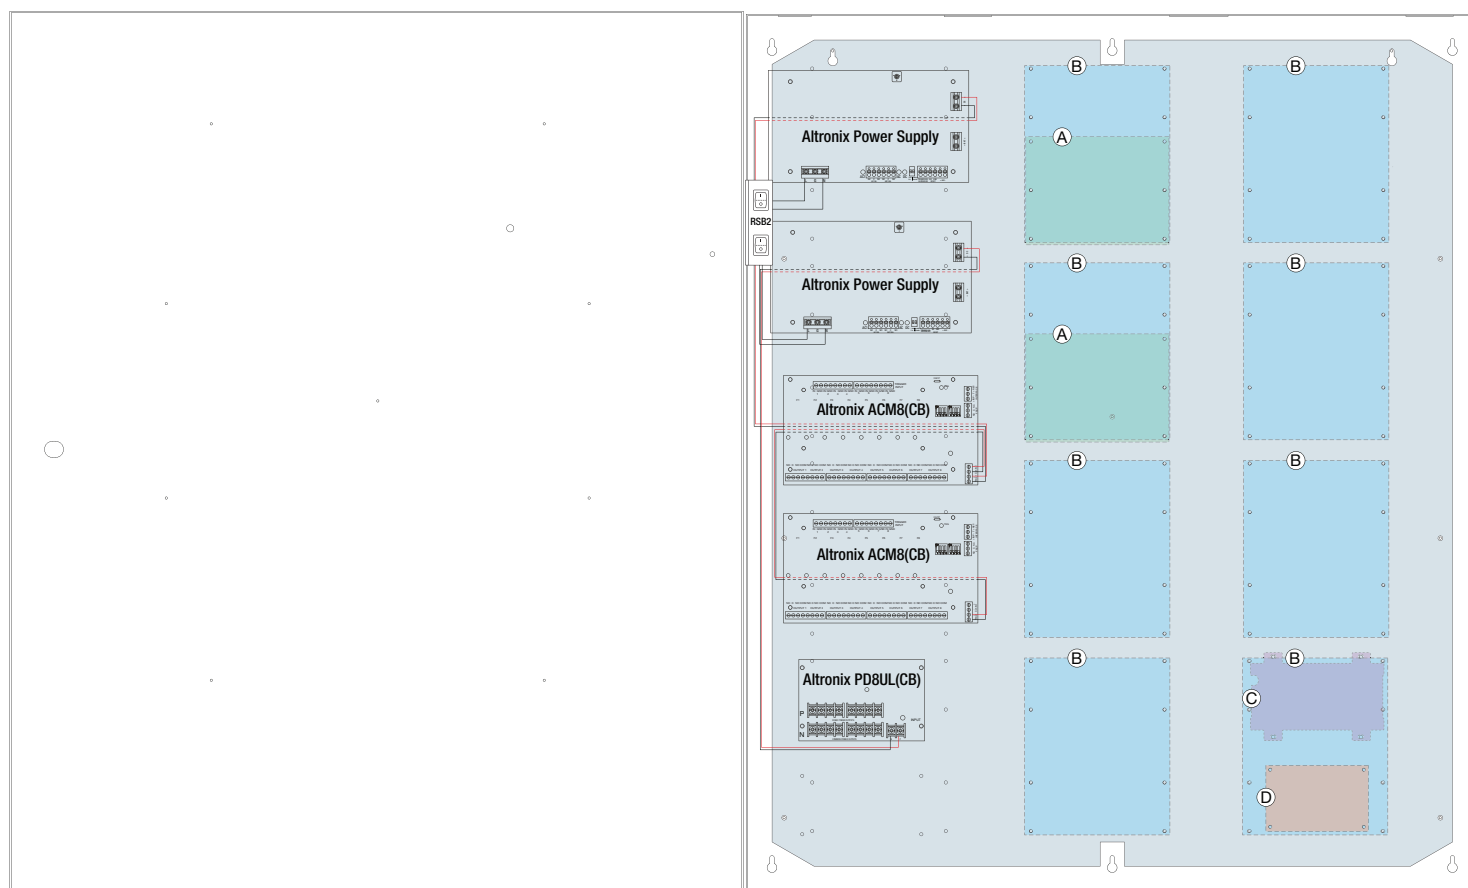

**Accessories** (order separately)

LINQ2

**LINQ2 - Network Supervision**

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email



WM5

**WM5, WM25, WM100 - Magnetic Cable Tie Mounts**

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

**MM4, MM8, MM12, MM24 - Magnetic Mounting Solution**


Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

**BR1 - Sub-Assembly Mounting Bracket**

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

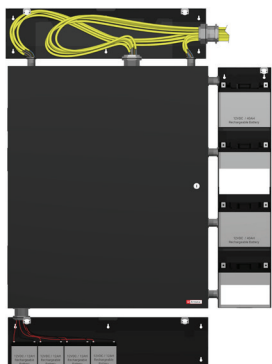**TROVE3BWC / TROVE3SWC - Battery/Wire Trough Enclosure**

Altronix Trove3BWC and Trove3SWC are dual-purpose enclosures that can be used as wiring troughs or battery cabinets when mounted above or below (Trove3BWC) or on either side (Trove3SWC) of the Trove integrated power and access solution. The knockouts on the Trove3BWC and Trove3SWC have been strategically placed to line up with the Trove3 allowing for easy conduit connections between cabinets. Trove3BWC and Trove3SWC include cam locks and 2 tamper switches each to ensure access to wiring and batteries is secure.

*Typical battery/wiring setup with Trove3 Enclosure (not included)*

## Dimensions and Drawing

Dimensions (H x W x D approximate)

36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)

