

## T1VK34D (Kit)

Access & Power Integration Solution for HID Aero/VertX

**TROVE™**

Altronix T1VK34D kit consists of Trove1 enclosure, TV1 HID Aero/VertX/Altronix backplane with one (1) 12 or 24VDC @ 6A power supply/charger, one (1) PTC access power controller, one (1) voltage regulator and one (1) dual input PTC power distribution module. This kit also accommodates up to two (2) HID Aero/VertX modules for up to four (4) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.



T1VK34D

*HID Aero/VertX modules are not included*

### Key Features

- 12 or 24VDC power supply/charger
- Accommodates up to two (2) VertX® V100, V200, V300, V1000, V2000 or Aero X100, X200, X300, X1100 modules
- Convenient knockout configuration:
  - One (1) double knockout  
1.948" (1-1/2" Conduit) / 1.701" (1-1/4" Conduit)
  - Nine (9) double knockouts  
1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to two (2) 12VDC/7AH batteries
- Supervision
  - AC Fail
  - Battery Fail and Battery Presence
- Agency Listings:  
All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
  - UL: UL294 - Access Control System
  - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
  - CE European Conformity
- Lifetime Warranty\*

*\*Altronix Power Supply/Chargers and Sub-Assemblies only*

### Accessories (order separately)



WM5

#### WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

#### MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.

## Specifications

### Power Supply/Charger (AL600ULXB):

#### Input

Voltage	115VAC, 60Hz, 3.5A max.
Input Fuse	5A/250V

#### Output

Voltage	12VDC or 24VDC selectable
Current	6A @ 12VDC or 24VDC continuous max.
Other	Overvoltage protection Filtered and regulated

### Battery Charging

Capacity	7AH/12VDC (2 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

### Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

### Indicators (LED)

Input	115VAC is present
DC Output	Powered
Battery	Discharged or not connected

### Access Power Controller (ACM4CB):

#### Input

Voltage	24VDC from AL600ULXB
Input PTC	9A

#### Outputs

Voltage	24VDC
Four (4) independently controlled PTC outputs:	
a) Fail-Safe and/or Fail-Secure power outputs	
Form "C" Relays rated 28VAC or VDC @ 2.5A	
b) Auxiliary power outputs (unswitched)	
c) Any combination of the above	

Output PTCs	2.5A
-------------	------

### Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

### Voltage Regulator (VR6):

#### Input

Voltage	24VDC from AL600ULXB
---------	----------------------

#### Output

Voltage	12VDC
Current	6A continuous
Other	Surge suppression

### Indicators (LED)

Input	24VDC is present
Output	Powered

### Dual Input Power Distribution Module (PDS8CB):

#### Input

Voltage	24VDC from AL600ULXB and 12VDC from VR6
Input PTCs	9A

#### Outputs

Voltage	12VDC and/or 24VDC
Any of the eight (8) power outputs are selectable to follow power Input 1 or Input 2	
Individual outputs may be set to OFF position for servicing	
Output PTCs	2.5A

### Indicators (LED)

DC Output	Eight (8) individual output LEDs
Green:	12VDC
Red:	24VDC

### T1VK34D Kit:

#### Agency Listings

All components of this Trove kit are UL Listed sub-assemblies. Please refer to the corresponding Sub-Assembly Installation Guides for further information.

CE European Conformity

### Physical and Environmental:

#### Dimensions (H x W x D)

Enclosure:	18" x 14.5" x 4.62" (457.2mm x 368.3mm x 118.0mm)
Shipping:	21.75" x 18.25" x 5.75" (552.5mm x 463.6mm x 146.1mm)

#### Weight (approx.)

Product:	15.5 lb. (7.0 kg)
Shipping:	19.5 lb. (8.9 kg)


#### Temperature

Operating	0°C to 49°C (32°F to 120°F)
Storage	-20°C to 70°C (-4°F to 158°F)

Relative Humidity	85% +/- 5%
BTU/Hr. (approx.):	87 BTU/Hr.

**Access Controller Position Chart for the Following Models:**

HID Aero/VertX	Pem Mounting
V100, V200, V300, V1000, V2000, X100, X200, X300, X1100	(A)

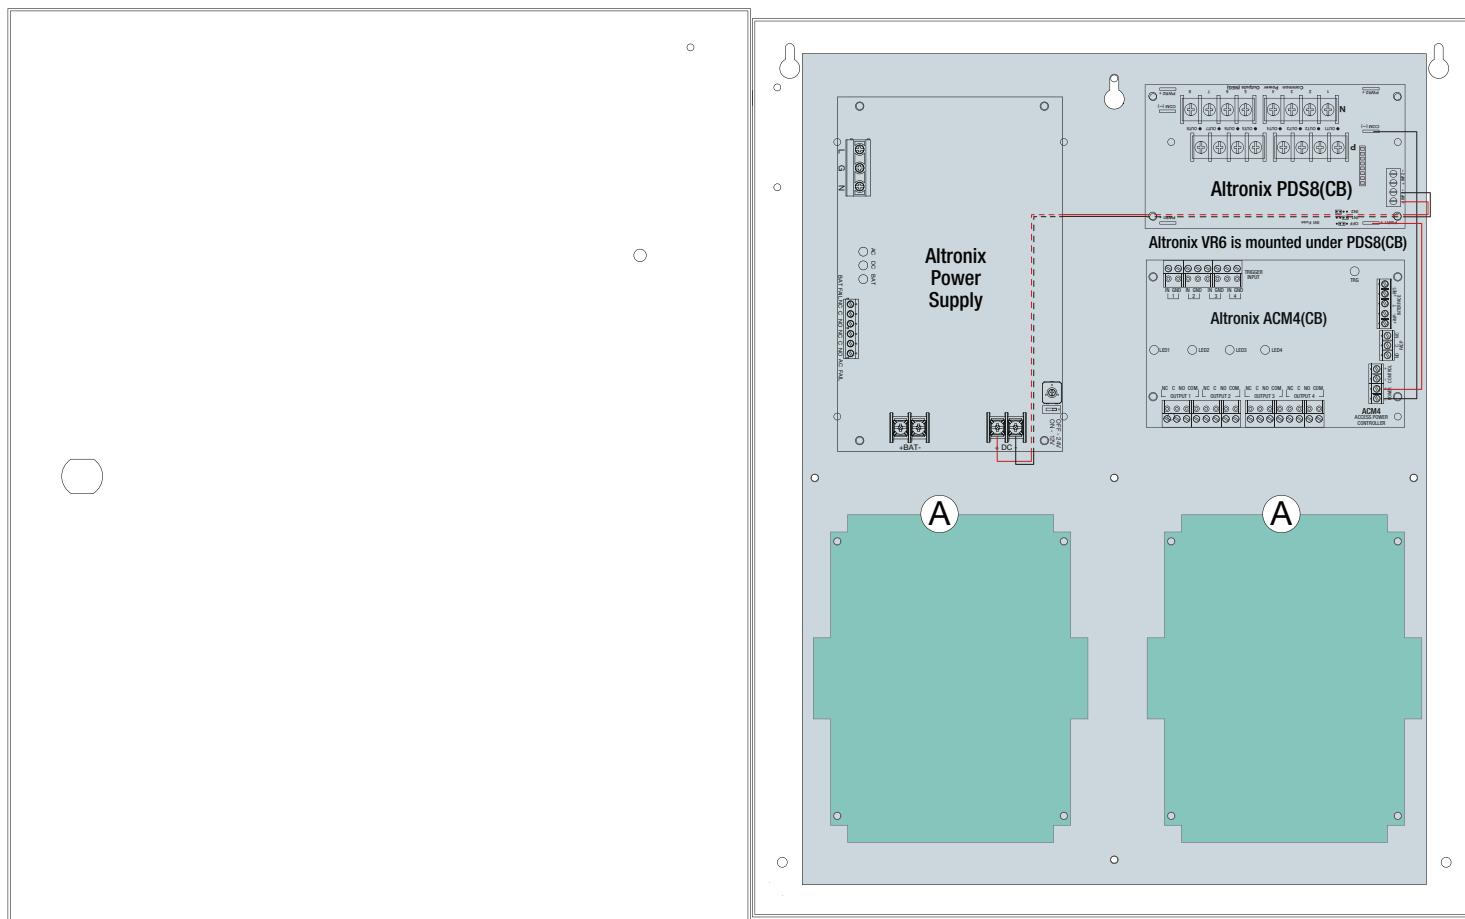

## Dimensions and Drawing

Dimensions (H x W x D approximate)

18.0" x 14.5" x 4.625" (457.2mm x 368.3mm x 118mm)

