

## T2KHK312D (Kit)

### Access & Power Integration Solution for Kantech

Altronix T2KHK312D kit consists of Trove2 enclosure, TKH2 Kantech/Altronix backplane with one (1) 12VDC or 24VDC @ 6A power supply/charger, one (1) eight (8) output PTC access power controller, one (1) four (4) output PTC access power controller and one (1) 16VAC/18VAC transformer.

This kit also accommodate various combinations of Kantech boards for up to twelve (12) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.

# KANTECH

# TROVE™



T2KHK312D

*Kantech boards are not included*

### Key Features

- 24VDC power supply/charger
- Accommodates the following Kantech boards:
  - Up to two (2) KT1
  - Up to three (3) KT400
  - Up to four (4) KT-MOD-INP16 or KT-MOD-OUTP16
- Convenient knockout configuration:
  - One (1) single knockout 2.415" (2" Conduit)
  - Sixteen (16) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Supervision
  - AC Fail
  - Battery Fail and Battery Presence
- Agency Listings:
  - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
    - UL: UL294 - Access Control System
    - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
  - CE European Conformity
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Lifetime Warranty\*

*\*Altronix Power Supply/Chargers and Sub-Assemblies only*

## Specifications

### Power Supply/Charger (AL600ULXB):

#### Input

Voltage	115VAC, 60Hz, 3.5A max.
Input Fuse	5A/250V

#### Outputs

Voltage	12VDC or 24VDC selectable.
Current	6A @ 12VDC or 24VDC continuous max.
Other	Filtered and regulated

### Battery Charging

Capacity	12AH/12VDC (2 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

### Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

### Indicators (LED)

Input	115VAC is present
DC Output	Powered
Battery	Discharged or not connected

### Transformer (T1618300K):

#### Input

Voltage	115VAC, 50/60Hz, 2.7A
---------	-----------------------

#### Output

Voltage	16VAC/300VA (18.7A) or 18VAC/300VA (16.7A)
---------	---

### Access Power Controller (ACM4CB):

#### Input

Voltage	24VDC from AL600ULXB
Input PTC	9A

#### Outputs

Voltage	24VDC
Four (4) independently controlled PTC outputs:	
a) Fail-Safe and/or Fail-Secure power outputs	
Form "C" Relays rated 28VAC or VDC @ 2.5A	
b) Auxiliary power outputs (unswitched)	
c) Any combination of the above	

Output PTCs	2.5A
-------------	------

### Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

### Access Power Controller (ACM8CB):

#### Input

Voltage	24VDC from AL600ULXB
Input Fuse	10A/250V

#### Outputs

Voltage	24VDC
Eight (8) independently controlled PTC outputs:	
a) Fail-Safe and/or Fail-Secure power outputs	
Form "C" Relays rated 28VAC or VDC @ 2.5A	
b) Auxiliary power outputs (unswitched)	
c) Any combination of the above	

Output PTCs	2.5A
-------------	------

### Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

### T2KHK312D Kit:

#### Agency Listings

All components of this Trove kit are UL Listed sub-assemblies. Please refer to the corresponding Sub-Assembly Installation Guides for further information.

CE	European Conformity
----	---------------------

### Physical and Environmental

#### Dimensions (H x W x D)

Enclosure:	27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm).
Shipping:	32.5" x 26.5" x 11.125" (826mm x 673mm x 283mm)

#### Weight (approx.)

Product	61.7 lb. (28 kg)
Shipping	66.7 lb. (30.25 kg)

#### Temperature


Operating	0°C to 49°C (32°F to 120°F)
Storage	-20°C to 70°C (-4°F to 158°F)

Relative Humidity	85% +/- 5%
-------------------	------------

BTU/Hr (approx.):	232 BTU/Hr.
-------------------	-------------

## Access Controller Position Chart for the Following Models:

Kantech	Pem Mounting
KT-400	(A)
KT-1	(B)
KT-MOD-IN16, KT-MOD-OUT16	(C)

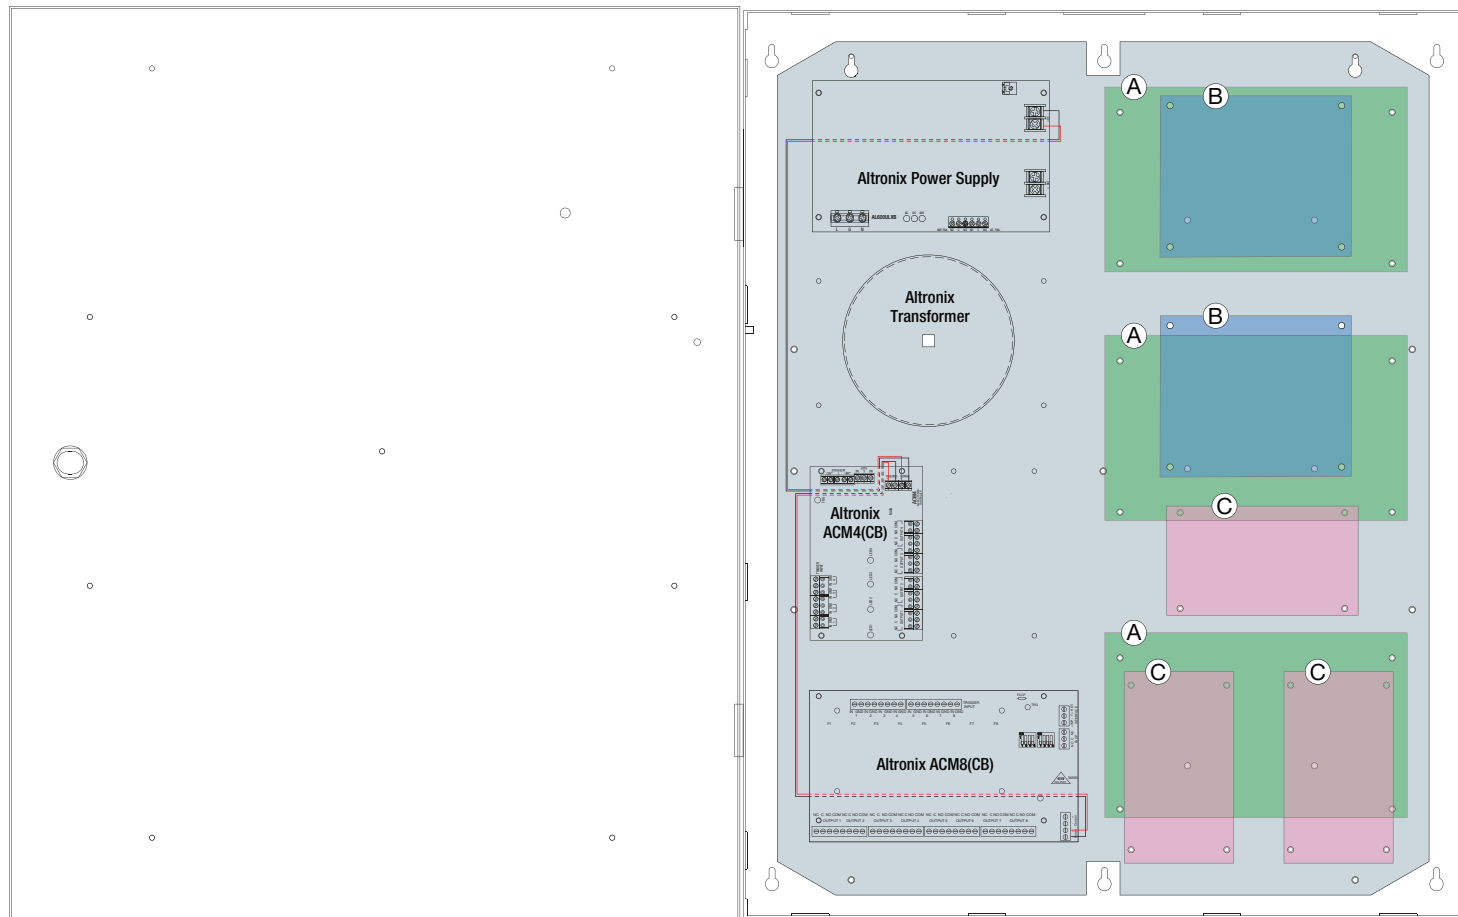

## Accessories (order separately)



WM5

### WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

### MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

### BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.



Trove2BWC  
with  
batteries



Trove2BWC  
with  
wires

### TROVE2BWC - Battery/Wire Trough Enclosure

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution. The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets. Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

## Dimensions and Drawing

Dimensions (H x W x D approximate)

27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

