

T2CVK710 (Kit)

Access & Power Integration Solution for CDVI

Altronix T2CVK710 kit consists of Trove2 enclosure, TCV2 CDVI/Altronix backplane with one (1) 24VDC @ 10A power supply/charger, one (1) 8-output fused access power controller, one (1) 4-output fused access power controller and one (1) 8-output fused power distribution module. This kit also accommodates various combinations of CDVI Atrium A22K/A22NB/ADH10 boards for up to ten (10) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.

**TROVE™**

T2CVK710

*CDVI modules are not included***Key Features**

- 24VDC power supply/charger
- Accommodates up to five (5) CDVI Atrium A22K/A22NB/ADH10 modules
- Convenient knockout configuration:
 - Single 2" diameter knockout located top center of enclosure
 - Sixteen (16) double knockouts (1" and 0.75")
- Supervision
 - AC Fail
 - Battery Fail and Battery Presence
- Agency Listings:
 - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
 - UL: UL294 - Access Control System
 - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
 - CE European Conformity
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Specifications**Power Supply/Charger (AL1024ULXB2):****Input**

Voltage	115VAC 60Hz, 4.2A max
Input Fuse	5A/250V

Outputs

Voltage	24VDC
Current	10A @ 24VDC continuous max
Other	Overvoltage protection Filtered and regulated

Battery Charging

Capacity	12AH/12VDC (2 within enclosure) 40AH/65AH (requires separate enclosure)
----------	--

Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Indicators (LED)

Input	115VAC is present
DC Output	Powered
Battery	Discharged or not connected

Access Power Controller (ACM8):**Input**

Voltage	24VDC from AL1024ULXB2
Input Fuse	10A/250V

Outputs

Voltage	24VDC
Eight (8) independently controlled fused outputs:	
a) Fail-Safe and/or Fail-Secure power outputs	
Form "C" Relays rated 28VAC or VDC @ 2.5A	
b) Auxiliary power outputs (unswitched)	
c) Any combination of the above	

Output Fuses	3.5A/250V
--------------	-----------

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

Access Power Controller (ACM4):**Input**

Voltage	24VDC from AL1024ULXB2
Input Fuse	10A/32V

Outputs

Voltage	24VDC
Four (4) independently controlled fused outputs:	
a) Fail-Safe and/or Fail-Secure power outputs	
Form "C" Relays rated 28VAC or VDC @ 2.5A	
b) Auxiliary power outputs (unswitched)	
c) Any combination of the above	

Output Fuses	3A/32V
--------------	--------

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

Power Distribution Module (PD8UL):**Input**

Voltage	24VDC from AL1024ULXB2
---------	------------------------

Outputs

Voltage	24VDC
Eight (8) fuse protected outputs	
3.5A per output max.	
Output Fuses	3.5A/250V

Indicators (LED)

Green LED	DC Output
-----------	-----------

T2CVK710 Kit:**Agency Listings**

All components of this Trove kit are UL Listed sub-assemblies. Please refer to the corresponding Sub-Assembly Installation Guides for further information

CE European Conformity

Physical and Environmental**Dimensions (H x W x D)**

Enclosure:	27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)
Shipping:	32.5" x 26.5" x 11.125" (825.5mm x 673.1mm x 282.6mm)

Weight (approx.)

Product	54.7 lb. (24.8 kg)
Shipping	59.7 lb. (27.1 kg)

Temperature

Operating	0°C to 49°C (32°F to 120°F)
Storage	- 20°C to 70°C (- 4°F to 158°F)


Relative Humidity

85% +/- 5%

BTU/Hr (approx.): 131 BTU/Hr.

Access Controller Position Chart for the Following Models:

CDVI	Pem Mounting
A22K1NB, A22NB, ADH10	(A)

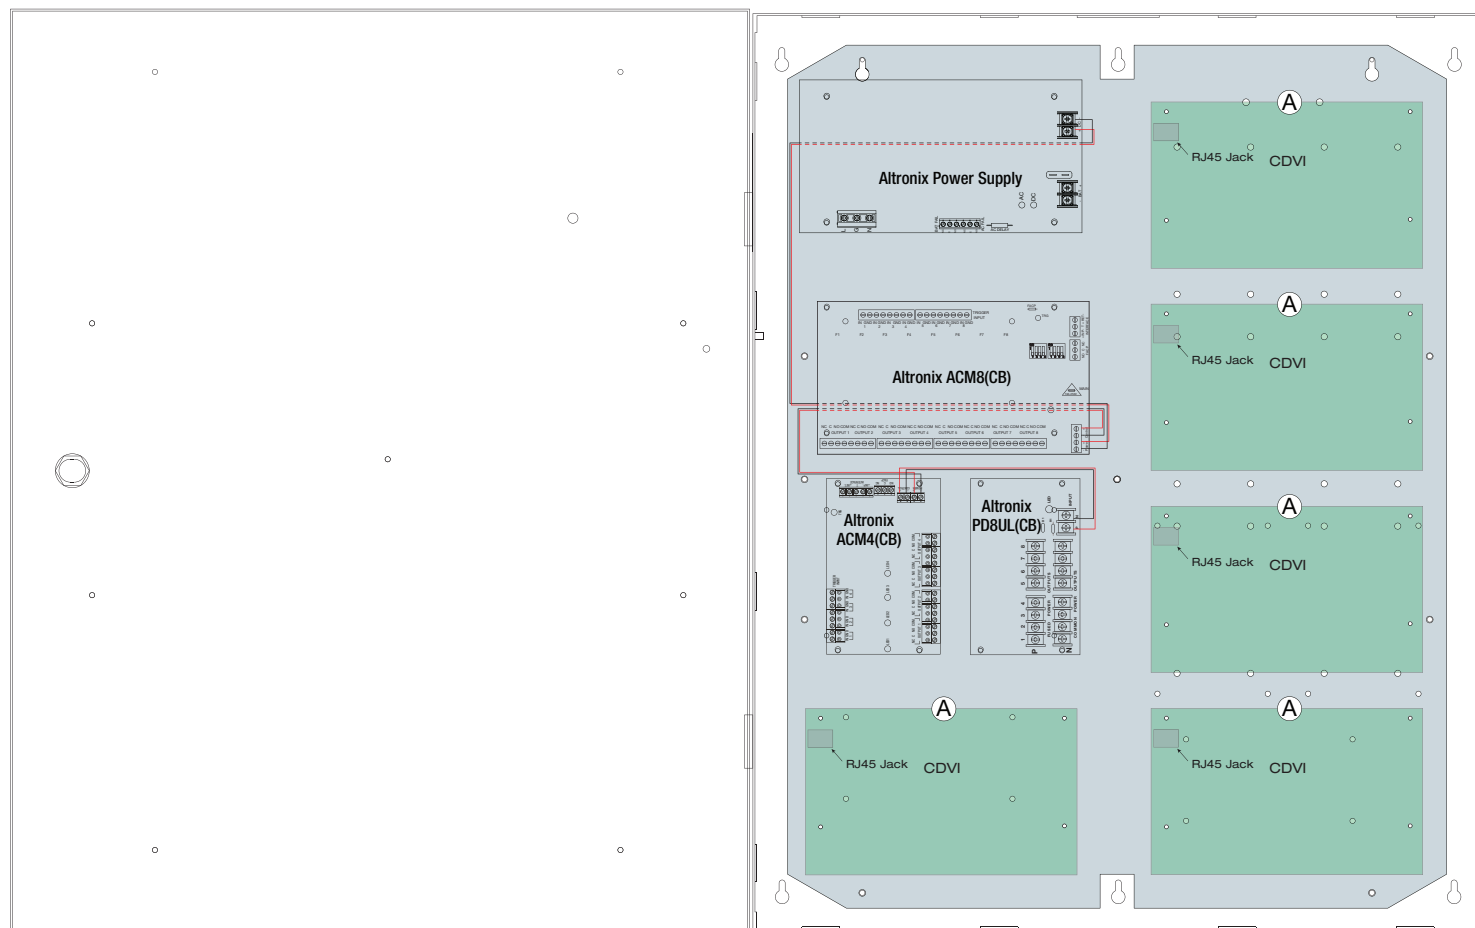

Accessories (order separately)

WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC
with
batteriesTrove2BWC
with
wires**TROVE2BWC - Battery/Wire Trough Enclosure**

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution. The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets. Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

Dimensions and Drawing

Dimensions (H x W x D approximate)

27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

