


## T2MK7F8DQAPV (Kit)

Access & Power Integration Solution for Mercury



Altronix T2MK7F8DQAPV kit consists of Trove2 enclosure, TM2 Mercury/Altronix backplane and TMV2 Mercury/Altronix door backplane with one 24VDC @ 10A power supply/charger; one voltage regulator supplies 12VDC and 24VDC to one eight (8) PTC protected dual input/output network/managed access control module and one eight (8) PTC protected dual input/output network/managed power distribution module. Also included is a 5-Port hardened switch board. This kit also accommodates various combinations of Mercury/Lenel\* boards for up to eight (8) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.

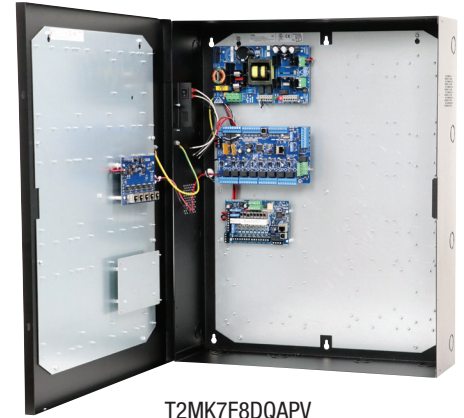

T2MK7F8DQAPV

**\*Also compatible with these authentic Mercury partners:**

AccessNsite, Avigilon, BadgePass, BluBox, Feenics, Genetec, Identocard, IMRON, Johnson Controls, Kastle, Keri Systems, Lenel/S2, LockState, Maxxess, Midpoint Security, NLSS, Open Options, Panasonic Video Insight, Quintron, RS2, Schneider Electric, Vanderbilt



*Mercury boards are not included*

### Key Features

- 24VDC power supply/charger
- Accommodates the following Mercury controllers:  
LP1502, MR52, MR16IN, MR16OUT, LP2500, MUX8,  
MR62e, LP1501, MR50, and Genetec Synergis Cloud Link
- Convenient knockout configuration:
  - One (1) single knockout 2.415" (2" Conduit)
  - Sixteen (16) double knockouts  
1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Supervision
  - AC Fail
  - Low Battery and Battery Presence
  - Low power shutdown
- CE European Conformity
- Lifetime Warranty\*

*\*Altronix Power Supply/Chargers and Sub-Assemblies only*

## Specifications

### Power Supply/Charger (eFlow104NBV):

<b>Input</b>	
Voltage	220VAC (working range 198VAC - 256VAC), 50/60Hz, 2.7A
Input Fuse	6.5A/250V

<b>Outputs</b>	
Voltage	24VDC
Current	10A continuous
Auxiliary	Class 2 power-limited @ 1A (unswitched)
Other	Overvoltage protection. Filtered and regulated

<b>Battery Charging</b>	
Capacity	12VDC/12AH (4 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

<b>Fire Alarm Disconnect</b>	
Supervised	Latching or non-latching
EOL	10K Resistor

<b>Supervision</b>	
AC Failure	Form "C" contacts
Battery	Form "C" contacts

**Low DC Power Shutdown**  
Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units. Prevents deep battery discharge

<b>Indicators (LED)</b>	
Input	220VAC is present
DC Output	Powered

### Network Access Power Controller (LINQ8ACMCB):

<b>Input</b>	
Voltage	24VDC from eFlow104NBV and 12VDC from VR6
Input PTCs	9A

<b>Outputs</b>	
PTC protected outputs	
Any of the eight (8) PTC protected power outputs are selectable to follow power Input 1 or Input 2	
Individual outputs may be set to OFF position for servicing	
Output PTCs:	2.5A

#### Programming Features:

- Eight (8) Programmable Outputs:**
- Fail-safe, fail-secure or auxiliary outputs
  - Input controlled or manually controlled through software
  - High (over) and low (under) voltage and current monitoring by output
  - Multiple outputs may be programmed to be triggered by a single input
  - Battery back-up by output
- Eight (8) Programmable Trigger Inputs:**
- Normally open (NO), Normally closed (NC) or Open collector sink inputs
  - Wet Input (5VDC - 24VDC) with 10k resistor
  - Any combination of the above
- Other Programmable Trigger Inputs:**
- Monitor power supply(ies) input for voltage and current limits (high/low)
  - Input and output current calibration, Programmable timer events
  - Programmable user levels, Enable or disable alerts by type
  - Programmable alert reporting delay

<b>Indicators (LED)</b>	
Green AC LED:	indicates AC trouble condition
Green BAT LED:	indicates battery trouble condition
Green FACP LED:	indicates FACP disconnect is triggered
Flashing Blue Heartbeat LED:	indicates network connection
Individual OUT1 - OUT8 Red LEDs:	indicate outputs are triggered
Individual Voltage LEDs:	indicate 12VDC (Green) or 24VDC (Red)

### Network Power Distribution Module (LINQ8PDCB):

<b>Input</b>	
Voltage	24VDC from eFlow104NBV and 12VDC from VR6
Input PTCs	9A

<b>Outputs</b>	
PTC protected outputs	
Any of the eight (8) PTC protected power outputs are selectable to follow power Input 1 or Input 2	
Individual outputs may be set to OFF position for servicing	
Output PTCs:	2.5A

<b>Status Monitoring</b>	
Power Supply output voltage and load, Voltage and load of each output	
FACP trigger and reset status, Unit temperature (Celsius)	
Power Supply AC and Battery status, Battery health	

<b>Reporting:</b>	
Windows Dashboard Alert messages	
E-mail notifications, Event Log tracks history	

<b>Indicators (LED)</b>	
Bat Local	Charging current status
FACP	Triggered / Released
Input	Input signal
Out1 - Out8	Output status

### 5-Port Hardened Switch (NetWay5B):

<b>Input</b>	12VDC, current draw: 150mA
<b>Ethernet Ports:</b>	Five (5) 10/100/1000 Mbps data ports
	Connectivity: RJ45, auto-crossover
	Wire type: 4-pair CAT5 or better structured cable
	Distance: up to 100m
	Speed: 10/100/1000 Mbps, half/full duplex, auto negotiation

<b>Indicators (LED)</b>	
Individual PoE On LEDs for each port	
Individual IP Link status, 10/100Base-T/active LEDs for each port	

### Voltage Regulator (VR6):

<b>Input</b>	
Voltage	24VDC from eFlow104NBV
<b>Output</b>	
Voltage	12VDC
Current	6A continuous
Other	Surge suppression

<b>Indicators (LED)</b>	
Input	24VDC is present
Output	Powered

### T2MK7F8DQAPV Kit:

<b>Agency Listings</b>	
CE	European Conformity

### Physical and Environmental

<b>Dimensions (H x W x D)</b>	
Enclosure:	27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)
Shipping:	32.5" x 26.5" x 11.125" (825.5mm x 673.1mm x 282.6mm)


<b>Weight (approx.)</b>	
Product	56.3 lb. (25.5 kg)
Shipping	61.3 lb. (27.8 kg)

<b>Temperature</b>	
Operating	0°C to 49°C (32°F to 120°F)
Storage	- 20°C to 70°C (- 4°F to 158°F)

<b>Relative Humidity</b>	85% +/- 5%
<b>BTU/Hr (approx.):</b>	128 BTU/Hr.

**Access Controller Position Chart for the Following Models:**

Mercury	Pem Mounting
LP2500, MUX8	(A)
LP1502, LP4502, MR52, MR16IN, MR16OUT	(B)
LP1501, MR62e	(C)
MR50	(D)

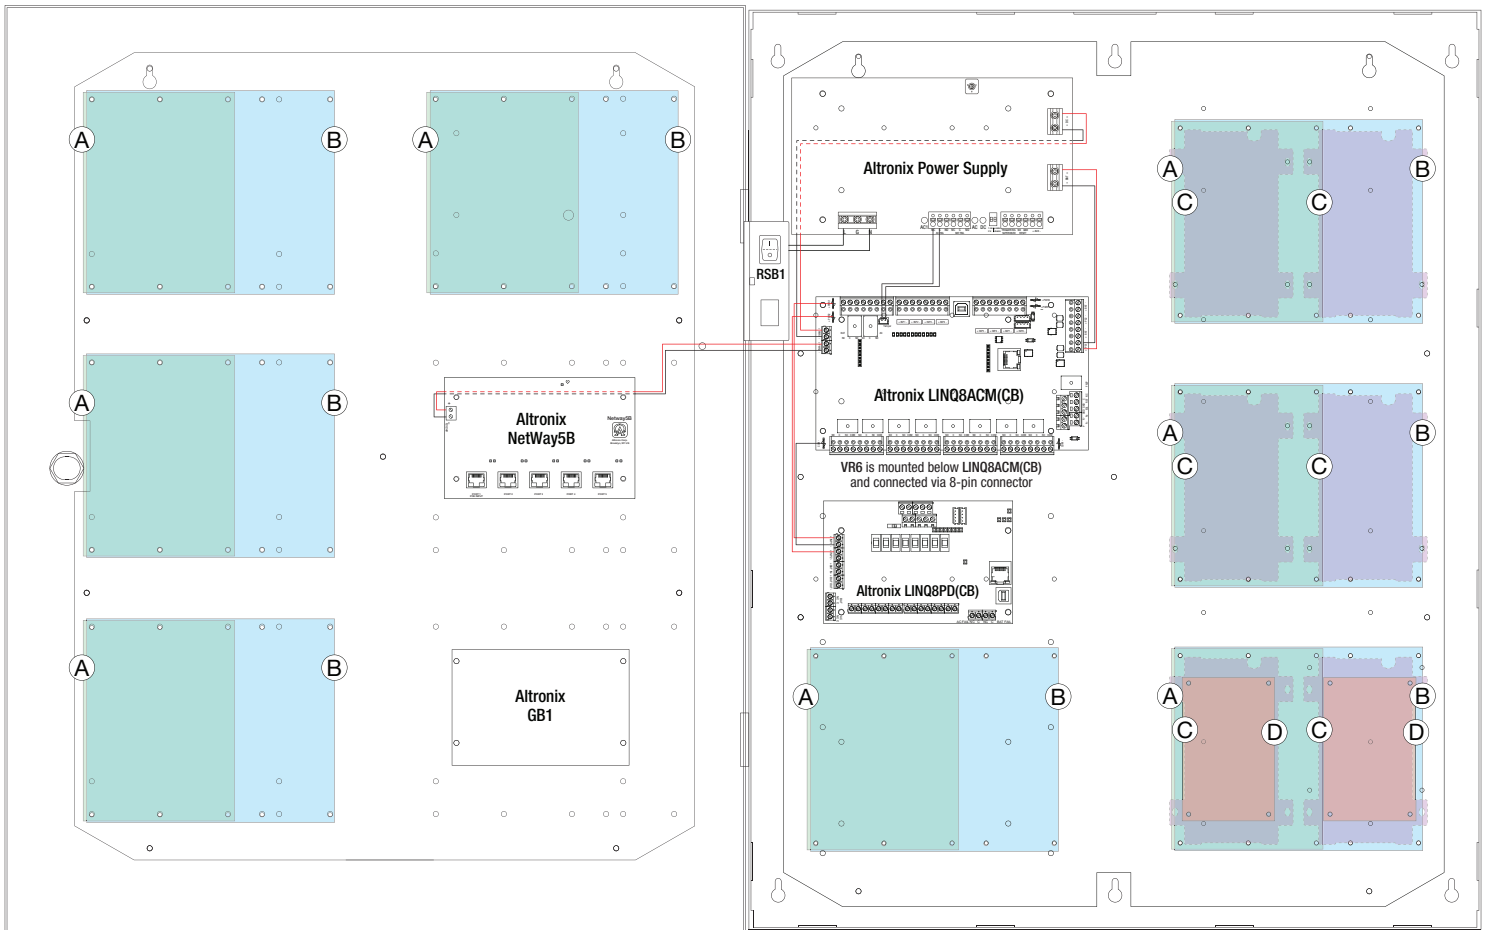

**Accessories** (order separately)



WM5

**WM5, WM25, WM100 - Magnetic Cable Tie Mounts**

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

**MM4, MM8, MM12, MM24 - Magnetic Mounting Solution**

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

**BR1 - Sub-Assembly Mounting Bracket**

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC  
with  
batteries



Trove2BWC  
with  
wires



**TROVE2BWC - Battery/Wire Trough Enclosure**

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution. The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets. Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

**Dimensions and Drawing**

Dimensions (H x W x D approximate)  
 27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

