

T2SSK7514 (Kit)

Access & Power Integration Solution for Lenel-S2



Altronix T2SSK7514 kit consists of Trove2 enclosure, TSS2 Lenel-S2 (S2 Security Platform)/ Altronix backplane with one (1) 24VDC @ 10A power supply/charger, one (1) 12VDC @ 10A power supply/charger, two (2) fused access power controllers and two (2) fused power distribution modules.

This kit also accommodates S2-INST Installation Kit For Lenel-S2 (S2 Security Platform) S2 Network Node for up to fourteen (14) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.



T2SSK7514

**S2 boards are not included*

Key Features

- 24VDC and 12VDC power supply/chargers
- Accommodates S2-INST Installation Kit
- Convenient knockout configuration:
 - One (1) single knockout 2.415" (2" Conduit)
 - Sixteen (16) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Supervision
 - AC Fail
 - Battery Fail and Battery Presence
- Agency Listings:
 - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
 - UL: UL294 - Access Control System
 - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
 - CE European Conformity
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Specifications

Power Supply 1 (AL1024ULXB2):

Input	
Voltage	115VAC 60Hz, 4.2A max
Input Fuse	5A/250V
Output	
Voltage	24VDC
Current	10A @ 24VDC continuous max. Overvoltage protection. Filtered and regulated

Power Supply 2 (AL1012ULXB):

Input	
Voltage	115VAC, 60Hz, 2.6A max
Fusing	5A/250V
Output	
Voltage	12VDC
Current	10A @ 12VDC continuous max Overvoltage protection. Filtered and regulated

Both Power Supplies:

Battery Charging

Capacity	12VDC/12AH (2 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Indicators (LED)

Input	115VAC is present
DC Output	Powered
Battery	Discharged or not connected

Two (2) Power Distribution Modules (PD8UL):

Input	
Voltage	12VDC from AL1012ULXB
Outputs	
Voltage	12VDC
Output Fuses	3.5A/250V
Indicators (LED)	
Green LED	DC Output

Two (2) Access Power Controllers (ACM8):

Input	
Voltage	24VDC from AL1024ULXB2
Input Fuse	10A/250V
Outputs	
Voltage	24VDC
Eight (8) 24VDC independently controlled fused outputs:	
a) Fail-Safe and/or Fail-Secure power outputs	
Form "C" Relays rated 28VAC or VDC @ 2.5A	
b) Auxiliary power outputs (unswitched)	
c) Any combination of the above	
Output Fuses	3.5A/250V
Indicators (LED)	
Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

T2SSK7514 Kit:

Agency Listings


All components of this Trove kit are UL Listed sub-assemblies
Please refer to the corresponding Sub-Assembly Installation Guides
for further information

CE	European Conformity
----	---------------------

Physical and Environmental:

Dimensions (H x W x D)	
Enclosure:	27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)
Shipping:	32.5" x 26.5" x 11.125" (825.5mm x 673.1mm x 282.6mm)
Weight (approx.)	
Product:	49 lb. (22.23 kg)
Shipping:	53.35 lb. (24.2 kg)
Temperature	
Operating	0°C to 49°C (32°F to 120°F)
Storage	- 20°C to 70°C (- 4°F to 158°F)
Relative Humidity	85% +/- 5%
BTU/Hr. (approx.):	191 BTU/Hr.

Access Controller Position Chart for the S2-INST Installation Kit:

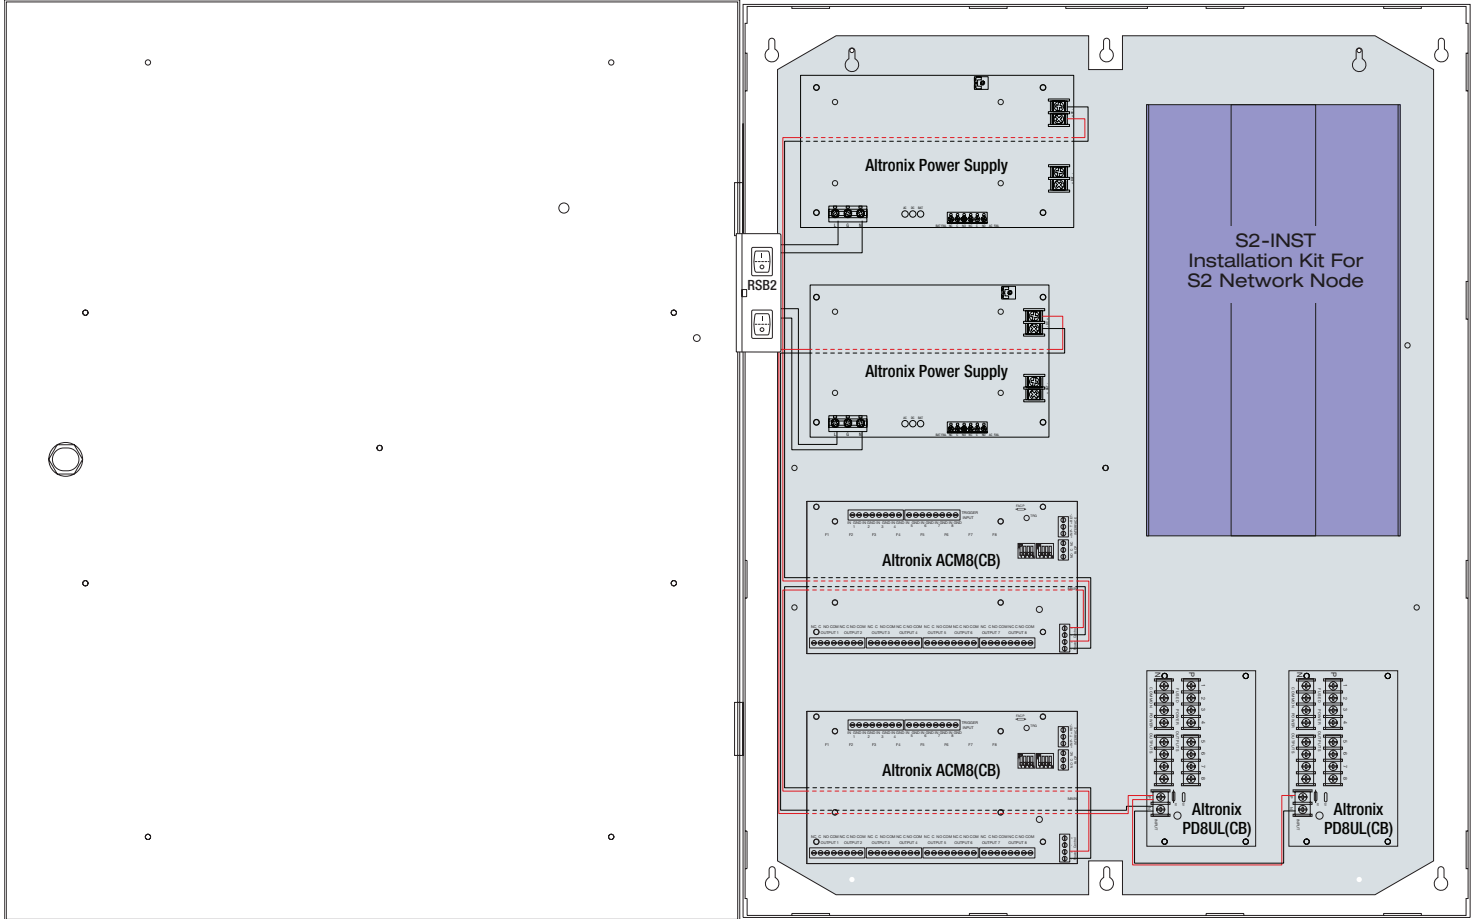

Accessories (order separately)



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.



Trove2BWC
with
batteries

TROVE2BWC - Battery/Wire Trough Enclosure

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution. The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets. Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.



Trove2BWC
with
wires

Dimensions and Drawing

Dimensions (H x W x D approximate)
 27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

