

T3AXK77F16SV (Kit)

Access & Power Integration Solution for Axis Communications



Altronix T3AXK77F16SV kit consists of Trove2 enclosure, TV3 Axis Communications/ Altronix backplane with two (2) 24VDC @ 10A power supply/charger, two (2) eight (8) fuse protected dual input/output access control modules, two (2) 12VDC voltage regulators and two (2) sixteen (16) fuse protected dual input/output power distribution modules. This kit also accommodates up to eight (8) A1601 or A1610 or sixteen (16) A1210 modules for up to sixteen (16) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.



T3AXK77F16SV with eight (8) A1601
DIN Rail is not included

Axis Communications boards are not included



Key Features

- Two (2) 24VDC power supply/chargers
- Accommodates AXIS A1601, A1610 or A1210 modules
- Convenient knockout configuration:
 - One (1) single knockout 2.415" (2" Conduit)
 - Two (2) double knockouts
1.948" (1.5" Conduit) / 1.701" (1.25" Conduit)
 - Thirteen (13) double knockouts
1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Supervision
 - AC Fail
 - Low Battery and Battery Presence
 - Low power shutdown
- Agency Listings:
 - CE European Conformity
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Specifications

Two (2) Power Supply/Chargers (eFlow104NBV):

Input	
Voltage	220VAC (working range 198VAC - 256VAC), 50/60Hz, 2.7A
Input Fuse	6.5A/250V
Outputs	
Voltage	24VDC
Current	10A continuous
Auxiliary	Class 2 power-limited @ 1A (unswitched)
Other	Overvoltage protection. Filtered and regulated

Battery Charging

Capacity	12AH/12VDC (4 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

Fire Alarm Disconnect

Supervised	Latching or non-latching
EOL	10K Resistor

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Low DC Power Shutdown
 Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units. Prevents deep battery discharge

Indicators (LED)

Input	220VAC is present
DC Output	Powered

Two (2) Dual Input Access Power Controllers (ACMS8):

Input	
Voltage	24VDC from eFlow104NBV and 12VDC from VR6
Input Fuses	15A/32V

Outputs

Voltage 12 or 24VDC individually selectable
 Eight (8) selectable 12VDC - 24VDC independently controlled outputs or eight (8) independently controlled Form "C" relay outputs:
 a) Fail-Safe and/or Fail-Secure power outputs
 b) Form "C" Relays. 28VAC or VDC @ 2.5A Rated
 c) Auxiliary power outputs (unswitched)
 d) Any combination of the above

Any of the eight (8) fuse protected power outputs are selectable to follow power Input 1 or Input 2

Individual outputs may be set to OFF position for servicing

Output Fuses	3A/32V
--------------	--------

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Blue LED	FACP disconnect is triggered

Individual voltage LEDs:

Green:	12VDC
Red:	24VDC

Two (2) Voltage Regulators (VR6):

Input	
Voltage	24VDC from eFlow104NBV
Output	
Voltage	12VDC
Current	6A continuous
Other	Surge suppression
Indicators (LED)	
Input	24VDC is present
Output	Powered

Two (2) Dual Input Power Distribution Modules (PDS16):

Input	
Voltage	24VDC from eFlow104NBV and 12VDC from VR6
Input Fuses	15A/32V

Outputs

Voltage 12VDC and/or 24VDC
 Any of the sixteen) power outputs are selectable to follow power Input 1 or Input 2
 Individual outputs may be set to OFF position for servicing

Output Fuses	3A/32V
--------------	--------

Indicators (LED)

DC Output	Sixteen (16) individual output LEDs
Green:	12VDC
Red:	24VDC

T3AXK77F16SV Kit:

Agency Listings

CE	European Conformity
----	---------------------

Physical and Environmental

Dimensions (H x W x D)
 Enclosure: 36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)
 Shipping: 40.75" x 35.25" x 12" (1035.1mm x 895.4mm x 304.8mm)

Weight (approx.)

Product	84.2 lb. (38.2 kg)
Shipping	97.5 lb. (44.22 kg)

Temperature

Operating	0°C to 49°C (32°F to 120°F)
Storage	- 20°C to 70°C (- 4°F to 158°F)

Relative Humidity


85% +/- 5%.

BTU/Hr (approx.):

246 BTU/Hr.

Access Controller Position Chart for the Following Models:

Altronix/Axis Communications	Pem Mounting
Axis 1601, Axis 1610 (mounted onto DIN Rail)	(A)
Axis 1210 (mounted onto DIN Rail)	(B)

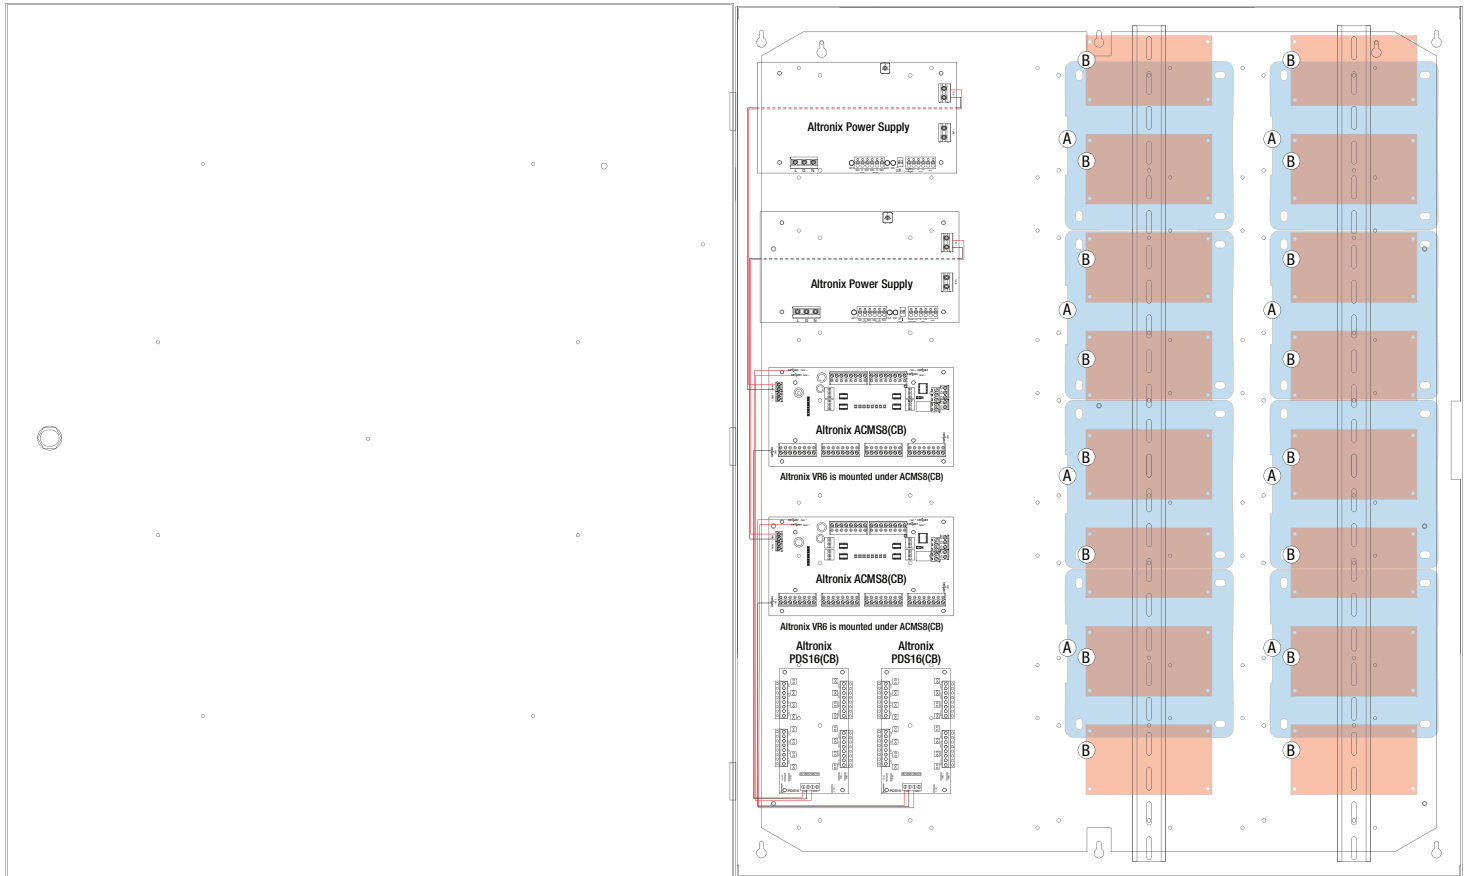

Accessories (order separately)



LINQ2

LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution


Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

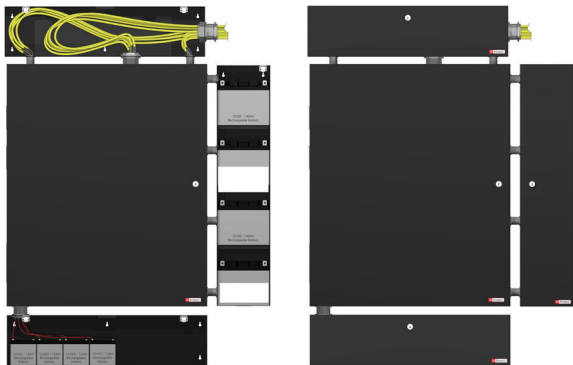

TROVE3BWC / TROVE3SWC - Battery/Wire Trough Enclosure

Altronix Trove3BWC and Trove3SWC are dual-purpose enclosures that can be used as wiring troughs or battery cabinets when mounted above or below (Trove3BWC) or on either side (Trove3SWC) of the Trove integrated power and access solution. The knockouts on the Trove3BWC and Trove3SWC have been strategically placed to line up with the Trove3 allowing for easy conduit connections between cabinets. Trove3BWC and Trove3SWC include cam locks and 2 tamper switches each to ensure access to wiring and batteries is secure.

Typical battery/wiring setup with Trove3 Enclosure (not included)

Dimensions and Drawing

Dimensions (H x W x D approximate)
 36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)

