

**T3CVK7720** (Kit)

Access &amp; Power Integration Solution for CDVI

**TROVE™**

Altronix T3CVK7720 kit consists of Trove3 enclosure, TCV3 CDVI/Altronix backplane with two (2) 24VDC @ 10A power supply/chargers, two (2) 8-output fused access power controllers, one (1) 4-output fused access power controller and one (1) 8-output fused power distribution module. Also featured is a rocker switch bracket with two (2) rocker switches. This kit also accommodate various combinations of CDVI Atrium A22K/A22NB/ADH10 boards for up to twenty (20) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.



T3CVK7720

*\*CDVI Atrium modules are not included***Key Features**

- 24VDC power supply/charger
- Accommodates up to ten (10) CDVI Atrium A22K/A22NB/ADH10 boards
- Convenient knockout configuration:
  - One (1) single knockout 2.415" (2" Conduit)
  - Two (2) double knockouts 1.948" (1.5" Conduit) / 1.701" (1.25" Conduit)
  - Thirteen (13) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Supervision
  - AC Fail
  - Battery Fail and Battery Presence
- Agency Listings:
  - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
  - UL: UL294 - Access Control System
  - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
  - CE European Conformity
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Lifetime Warranty\*

*\*Altronix Power Supply/Chargers and Sub-Assemblies only*

## Specifications

### Two (2) Power Supply/Chargers (AL1024ULXB2):

#### Input

Voltage	115VAC 60Hz, 4.2A max.
Input Fuse	5A/250V

#### Outputs

Voltage	24VDC
Current	10A @ 24VDC continuous max.
Other	Overvoltage protection. Filtered and regulated

### Battery Charging

Capacity	12AH/12VDC (2 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

### Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

### Indicators (LED)

Input	115VAC is present
DC Output	Powered
Battery	Discharged or not connected

### Two (2) Access Power Controllers (ACM8):

#### Input

Voltage	24VDC from AL1024ULXB2
Input Fuse	10A/250V

#### Outputs

Voltage	24VDC
Eight (8) independently controlled fused outputs:	
a) Fail-Safe and/or Fail-Secure power outputs	
Form "C" Relays rated 28VAC or VDC @ 2.5A	
b) Auxiliary power outputs (unswitched)	
c) Any combination of the above	

Output Fuses	3.5A/250V
--------------	-----------

### Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

### Power Distribution Module (PD8UL):

#### Input

Voltage	24VDC from AL1024ULXB2
---------	------------------------

#### Outputs

Voltage	24VDC
Eight (8) fuse protected outputs. 3.5A per output max	
Output Fuses	3.5A/250V

### Indicators (LED)

Green LED	DC Output
-----------	-----------

### Access Power Controller (ACM4):

#### Input

Voltage	24VDC from AL1024ULXB2
Input Fuse	10A/32V

#### Outputs

Voltage	24VDC
Four (4) independently controlled fused outputs:	
a) Fail-Safe and/or Fail-Secure power outputs	
Form "C" Relays rated 28VAC or VDC @ 2.5A	
b) Auxiliary power outputs (unswitched)	
c) Any combination of the above	

Output Fuses	3A/32V
--------------	--------

### Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

### T3CVK7720 Kit:

#### Agency Listings

All components of this Trove kit are UL Listed sub-assemblies  
Please refer to the corresponding Sub-Assembly Installation Guides  
for further information

CE	European Conformity
----	---------------------

### Physical and Environmental:

#### Dimensions (H x W x D)

Enclosure:	36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)
Shipping:	40.75" x 35.25" x 12" (1035.1mm x 895.4mm x 304.8mm)

#### Weight (approx.)

Product:	85 lb. (38.6 kg)
Shipping:	92 lb. (41.73 kg)

#### Temperature


Operating	0°C to 49°C (32°F to 120°F)
Storage	- 20°C to 70°C (- 4°F to 158°F)

Relative Humidity	85% +/- 5%
-------------------	------------

BTU/Hr. (approx.):	263 BTU/Hr.
--------------------	-------------

### Access Controller Position Chart for the Following Models:

CDVI	Pem Mounting
A22K1NB, A22NB, ADH10	(A)

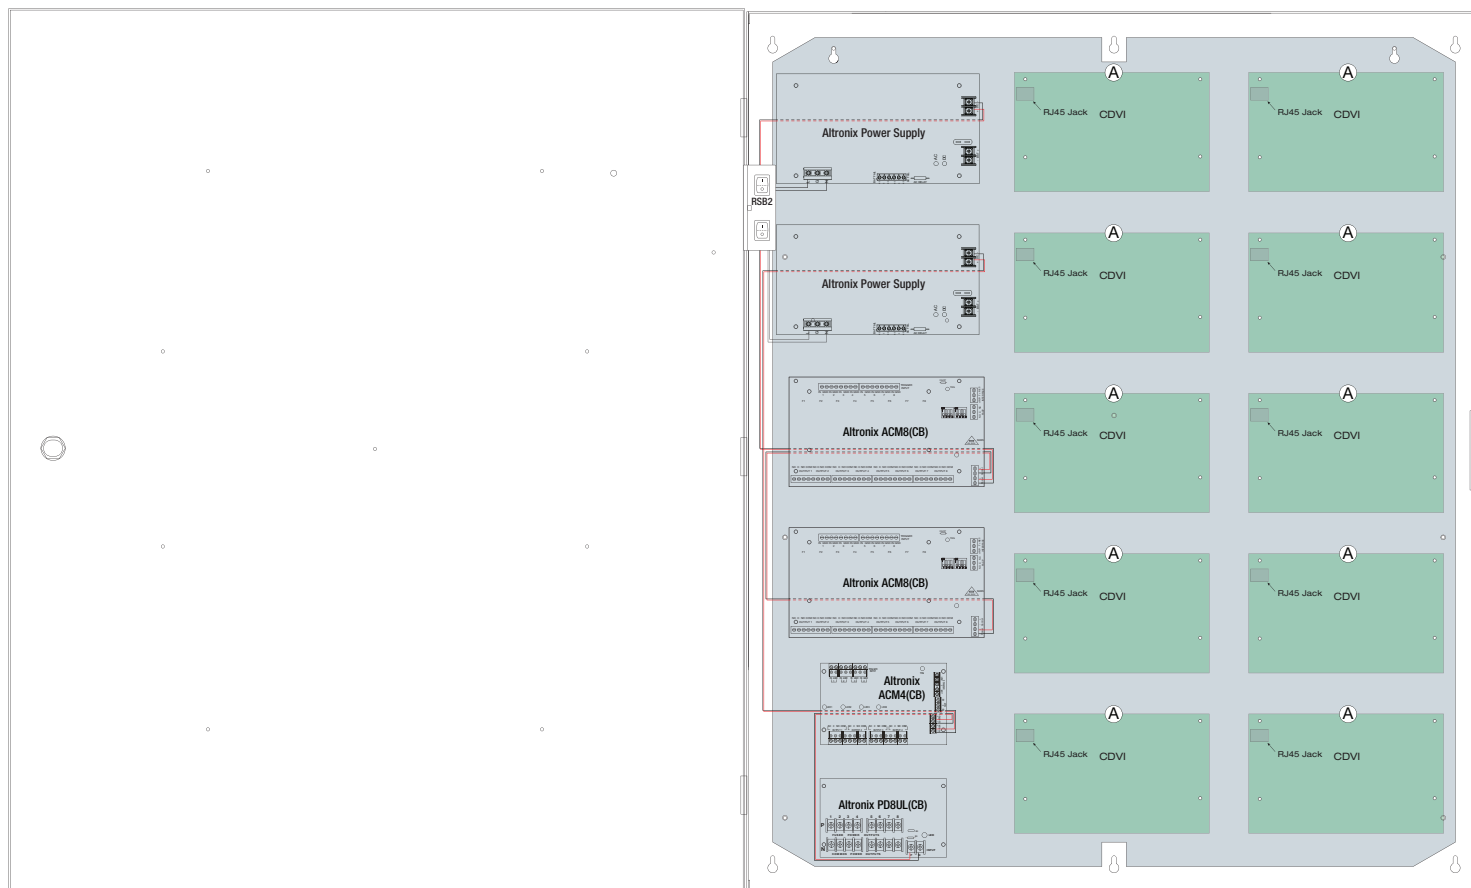

## Accessories (order separately)



WM5

### WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

### MM4, MM8, MM12, MM24 - Magnetic Mounting Solution


Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

### BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

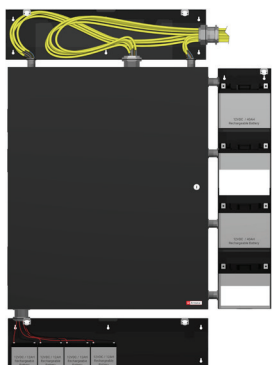

### TROVE3BWC / TROVE3SWC - Battery/Wire Trough Enclosure

Altronix Trove3BWC and Trove3SWC are dual-purpose enclosures that can be used as wiring troughs or battery cabinets when mounted above or below (Trove3BWC) or on either side (Trove3SWC) of the Trove integrated power and access solution. The knockouts on the Trove3BWC and Trove3SWC have been strategically placed to line up with the Trove3 allowing for easy conduit connections between cabinets. Trove3BWC and Trove3SWC include cam locks and 2 tamper switches each to ensure access to wiring and batteries is secure.

*Typical battery/wiring setup with Trove3 Enclosure (not included)*

## Dimensions and Drawing

Dimensions (H x W x D approximate)

36.12" x 30.12" x 7.06" (917.5mm x 768.1mm x 179.3mm)

