

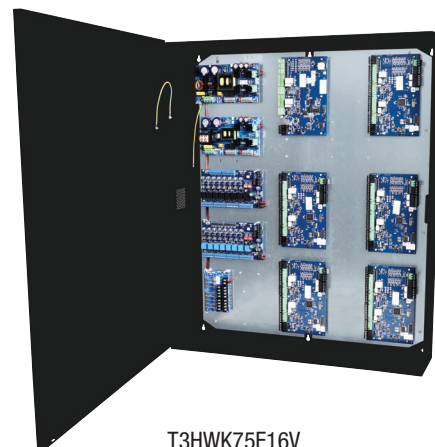
T3HWK75F16V (Kit)

Access & Power Integration Solution for Honeywell

TROVE™

Altronix T3HWK75F16V kit consists of Trove3 enclosure, THW3 Honeywell/Altronix backplane and THWD2 Honeywell/Altronix door backplane with one (1) 24VDC @ 10A and one (1) 12VDC @ 10A power supply/chargers, two (2) 8-output fused access power controllers and one (1) 8-output fused power distribution module. Also featured is a rocker switch bracket with two (2) rocker switches.

Kit also accommodates up to six (6) Honeywell 4200 Series or WIN-PAK Series boards and up to two (2) Honeywell PRO22MX8 boards for up to sixteen (16) doors in a single enclosure. THWD2 accommodates additional one (1) Honeywell PRO22MX8 and up to six (6) Honeywell 4200 Series or WIN-PAK Series. Trove simplifies board layout and wire management, reduces installation time and labor costs.

Honeywell
THE POWER OF **CONNECTED****T3HWK75F16V***Honeywell boards are not included***Key Features**

- 24VDC and 12VDC power supply/chargers
- Accommodates up to six (6) Honeywell 4200 Series or WIN-PAK Series boards and up to two (2) Honeywell PRO22MX8 boards
- Convenient knockout configuration:
 - One (1) single knockout 2.415" (2" Conduit)
 - One (1) double knockout 1.948" (1.5" Conduit) / 1.701" (1.25" Conduit)
 - Sixteen (16) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Supervision
 - AC Fail
 - Low Battery and Battery Presence
 - Low power shutdown
- Agency Listings:
 - CE European Conformity
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Specifications

Power Supply 1 (eFlow104NBV):

Input

Voltage	220VAC (working range 198VAC - 256VAC), 50/60Hz, 2.7A
Input Fuse	6.5A/250V

Output

Voltage	24VDC
Current	10A continuous

Power Supply 2 (eFlow102NBV):

Input

Voltage	220VAC (working range 198VAC - 256VAC), 50/60Hz, 2.1A
Input Fuse	5A/250V

Output

Voltage	12VDC
Current	10A continuous

Both Power Supplies:

Outputs

Auxiliary	Class 2 power-limited @ 1A (unswitched)
Other	Overvoltage protection. Filtered and regulated

Battery Charging

Capacity	12AH/12VDC (2 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

Fire Alarm Disconnect

Supervised	Latching or non-latching
EOL	10K Resistor

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units or 71-73% for 12V units. Prevents deep battery discharge

Indicators (LED)

AC Input	220VAC is present
DC Output	Powered

Two (2) Access Power Controllers (ACM8):

Input

Voltage	24VDC from eFlow104NBV
Input Fuse	10A/250V

Outputs

Voltage	24VDC
Eight (8) independently controlled fused outputs:	
a) Fail-Safe and/or Fail-Secure power outputs	
Form "C" Relays rated 28VAC or VDC @ 2.5A	
b) Auxiliary power outputs (unswitched)	
c) Any combination of the above	

Output Fuses	3.5A/250V
--------------	-----------

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

Power Distribution Module (PD8UL):

Input

Voltage	12VDC from eFlow102NBV
---------	------------------------

Outputs

Voltage	12VDC
Output Fuses	3.5A/250V

Indicators (LED)

Green LED	DC Output
-----------	-----------

T3HWK75F16V Kit:

Agency Listings

CE	European Conformity
----	---------------------

Physical and Environmental

Dimensions (H x W x D)

Enclosure:	36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)
------------	--

Shipping:	40.75" x 35.25" x 12" (1035.1mm x 895.4mm x 304.8mm)
-----------	--

Weight (approx.)

Product:	85 lb. (38.6 kg)
Shipping:	92 lb. (41.73 kg)

Temperature

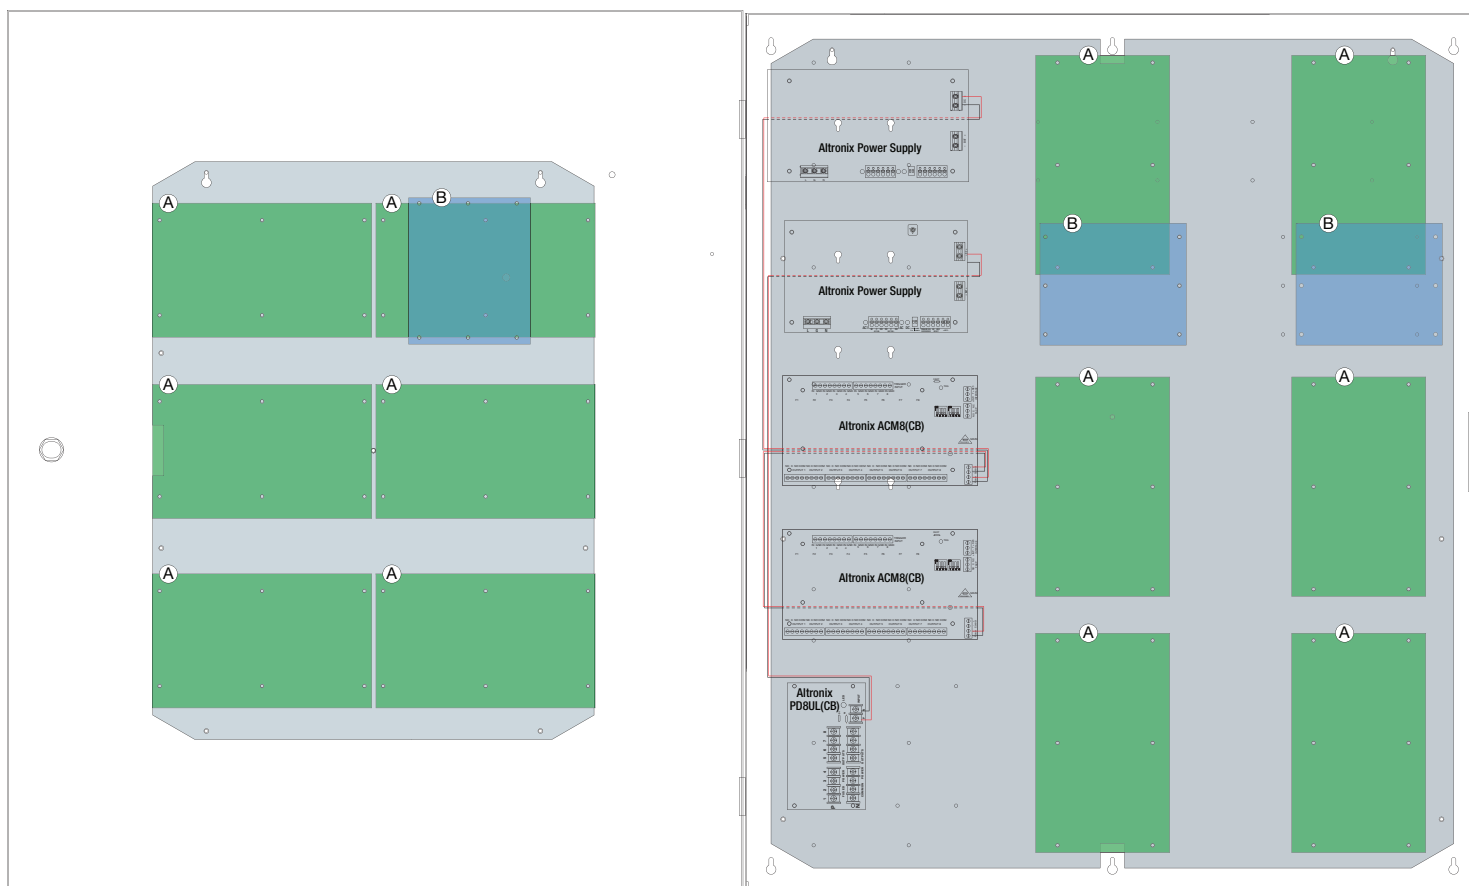
Operating:	0°C to 49°C (32°F to 120°F)
Storage:	- 20°C to 70°C (- 4°F to 158°F)

Relative Humidity

BTU/Hr. (approx.):	85% +/- 5%
--------------------	------------

Access Controller Position Chart for the Following Models:

Honeywell Win-Pak/ProWatch	Pem Mounting
PRO42IC, PRO42R2, PRO42IN, PRO42OUT, PW7K1IC, PW7K1R2, PW7K1IN, PW7K1OUT	(A)
PW7K1ICE, PW7K1R1E	(B)



Accessories (order separately)

LINQ2

LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

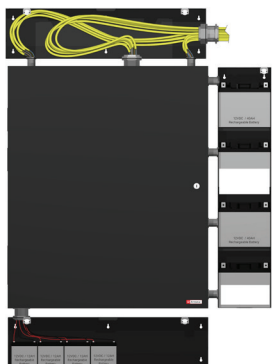
Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

**TROVE3BWC / TROVE3SWC - Battery/Wire Trough Enclosure**

Altronix Trove3BWC and Trove3SWC are dual-purpose enclosures that can be used as wiring troughs or battery cabinets when mounted above or below (Trove3BWC) or on either side (Trove3SWC) of the Trove integrated power and access solution. The knockouts on the Trove3BWC and Trove3SWC have been strategically placed to line up with the Trove3 allowing for easy conduit connections between cabinets. Trove3BWC and Trove3SWC include cam locks and 2 tamper switches each to ensure access to wiring and batteries is secure.

Typical battery/wiring setup with Trove3 Enclosure (not included)

Dimensions and Drawing

Dimensions (H x W x D approximate)

36.12" x 30.12" x 7.06" (917.5mm x 768.1mm x 179.3mm)

