


TempoA2XV

Occupancy Alert System



Altronix TempoA2XV is designed to alert management when unauthorized loitering occurs in up to (two) secure rooms. TempoA2XV has built-in LINQ Technology to remotely monitor, control and report power/diagnostics.

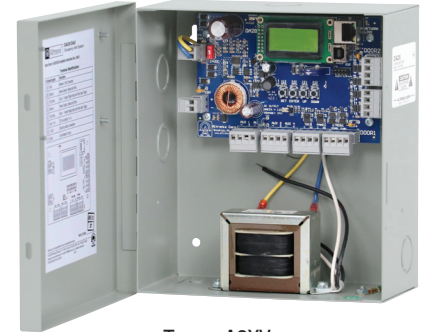

TempoA2XV

Specifications

Input Power Options

AC	220VAC, 50/60Hz, 0.25A (with line cord and transformer)
Trigger	Two (2) Door Sensor/Trigger inputs Two (2) Strobe "Steady" Trigger Inputs Two (2) Strobe "Flash" Trigger Inputs Two (2) "Panic/Emergency" Trigger Inputs

Output Options:

12VDC/2.5A, 24VDC/1.25A, (30W) Two (2) Strobe Switched Power Outputs Four (4) Aux. Power Outputs
--

Timer

- Alphanumeric LCD display simplifies programming.
- EE Prom memory protects against loss of programming due to power failure
- Momentary and/or Latching Events

Battery Charging

Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

Indicators (LED)

AC Power (Green)	Input voltage is present
DC Output (Red)	12/24VDC is on
Trigger	Active

LINQ Technology:

- Remote network management allows for device reset and monitoring
- Provides local and/or remote access to critical information via LAN/WAN
- Email and Windows Dashboard Alert notifications report real-time diagnostics
- Event log tracks history


Physical and Environmental

- 1/2" and 3/4" combination knockouts
- Dimensions (H x W x D)**
8.5" x 7.5" x 3.5" (215.9mm x 190.5mm x 88.9mm)
- Weight (approx.)**
 - Product: 4.85 lb. (2.2 kg)
 - Shipping: 5.45 lb. (2.47 kg)
- Temperature**
 - Operating: 0°C to 49°C (32°F to 120°F).
 - Storage: -20°C to 70°C (-4°F to 158°F)
- Relative Humidity**: 85% +/- 5%
- BTU/Hr. (approx.):** 14 BTU/Hr.

Lifetime Warranty

Dimensions and Drawing

Dimensions (H x W x D approximate)
8.5" x 7.5" x 3.5" (215.9mm x 190.5mm x 88.9mm)

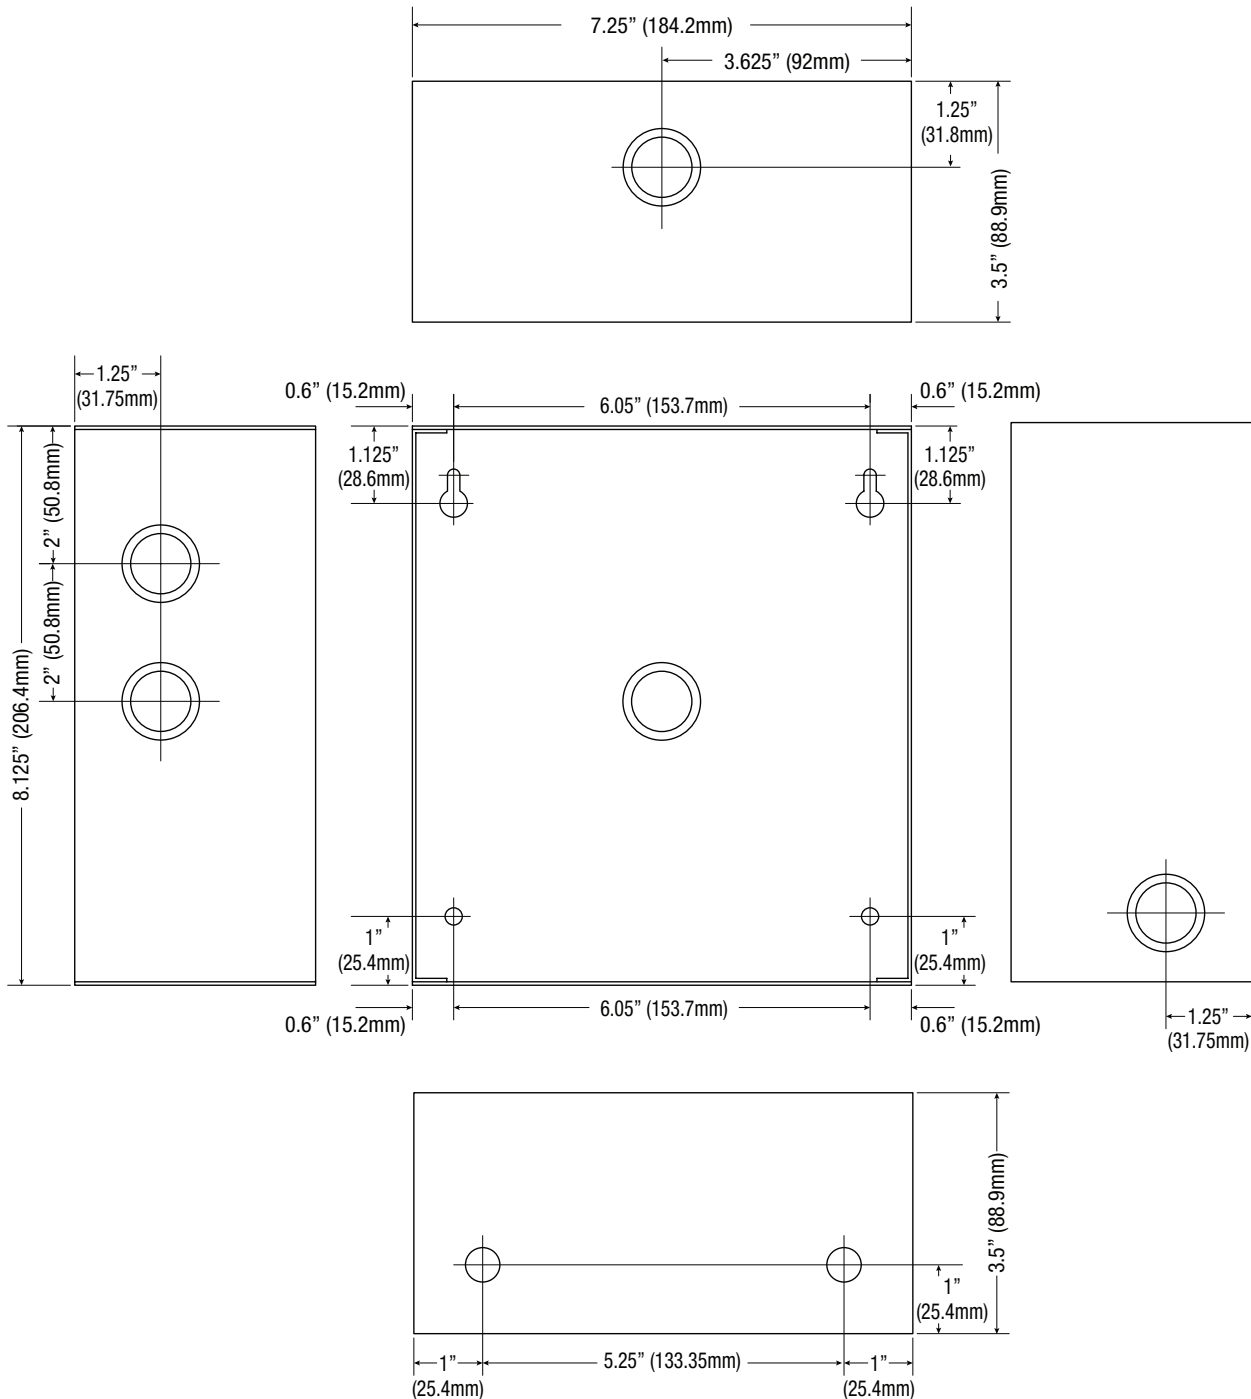

Lifetime Warranty