

eFlow102NBV

Power Supply/Charger Board



Altronix eFlow102NBV power supply/charger converts a 220VAC (working range 198VAC - 256VAC), 50/60Hz input into a single 12VDC output. It also offers a suite of features that includes fire alarm disconnect, overvoltage protection, and low power disconnect which prevents deep discharge of stand-by batteries.



Specifications

Input

Voltage 220VAC (working range 198VAC - 256VAC),

50/60Hz, 2.1A max.

Fusing 5A/250V

Outputs

Voltage 12VDC

Current 10A continuous max.
Auxiliary 1A (unswitched)
Other Overvoltage protection

Filtered and regulated

Battery Charging

Type Sealed lead acid or gel type

Fuse Rating 15A/32V

Failover Upon AC loss, instantaneous

Batteries are sold separately

Supervision

AC Failure Form "C" contacts

Battery Form "C" contacts

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 71-73% for 12V units (depending on the power supply)

Prevents deep battery discharge

Fire Alarm Disconnect

Supervised Latching or non-latching

EOL 10K Resistor

Indicators (LED)

Input 220VAC is present

DC Output Powered

Battery Discharged or not connected

Agency Listings

CE European Conformity

Physical and Environmental

Dimensions (L x W x H)

Board: 7.5" x 4.6" x 1.75" (190.5mm x 116.8mm x 44.5mm) Shipping: 10" x 8" x 4" (254mm x 203.2mm x 101.6mm)

Weight (approx.)

Product Weight: 0.85 lb. (0.39 kg) Shipping Weight: 1.0 lb. (0.45 kg)

Temperature

Operating: 0°C to 49°C (32°F to 120°F) Storage: - 20°C to 70°C (- 4°F to 158°F)

Relative Humidity 85% +/- 5% BTU/Hr (approx.) 61 BTU/Hr.




eFlow102NBV

Power Supply/Charger Board



Board Dimensions (L x W x H) and Drawing

7.5" x 4.6" x 1.75" (190.5mm x 116.8mm x 44.5mm) Mounting Holes' Tolerance: +/- 0.04 in. (1mm).

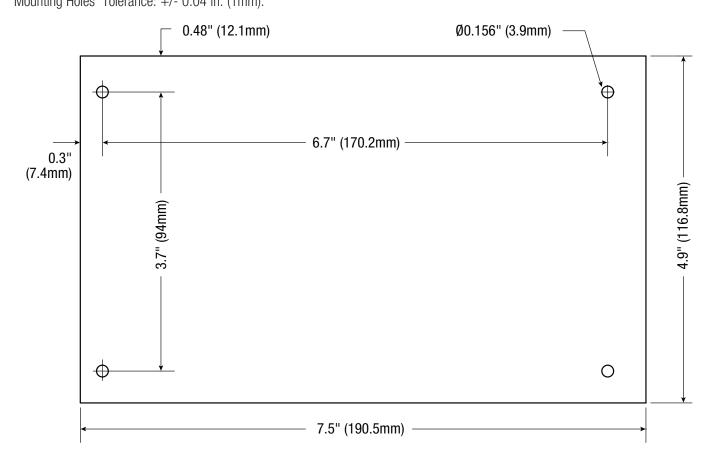

Accessories (order separately)



LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email

