



T2428100CP220 AC Power Supply

Overview:

T2428100CP220 AC power supply provides power for electronic power supplies and equipment, including security, access control, and surveillance devices.

Specifications:

Input: 220VAC 50/60Hz, 0.5A.

Output: 24VAC @ 4A or 28VAC @ 3.5A supply current.
In-line fuse via rated @ 3.5A/250V.

Installation Instructions:



1. Mount T2428100CP220 in desired location.
2. Connect the AC (220VAC 50/60 Hz) to the black and red flying leads of the transformer (*Fig. 1*).
3. Measure output voltage before connecting device.
This helps avoiding potential damage.
For 24VAC configuration use brown and yellow leads,
for 28VAC configuration use brown and black leads.

WARNING: This installation should be made by qualified service personnel and should conform to the National Electrical Code and all local codes.

Enclosure Dimensions (H x W x D approximate):

8.5" x 7.5" x 3.5" (215.9mm x 190.5mm x 88.9mm)

Fig. 1

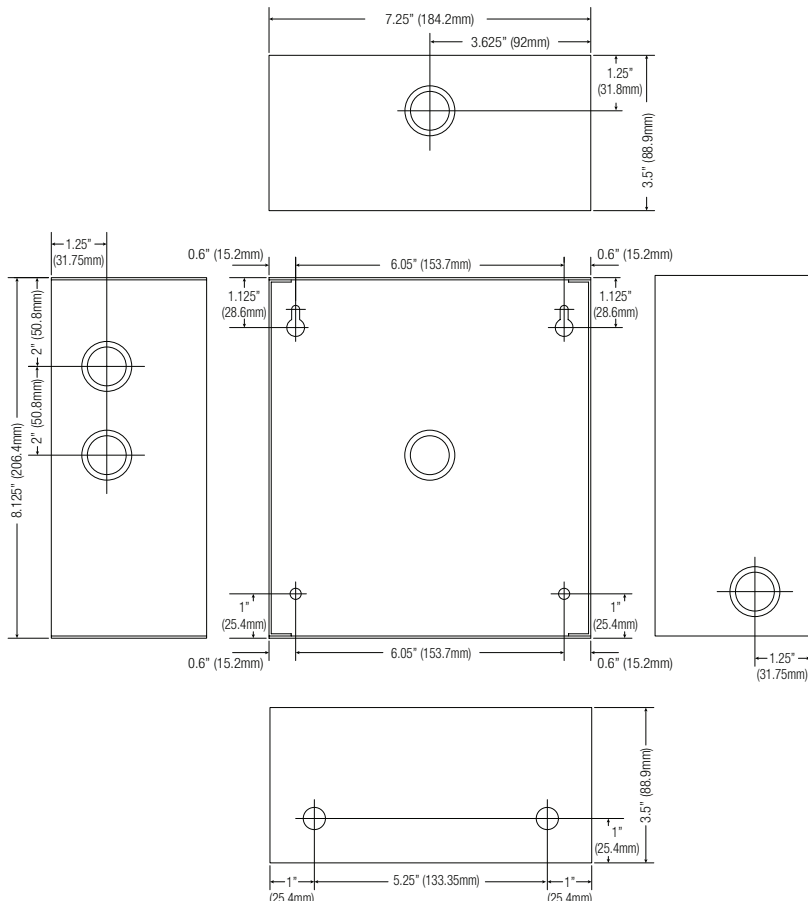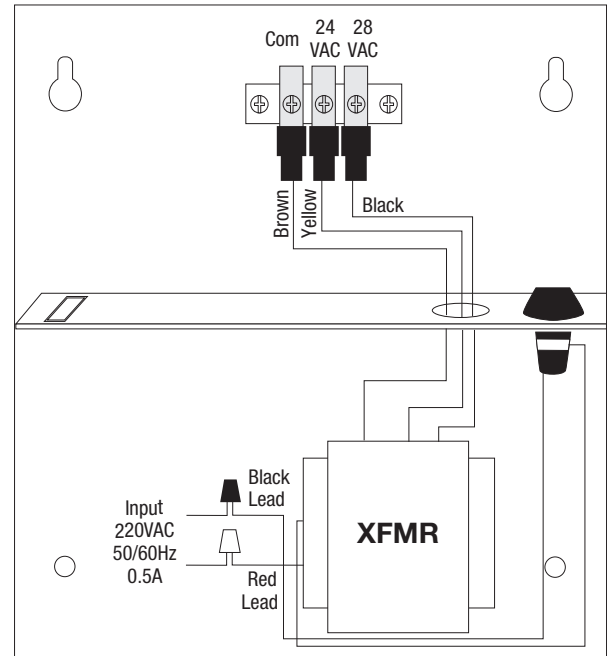

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.

140 58th Street, Brooklyn, New York 11220 USA | phone: 718-567-8181 | fax: 718-567-9056
website: www.altronix.com | e-mail: info@altronix.com | Lifetime Warranty
IIT2428100CP220 - Rev. 090905

L13U

