

TROVE™

Access & Power Integration

Altronix/HID Aero Kits

Models Include:

T1VK3F4

4 Door Kit with Fused Outputs

Fully assembled kit includes:

- Trove1 enclosure with TV1 Altronix/HID Aero backplane
- One (1) eFlow6NB - Power Supply/Charger
- One (1) ACM4 - Fused Access Power Controller
- One (1) VR6 - Voltage Regulator
- One (1) PDS8 - Dual Input Fused Power Distribution Module

T2VK7F8

8 Door Kit with Fused Outputs

Fully assembled kit includes:

- Trove2 enclosure with TV2 Altronix/HID Aero backplane
- One (1) eFlow104NB - Power Supply/Charger
- One (1) ACM8 - Fused Access Power Controller
- One (1) VR6 - Voltage Regulator
- One (1) PDS8 - Dual Input Fused Power Distribution Module

T3VK75F20

20 Door Kit with Fused Outputs

Fully assembled kit includes:

- Trove3 enclosure with TV3 Altronix/HID Aero backplane
- One (1) eFlow104NB - Power Supply/Charger
- One (1) eFlow102NB - Power Supply/Charger
- Two (2) ACM8 - Fused Access Power Controllers
- One (1) ACM4 - Fused Access Power Controller
- One (1) PD8UL - Fused Power Distribution Module
- One (1) RSB2 - Rocker Switch Bracket with Two (2) Switches
(Not evaluated by UL)

T1VK3F4D

4 Door Kit with PTC Outputs

Fully assembled kit includes:

- Trove1 enclosure with TV1 Altronix/HID Aero backplane
- One (1) eFlow6NB - Power Supply/Charger
- One (1) ACM4CB - PTC Access Power Controller
- One (1) VR6 - Voltage Regulator
- One (1) PDS8CB - Dual Input PTC Power Distribution Module

T2VK7F8D

8 Door Kit with PTC Outputs

Fully assembled kit includes:

- Trove2 enclosure with TV2 Altronix/HID Aero backplane
- One (1) eFlow104NB - Power Supply/Charger
- One (1) ACM8CB - PTC Access Power Controller
- One (1) VR6 - Voltage Regulator
- One (1) PDS8CB - Dual Input PTC Power Distribution Module

T3VK75F20D

20 Door Kit with PTC Outputs

Fully assembled kit includes:

- Trove3 enclosure with TV3 Altronix/HID Aero backplane
- One (1) eFlow104NB - Power Supply/Charger
- One (1) eFlow102NB - Power Supply/Charger
- Two (2) ACM8CB - PTC Access Power Controllers
- One (1) ACM4CB - PTC Access Power Controller
- One (1) PD8ULCB - PTC Power Distribution Module
- One (1) RSB2 - Rocker Switch Bracket with Two (2) Switches
(Not evaluated by UL)

All components of these Trove kits are UL Listed sub-assemblies.

Please refer to the included corresponding Sub-Assembly Installation Guides for further information.

Installation Guide



All registered trademarks are property of their respective owners.

Rev. TVK_052924

Installing Company: _____ Service Rep. Name: _____

Address: _____ Phone #: _____



More than just power.™

Overview:

Altronix Trove HID Aero kits are pre-assembled and consist of Trove enclosures/backplanes with factory installed Altronix power supply/chargers and sub-assemblies. All kits accommodate a variety of HID Aero modules for up to four (T1VK3F4), eight (T2VK7F8) or twenty (T3VK75F20) doors in a single enclosure.

Configuration Chart:


Altronix Model Number	120VAC 60Hz Input Current (A)	Power Supply Board Input Fuse Rating	Power Supply Board Battery Fuse Rating	Maximum Supply Current for Main and Aux. Outputs on Power Supply board and ACM4(CB)/ACM8(CB) Access Power Controllers' outputs	Nominal DC Output Voltage		Fail-Safe/Fail-Secure Outputs	Additional Fused Outputs	ACM4(CB)/ACM8(CB) Board Input Fuse (PTC) Rating	ACM4(CB)/ACM8(CB) Board Output Fuse (PTC) Rating	PDS8(CB) Board Input Fuse (PTC) Rating	PDS8(CB) Board Output Fuse (PTC) Rating	PD8UL(CB) Board Output Fuse (PTC) Rating
					[DC]	[Aux]							
					Output Range (VDC)	Output Range (VDC)							
T1VK3F4	3.5	5A/ 250V	15A/ 32V	24VDC @ 5.7A	20.17-26.4	20.28-26.4	4	8	10A/ 32V	3A/ 32V	10A/ 32V	3A/ 32V	-
T1VK3F4D									9A	2.5A	9A	2.5A	
T2VK7F8	4.5	6.3A/250V	15A/ 32V	24VDC @ 9.7A	20.17-26.4	20.28-26.4	8	8	10A/ 250V	3.5A/ 250V	10A/ 32V	3A/ 32V	-
T2VK7F8D										2.5A	9A	2.5A	
T3VK75F20	7.5	eFlow104NB 6.3A/ 250V	15A/ 32V	24VDC @ 9.1A	20.17-26.4	20.28-26.4	20	8	10A/ 32V	3.5A/ 250V	-	-	3.5A/ 250V
		eFlow102NB 5A/ 250V		12VDC @ 10A	9.7-13.2	10.03-13.2							
T3VK75F20D		eFlow104NB 6.3A/ 250V		24VDC @ 9.1A	20.17-26.4	20.28-26.4							
		eFlow102NB 5A/ 250V		12VDC @ 10A	9.7-13.2	10.03-13.2							

Installation Instructions for Trove1, Trove2, Trove3:




Wiring methods shall be in accordance with the National Electrical Code/NFPA 70/ANSI, and with all local codes and authorities having jurisdiction. Product is intended for indoor use only.

1. Remove backplane from enclosure. Do not discard hardware.
2. Mark and predrill holes in the wall to line up with the top two/three keyholes in the enclosure. Install two/three upper fasteners and screws in the wall with the screw heads protruding. Place the enclosure's upper keyholes over the two/three upper screws, level and secure. Mark the position of the lower two/three holes. Remove the enclosure. Drill the lower holes and install the two/three fasteners. Place the enclosure's upper keyholes over the upper screws. Install the two/three lower screws and make sure to tighten all screws.
3. Mount included UL Listed tamper switch (Altronix Model TS112 or equivalent) in desired location, opposite hinge. Slide the tamper switch bracket onto the edge of the enclosure approximately 2" from the right side (Fig. 1, pg. 2). Connect tamper switch wiring to the Access Control Panel input or the appropriate UL Listed reporting device. To activate alarm signal open the door of the enclosure.
4. Mount HID Aero modules to backplane(s), refer to *pages 3, 4, 5*.
5. Refer to the *eFlow Power Supply/Charger Installation Guide* for eFlow6NB, eFlow104NB, eFlow102NB and corresponding *Sub-Assembly Installation Guides* for ACM4(CB), ACM8(CB), PDS8(CB), VR6 and PD8UL(CB) for further installation instructions.

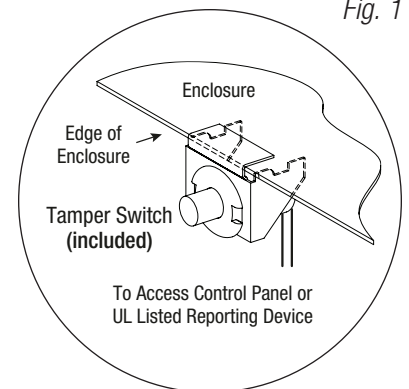Fig. 1



Hardware:

 Nylon Spacer |
  5/8" Pan Head Screw |
  Lock Nut

T1VK3F4 and T1VK3F4D: Installation Instructions for HID Aero Access Controllers

1. Fasten spacers (provided) onto metal pems configuration (A) of backplane (Fig. 2, pg. 3).
2. Mount HID Aero modules to spacers utilizing 7/8" pan head screws (provided) (Fig. 2a, pg. 3).
3. Fasten backplane to Trove1 enclosure utilizing hardware (provided).

HID Aero Access Controller Position Chart for the Following Models:

Sub-Assembly	Pem Mounting
X100, X200, X300, X1000, X2000	(A)

Fig. 2

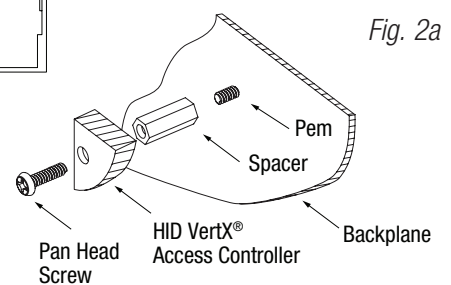


Fig. 2a



T2VK7F8: Installation Instructions for HID Aero Access Controllers

1. Fasten spacers (provided) onto metal pems configuration (A) of backplane (Fig. 3, pg. 4).
2. Mount HID Aero modules to spacers utilizing 7/8" pan head screws (provided) (Fig. 3a, pg. 4).
3. Fasten backplane to Trove2 enclosure utilizing hardware (provided).

HID Aero Access Controller Position Chart for the Following Models:

Sub-Assembly	Pem Mounting
X100, X200, X300, X1000, X2000	(A)

Fig. 3

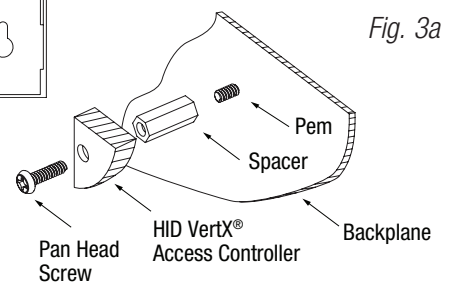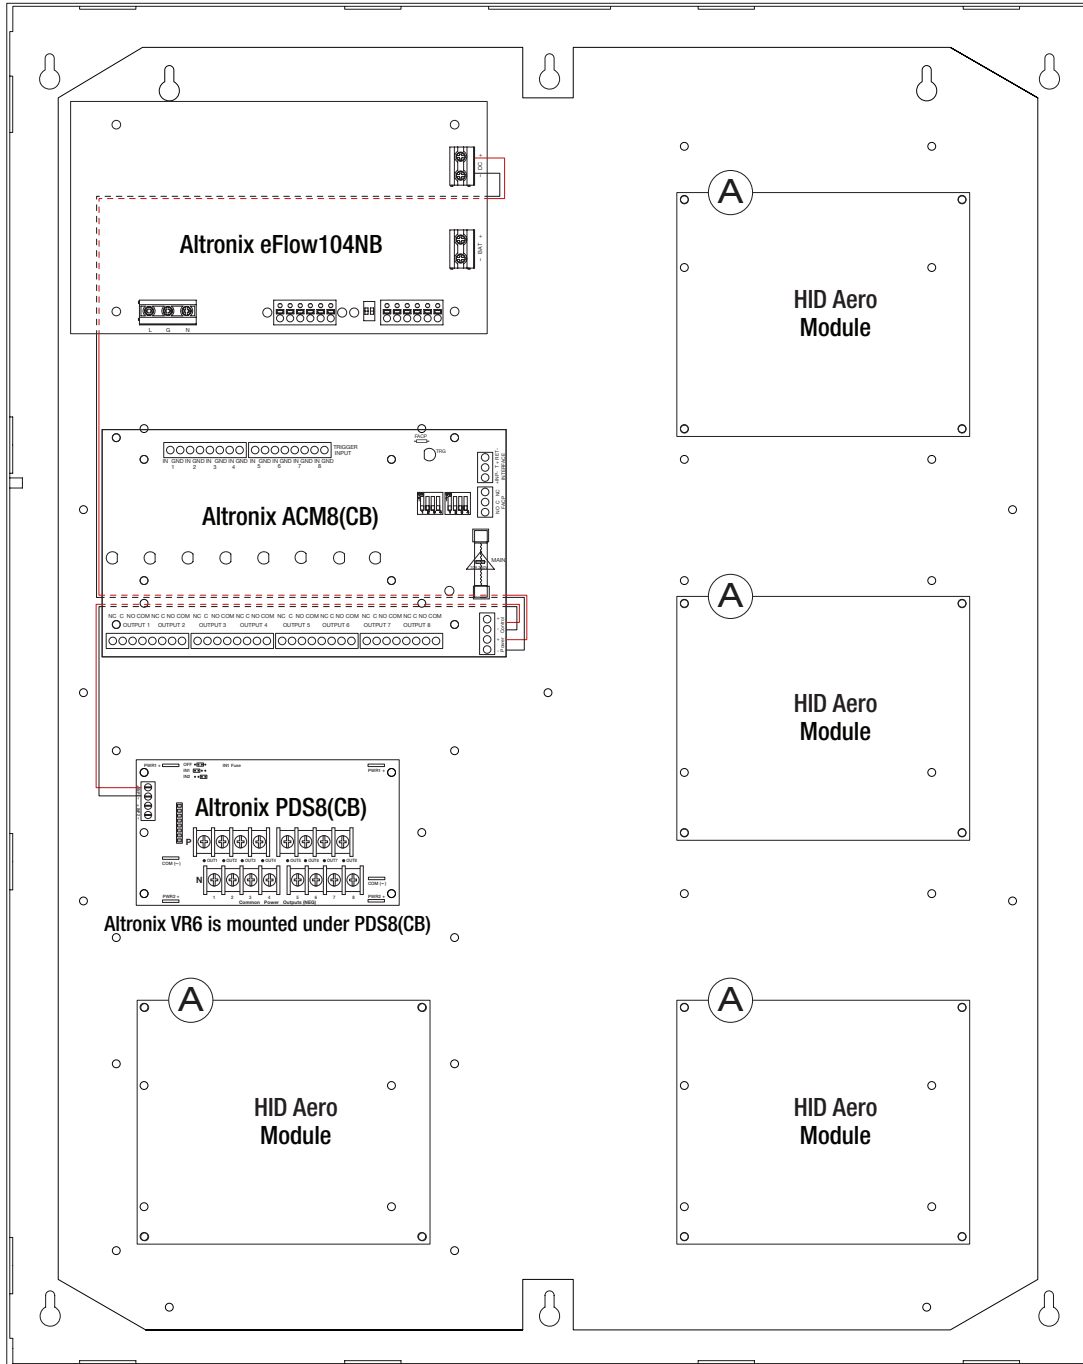

T3VK75F20: Installation Instructions for HID Aero Access Controllers

1. Fasten spacers (provided) onto metal pems configuration (A) of backplane (Fig. 4, pg. 5).
2. Mount HID Aero modules to spacers utilizing 7/8" pan head screws (provided) (Fig. 4a, pg. 5).
3. Fasten backplane to Trove3 enclosure utilizing hardware (provided).

HID Aero Access Controller Position Chart for the Following Models:

Sub-Assembly	Pem Mounting
X100, X200, X300, X1000, X2000	(A)

Fig. 4



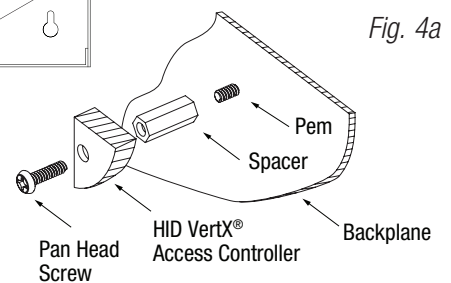



Fig. 4a

T1VK3F4 (Trove1) Enclosure Dimensions (H x W x D approximate):

18" x 14.5" x 4.625" (457mm x 368mm x 118mm)

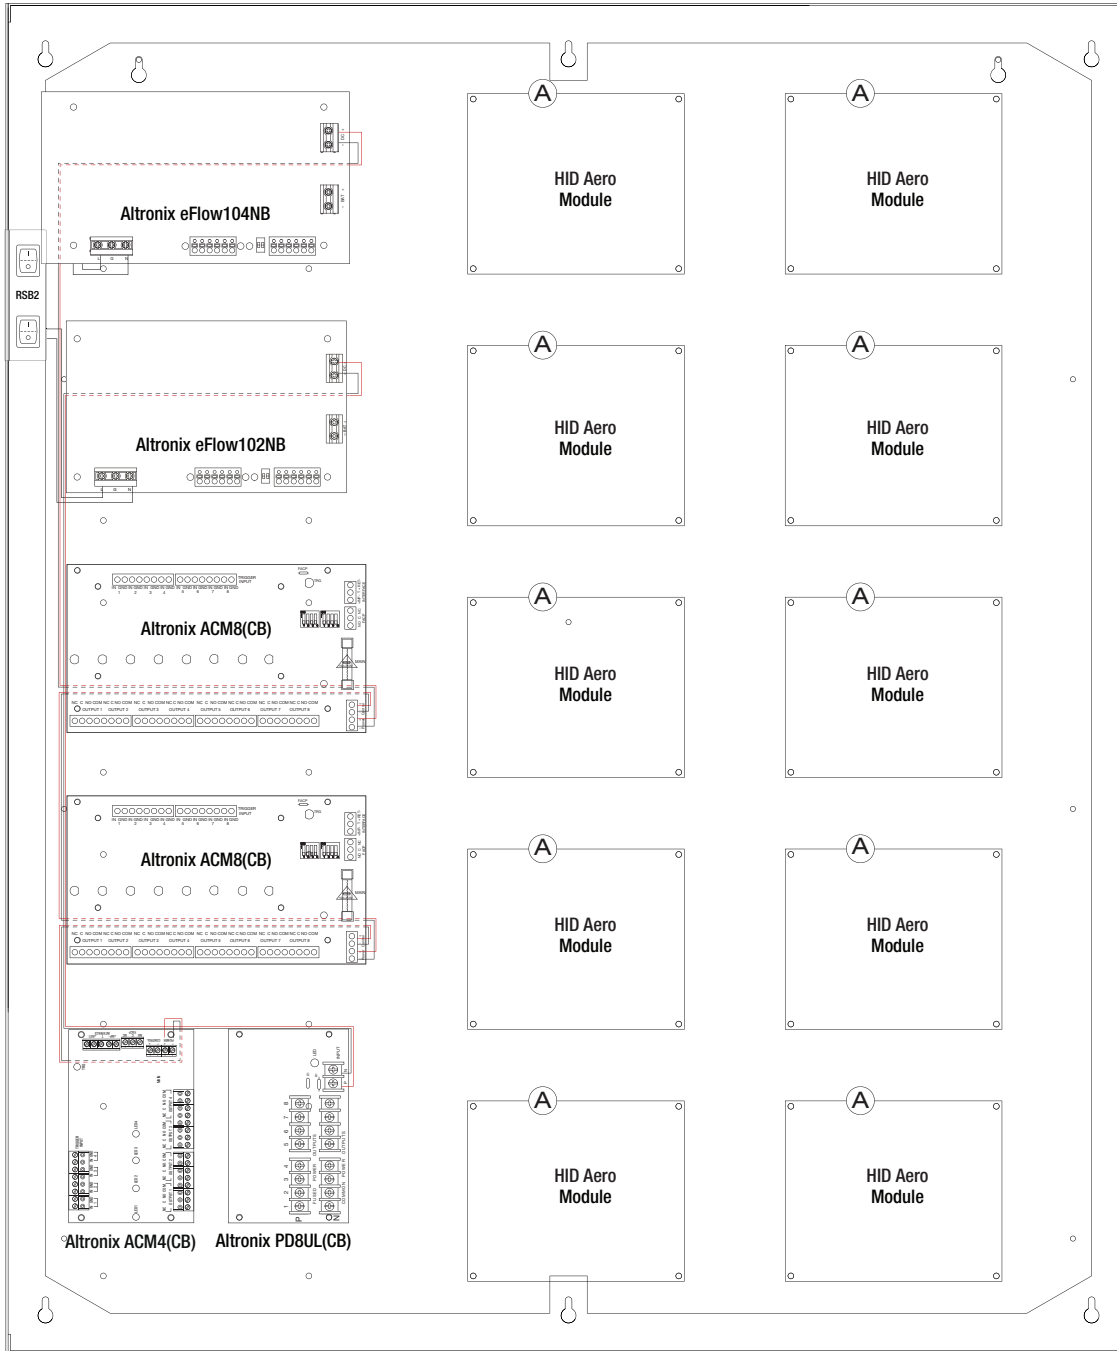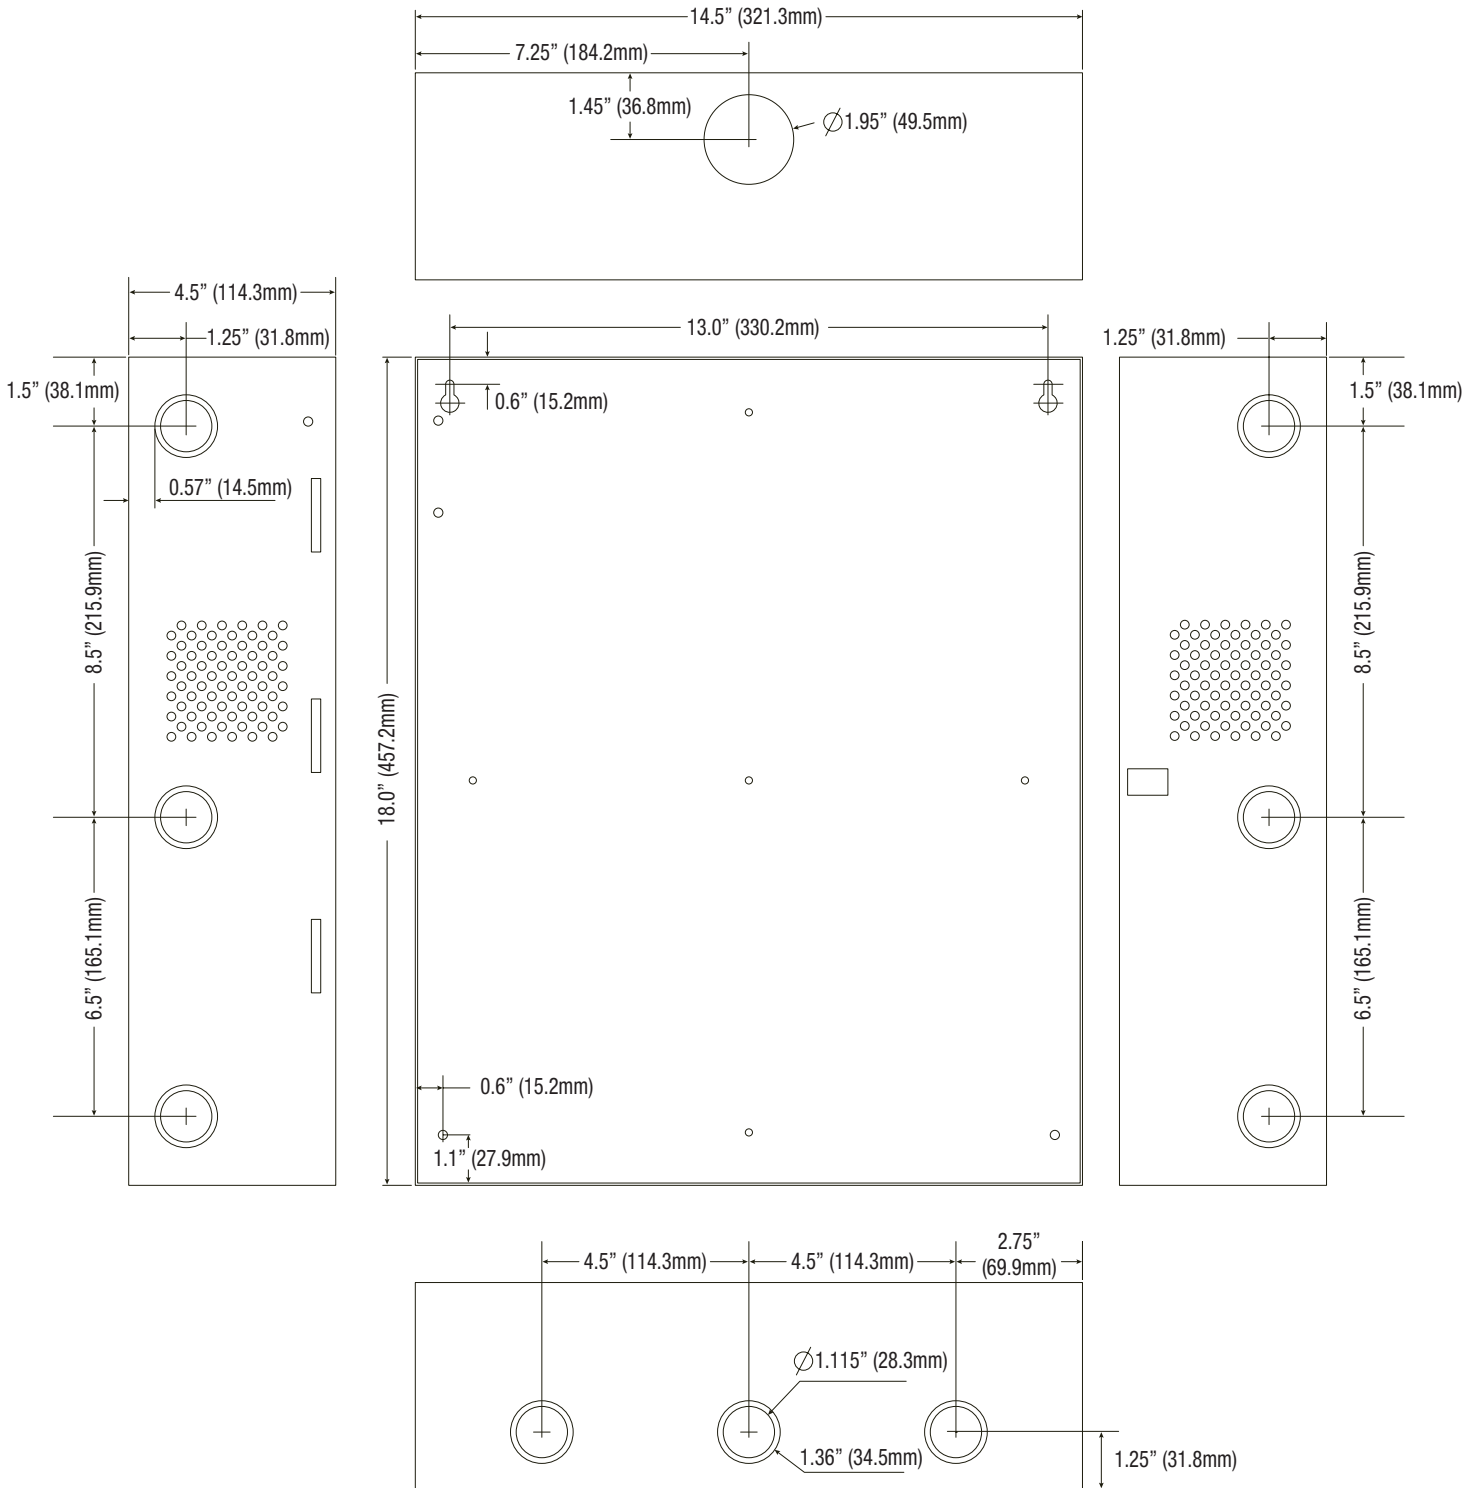


T2VK7F8 (Trove2) Enclosure Dimensions (H x W x D approximate):
 27.25" x 21.75" x 6.5" (692.15mm x 546.1mm x 165.1mm)

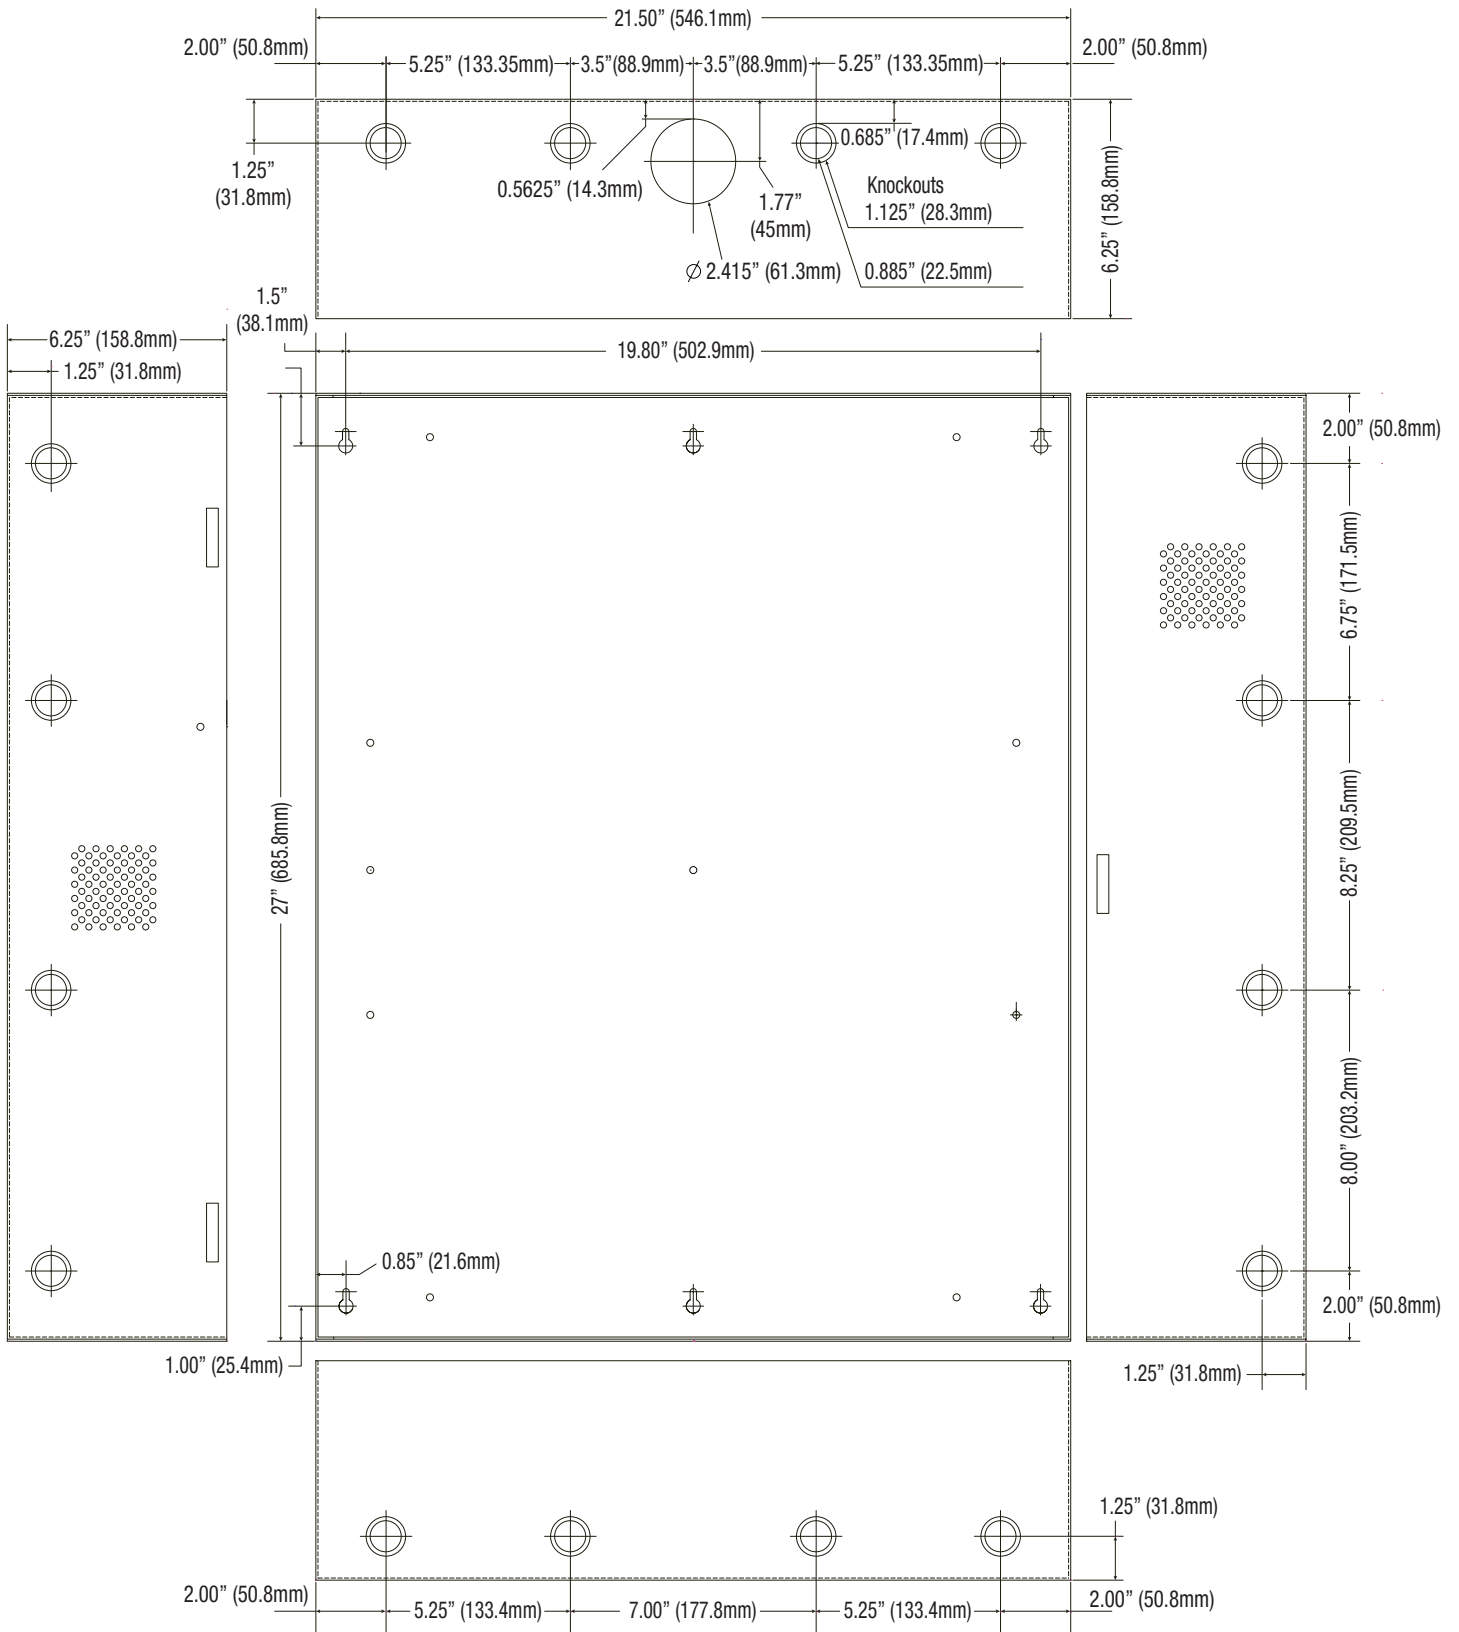

T3VK75F20 (Trove3) Enclosure Dimensions (H x W x D approximate):

36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)

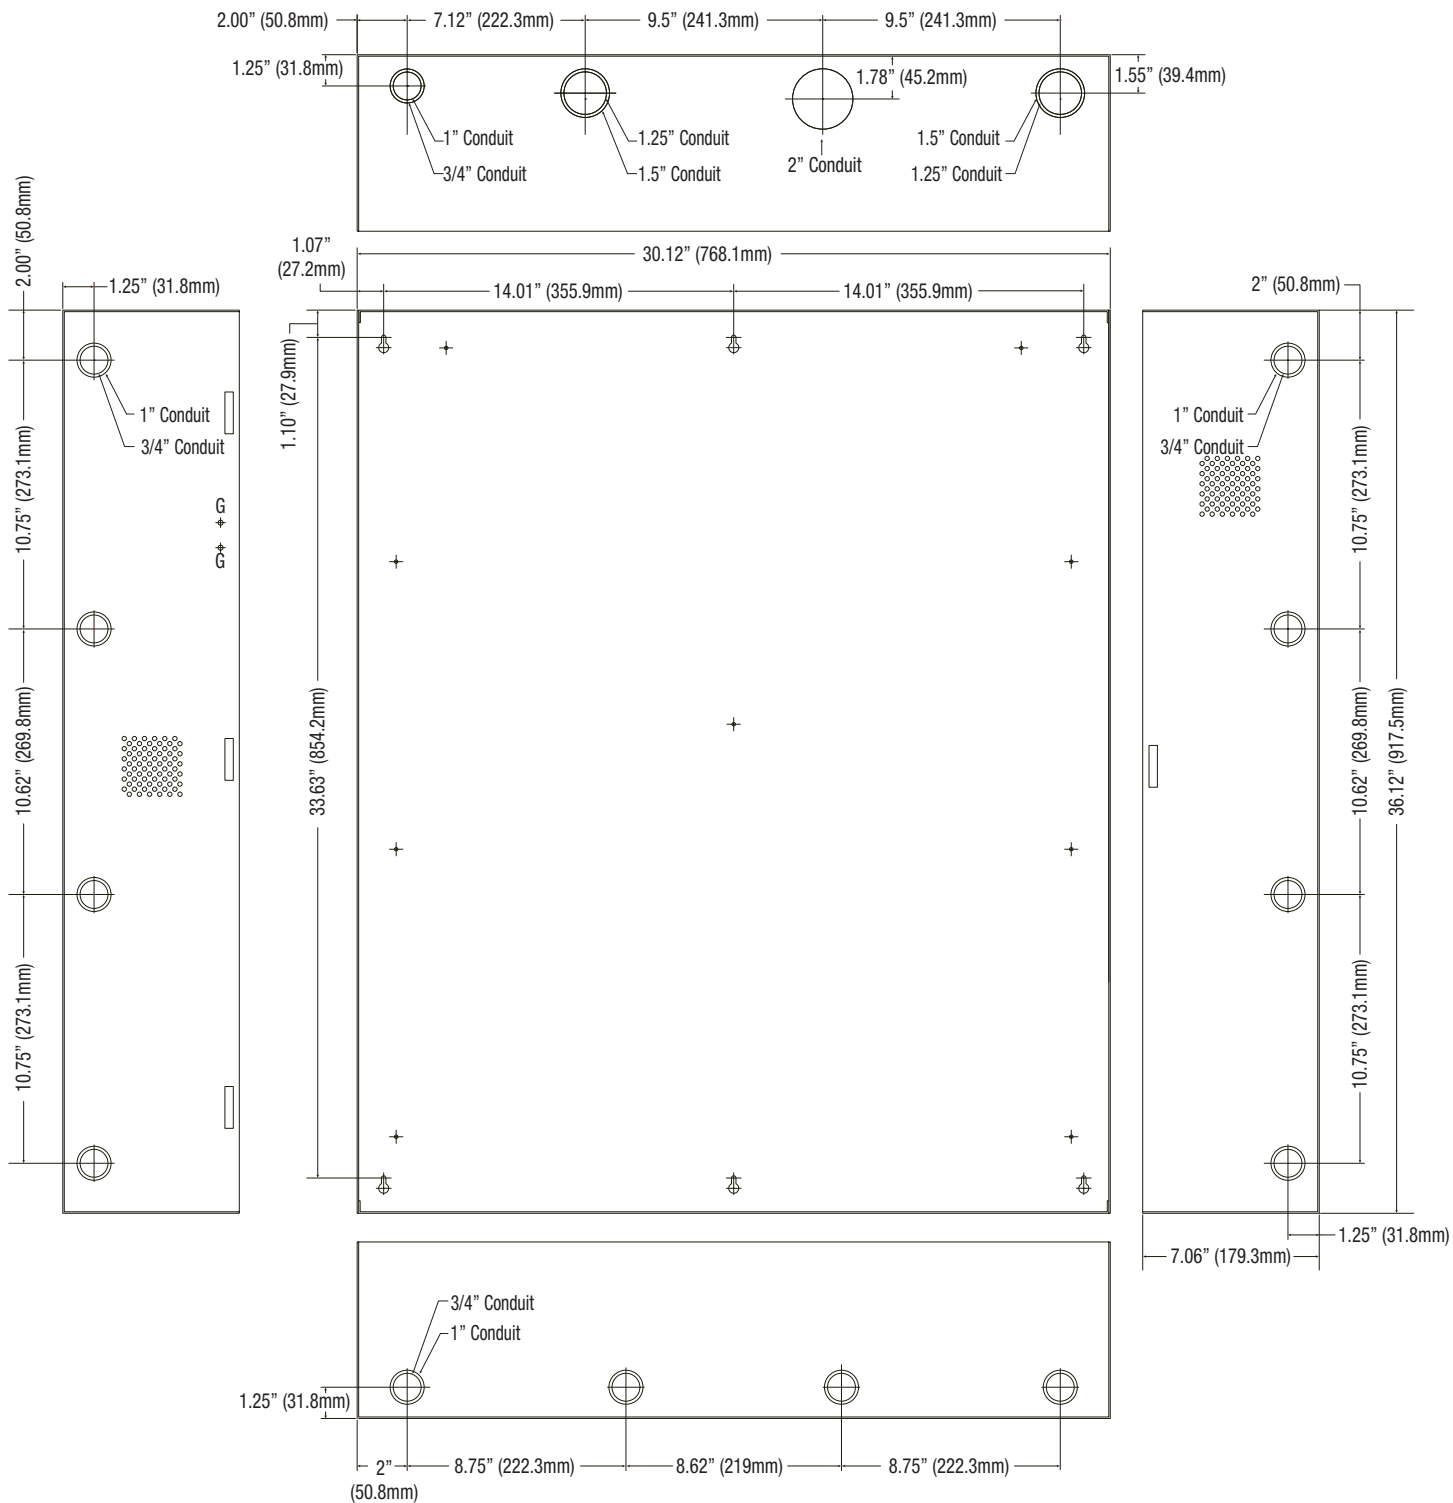

Altronix is not responsible for any typographical errors.

140 58th Street, Brooklyn, New York 11220 USA | phone: 718-567-8181 | fax: 718-567-9056
 web site: www.altronix.com | e-mail: info@altronix.com | Lifetime Warranty
 IITrove HID Aero Kits

E29X

